



Quick Start Guide Surge Arrester



EnGenius® DATASHEET

● Installation Guide

1. Place the unit in an appropriate place.
2. Plug one end of the Ethernet cable of Surge Arrester into the Wireless Device port of the RJ-45 Injector.
3. Place one end of another Ethernet cable of Surge Arrester into the Internal Network.

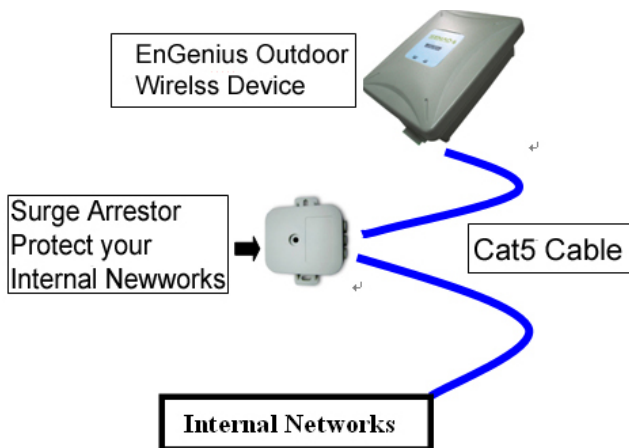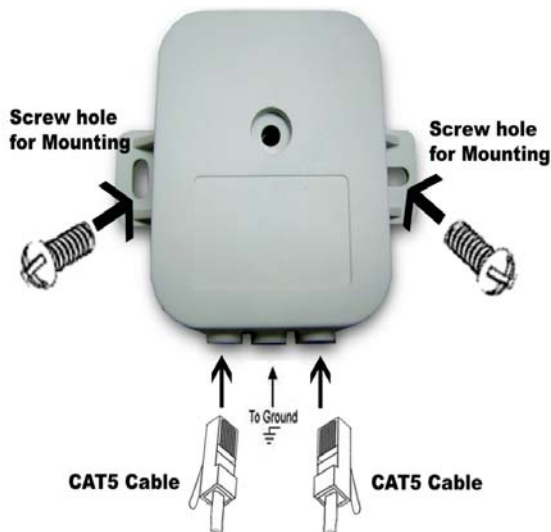

● Product Highlight

- 1) 10/100 Base-T CAT5 protection.
- 2) Convenient and integral mounting.
- 3) DC spark-over voltage : 75V +-25%
- 4) Impulse spark-over voltage : at 100V/us <=500V
at 1kV/us <=600V
- 5) RoHS Compliant
- 6) PCBA components

RJ-45
Surge absorber ES75XPA*10
PCB 2-layer FR-4 50x40x1.6mm
EARTH PARTS INCLUDE SCREW

** All specifications are subject to change without notice.
8/20/2007