




4 / 16 ch Solo Plus, Standalone NVR


NP-8040 / NP-8160

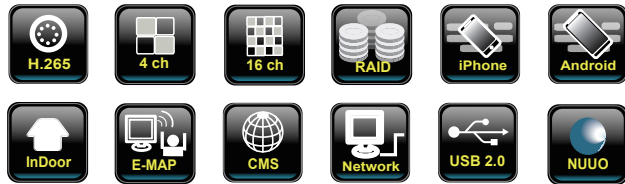

◆ Key Features

- └ Linux embedded - safer solution against PC crashes & virus
- └ Supports megapixel cameras and H.265 compression format
- └ Built-in With local HDMI/VGA display and keyboard/mouse
- └ One-click setup for more than 80 brands of IP cameras
- └ ezNUUO - free from router settings for web/mobile viewing
- └ Alarm source for NUUO Central Management System
- └ Web-based configuration, live viewer, playback
- └ Support mobile client for iPhone / iPad / Android

◆ Mechanical Dimension

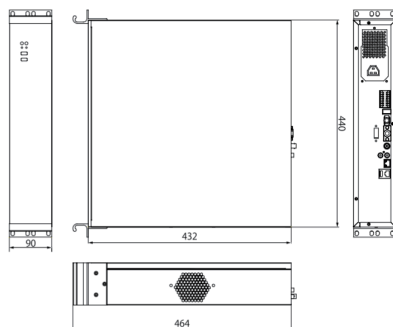

◆ Technical Specifications

Model	NP-8040 (4ch)	NP-8160 (16ch)
Maximum Number of Licenses	32	
Base License	4	16
Video Output	HDMI or VGA	
Output Resolution	3840×2160、2560×1440、1920×1080、1280×1024、1280×720、1024×768	
Decoding Capacity	480fps @1080p or 120fps @4K	
Recording Performance	200 Mbps	
Operating System	Embedded Linux	
Compression	H.265, H.264, MPEG-4, MJPEG, MxPEG (depends on IP camera)	
Remote Client	Remote Live Viewer (Software), Remote Live Viewer (Web), iViewer (Mobile App)	
Remote Client OS	Windows XP (32-bit), Win7 (32 and 64-bit)	
Mobile Client Platform	iPhone, iPad, Android	
HDD Bays	8 x 3.5"	
RAID Level	RAID 0, 1, 5, 10 (RAID will decrease Max Throughput)	
External Storage	DAS	
Ethernet Port	2 x Gigabit Port, RJ-45	
External Ports	3 x USB 2.0, 1 x USB 3.0	
Supported Languages	English, Croatian, Czech, Deutsch, Finnish, French, Italian, Japanese, Korean, Polish, Portuguese (Portugal), Portuguese (Brazil), Russian, Simplified Chinese, Traditional Chinese, Spanish, Swedish, Thai, Turkish and Hungarian	
Audio	Two - way	
Voltage	AC 100V~240V, 47Hz-63Hz	
Power Consumption	Without HDDs: 35W ; Maximum : 250W	
Temperature (Operating with HDD)	Operating: -10° C ~ 55° C (14° F ~ 131° F)	
Humidity (Operating)	Operating: 10% ~ 90%	
Dimensions (H x W x D)	90 (H) x 432 (W) x 440 (L) mm	
Weight (without HDD)	7 kg (15.43lbs)	

■ Specifications are subject to change without prior notice.