

## 8 Port Web Smart PoE Fast Ethernet Switch





### Switch-FE80MP



#### ◆ Key Features

- 8-port PoE Ports
- IEEE 802.3af PoE, up to 15.4W per port
- Offers Web-based configuration and management PoE SWITCH
- Power supply up to 130W
- Support Auto MDI/MDI-X

#### ◆ Mechanical Dimension

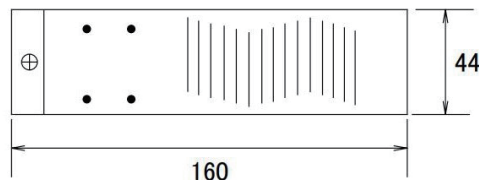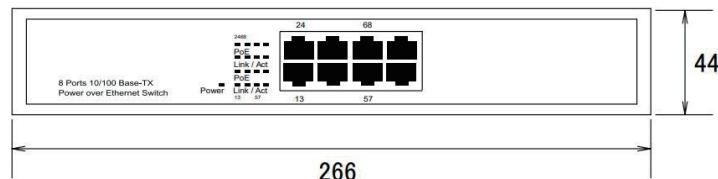

#### ◆ Technical Specifications

Model		Switch-FE80MP
Standard		IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE 802.1d, IEEE 802.1w, IEEE802.3ad, IEEE802.1q, IEEE 802.1p, IEEE 802.1X, IEEE802.3af (PoE)
Interface	RJ45 Total Port	8
	RJ45 PoE Port	8
	SFP Port	N/A
Mac Address Table Size		4K
Buffer Rate		1.25Mbits
Jumbo Frame		9KB
Switching Capacity		1Gbps
Data Transferring Rate		10Mbps / 100Mbps
PoE Standards		IEEE802.3af
Management Level		Web Smart
Forwarding Rate		100Mbps port: 148,800pps, 10Mbps port: 14,880pps
Cable		10Base-T Cat. 3, 4, 5: UTP/STP, 100Base-TX Cat. 5: UTP/STP
Power	Power Input	AC100~240V
	System Power Consumption	5.7W
LED indicator		Link/Act, PoE Act/Status, Power
PoE Power Consumption		Max 130W
Environment	Operating Temperature / Humidity	0°C ~ +50°C / 10% to 90% RH (non-condensing)
	Storage Temperature / Humidity	-20°C to +90°C / 10% to 90% RH (non-condensing)
Dimensions		44 × 266 × 160 mm (H x W x D)
Weight		1.8 kg
Certification		CE, FCC Class A

■ Specifications are subject to change without prior notice.