




HVR-7916HK



◆ Key Features

- └ AHD/TVI/CVI/CVBS/IP record.
- └ H.265 high profile compression algorithm, low bit rate, high picture quality.
- └ Dual stream - individual network video streaming and DVR record streaming.
- └ Phone remote view (iPhone / iPad / Android).
- └ Support P2P. QR code connection.
- └ Device ID setup for control keyboard.
- └ AHD/TVI 5MP/4MP camera input.

◆ Dimension

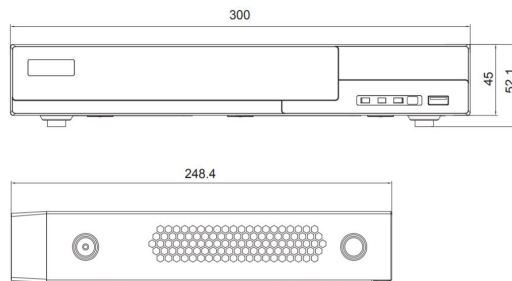

16 CH Hybrid 5IN1 DVR

◆ Technical Specifications

Model		HVR-7916HK	
Input	AHD/TVI/CVI	16CH	
	Max IPC Connection	16CH (8+8)	
	Total Connection	24CH	
Output	HDMI	1920x1080 / 1280x1024 / 1024x768	
	VGA	1920x1080 / 1280x1024 / 1024x768	
	CVBS	MAIN / SPOT	
Compression Method		H.265 High Profile	
Display Channel		1 / 4 / 9 / 16	
IPC Connection		4MP / 3MP / 1080P / 720P (Automatically adjustment by DVR)	
Recording Resolution	HD Analog	5MPL	160
		4MPL	192
		1080P	240
	HD Analog	720P/1080Lite/960H	480
		3MP/4MP	30/CH
		1080P/720P	30/CH
Access Load (Mbps)		32 (8CH), 72 (16CH)	
Simultaneously Local Playback		16CH	
Record Quality		Highest / Higher / Medium / Lower / Lowest	
Recording Mode		Auto / manual / schedule / motion / alarm	
Playback Mode		Date & Time search / Event search	
Multi-task		Live / Record / Play / Network / Backup	
Motion Detect		22x18 grids camera for all channel	
Audio		8 input, 1 output	
Alarm		16 input, 4 output	
Storage		SATA x 2(Support 10TB each)	
Backup		USB 2.0 / Network remote backup	
PTZ Control		PELCO-P, PELCO-D, CoC (UTC)	
Mobile Surveillance		iPhone / iPad / Android	
E-SATA		1	
Ethernet		10/100/1000 M Base-T	
Network-Function		Support licensed CMS / APP/ IE	
Network Connection		TCP/IP, PPPoE, DHCP, DDNS(Auto DDNS)	
Client Application		Display / Playback / Backup / DVR control / PTZ Control	
Power Source		DC12V	
Operating Temperature		5°C ~ 40°C (41°F ~ 104°F)	
Dimension		380(W) x 52.1(H) x 268.4(D) mm	

■ Specifications are subject to change without prior notice.