

4CH H.265+ Hybrid 5-in-1 DVR




HVR-7904HJ



◆ Key Features

- └ AHD/TVI/CVI/CVBS/IP record.
- └ H.265 high profile (H.265+) compression algorithm, low bit rate, high picture quality.
- └ Dual stream - individual network video streaming and DVR record streaming.
- └ Phone remote view (iPhone / iPad / Android).
- └ Operation log list / Network online users list check.
- └ Intensive security function by chosen AUTHORITY.
- └ HDD data retention days / Daylight saving time / NTP.

◆ Dimension

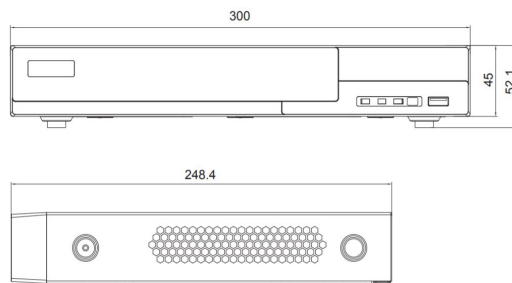

◆ Technical Specifications

Model		HVR-7904HJ
Input	AHD/TVI/CVI (Max.)	4CH
	IPC Connection Channel	6CH (1~6 selectable)
Simultaneously Local Playback (Max.)		4CH
Output	VGA	1920x1080 / 1280x1024
	HDMI	3840x2160 / 1920x1080 / 1280x1024 / 1024x768
	CVBS	1 (Simultaneously or SPOT)
Display Channel		1 / 4 / 9
Total Recording Resolution (HD Analog)	5MP	48
	5MPL	80
	4MP	48(PAL) / 60(NTSC)
	4MPL	100(PAL) / 120(NTSC)
	1080P	100(PAL) / 120(NTSC)
	720P/960H	100(PAL) / 120(NTSC)
IP Recording	Resolution	8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P
	Recording Rate	Max 25(PAL) / 30(NTSC) per channel
Record Quality		Highest / Higher / Medium / Lower / Lowest
Compression Method		H.265 High Profile (H.265+)
Recording Mode		Auto / manual / schedule / motion / alarm
Multi-task		Live / Record / Play / Network / Backup
Motion Detect		22 x18 grids camera for all channel
E-SATA		1
Backup Storage		USB 2.0 / Network remote backup SATA x1 (10TB)
Audio Input / Audio Output		RCA x4 input / RCA x1 output
Alarm Input / Audio Output		Input x4 ; Output x1
HDD Record Mode		Full stop / Overwrite
PTZ Control		PELCO-P, PELCO-D, CoC(UTC)
Mobile Surveillance		iPhone / iPad / Android
Ethernet		10/100 M Base-T
Network-Function		Support licensed CMS / APP/ IE
Network Connection		TCP/IP, PPPoE, DHCP, DDNS(Auto DDNS)
Client Application		Display / Playback / Backup / DVR control / PTZ Control
Power Source		DC12V
Power Consumption		≤10W
Operating Temperature		5°C ~ 40°C (41°F ~ 104°F)
Operating Humidity		Less than 90%
Dimension		300(W) x 52.1(H) x 248.4(D) mm
Weight		1.94kg

■ Specifications are subject to change without prior notice.