

MODEL : ZSA5858 – 80M1G

- Class AB Solid state
- Utilises the latest MOS-FET
- Broadband(Instantaneous Single Band)
- Linear Output Power
- Low Distortion
- Internal Systems Diagnostics and Status Indicator
- Bench Case
- 3Years Standard Warranty

Built – In Protection

- High Temperature
- Supply Voltage
- FWD Over Power
- REF Over Power

Maintenance

- Amplifier Designed For Minimal Maintenance
- Rapid Diagnostic
- Minimal Downtime

Other Amplifiers Available

- ZSA5050 – 80M1G ⇒ 100W
- ZSA5353 – 80M1G ⇒ 200W
- ZSA5555 – 80M1G ⇒ 300W
- ZSA6060 – 80M1G ⇒ 1000W
- ZSA6262 – 80M1G ⇒ 1500W


Applications

- EMC Tests
- RF Tests And Instrumentation
- Radio communication
- Measurement And Research Laboratories

Additional Options

- RF Connector Type
- RF Sample Port (Front or Rear Panel)
- Detected Sample Port (Front or Rear Panel)
- RF Input Switch
- Gain Control
- IEEE488 Control


Outline Drawing ※ In Millimeters

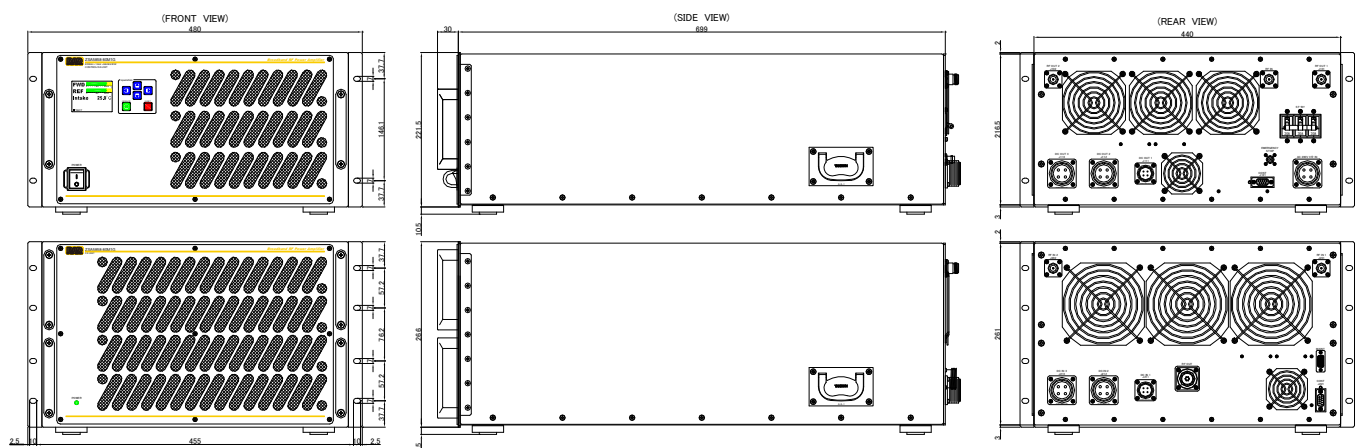

Specifications

• Frequency Bandwidth	80MHz - 1GHz
• Rated Output Power(3dB Gain Compression)	600W CW (min)
• Rated Output Power(1dB Gain Compression)	500W CW (min)
• Class Type	Class AB
• Gain	58dB (min)
• Gain Flatness	±3.0dB (max)
• Impedance	50ohms nominal
• Harmonics	-20dBc (max) @Po=500W
• Spurious	-70dBc (max) @Po=500W
	-80dBc (typical)
• Input VSWR	2:1 (max)
• Output VSWR	3:1 (max)
• RF Input Connector	N-Female (Rear Panel)
• RF Output Connector	7/16-Female (Rear Panel)
• Input Power	+3dBm (max)
• Operating Temperature	0°C - +40°C
• Room Temperature Storage	-20°C - +70°C
• Cooling	Forced Air (Self Contained Fans)
• Power Voltage	200-240VAC, 50 - 60Hz, Three Phase
• Rated Current	22A at 200VAC Three Phase
• Weight	95kg
• Dimensions	CONTROL/DA UNIT (W)480 x (D)700 x (H)221.5 mm
	FINAL AMP UNIT (W)480 x (D)700 x (H)266 mm
• Safety Interlock	Connector Type BNC-Female

Model ZSA5858-80M1G Typical Power Output

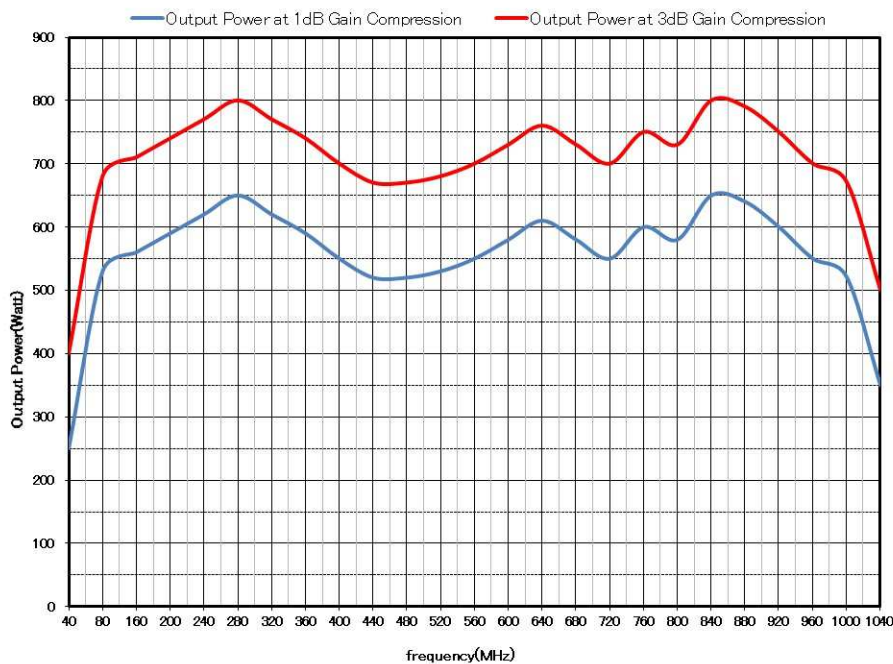

※ Continual operation exceeded specified power-output may cause product damage.