

MODEL : ZSA6363 – 80M1GA

- Class A Solid state
- Broadband(Instantaneous Single Band)
- Linear Output Power
- Low Distortion
- Internal Systems Diagnostics and Status Indicator
- Bench Case
- 3Years Standard Warranty

Built – In Protection

- High Temperature
- Supply Voltage
- FWD Over Power
- REF Over Power

Maintenance

- Amplifier Designed For Minimal Maintenance
- Rapid Diagnostic
- Minimal Downtime

Applications


- EMC Tests
- RF Tests And Instrumentation
- Radio communication
- Measurement And Research Laboratories

Additional Options

- RF Connector Type
- RF Sample Port (Front or Rear Panel)
- Detected Sample Port (Front or Rear Panel)
- RF Input Switch
- Gain Control

Outline Drawing


※ In Millimeters

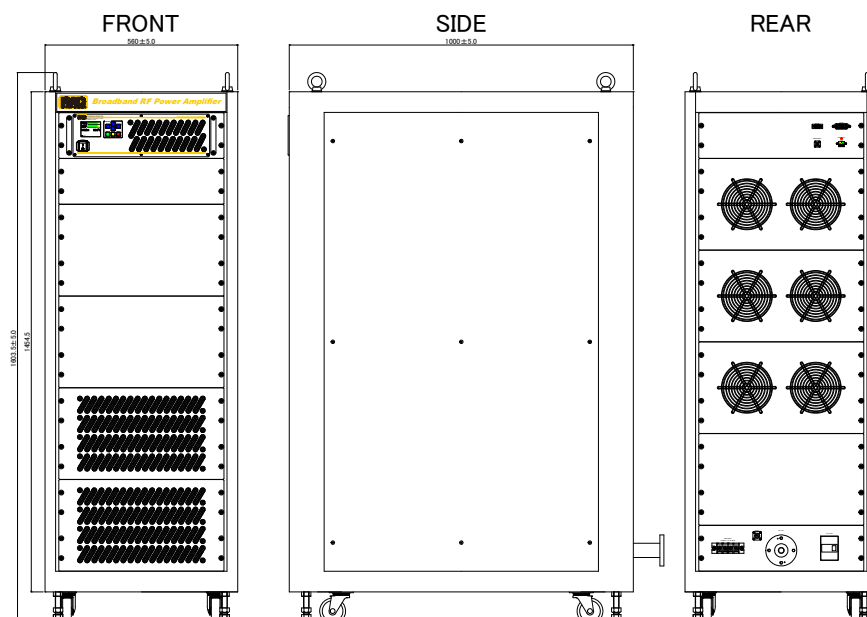

Specifications

• Frequency Bandwidth	80MHz - 1GHz
• Rated Output Power(1dB Gain Compression)	2kW CW (min)@80M~500MHz 1.8kW CW (min)@500M~1GHz
• Class Type	Class A
• Gain	63dB (min)
• Gain Flatness	± 3.5 dB (max)
• Impedance	50ohms nominal
• Harmonics	-18dBc (min) @Po=minimum P1dB SPEC
• Spurious	-70dBc (max) @Po=minimum P1dB SPEC
• Input VSWR	2:1 (max)
• RF Input Connector	N-Female (Rear Panel)
• RF Output Connector	1_5/8" EIA (Rear Panel)
• Input Power	+3dBm (max)
• Operating Temperature	0°C - +35°C
• Room Temperature Storage	-20°C - +50°C
• Cooling	Forced Air (Self Contained Fans)
• Power Voltage	200-240VAC, 50 - 60Hz, Three Phase
• Rated Current	50A at 200VAC Three Phase
• Weight	350kg
• Dimensions	19"System Rack /EIA 30U (W)560×(D)1000×(H)1603.5 mm
• Safety Interlock	Connector Type BNC-Female
• REMOTE	IEEE488 Ethernet

Model ZSA6363-80M1GA Typical Power Output

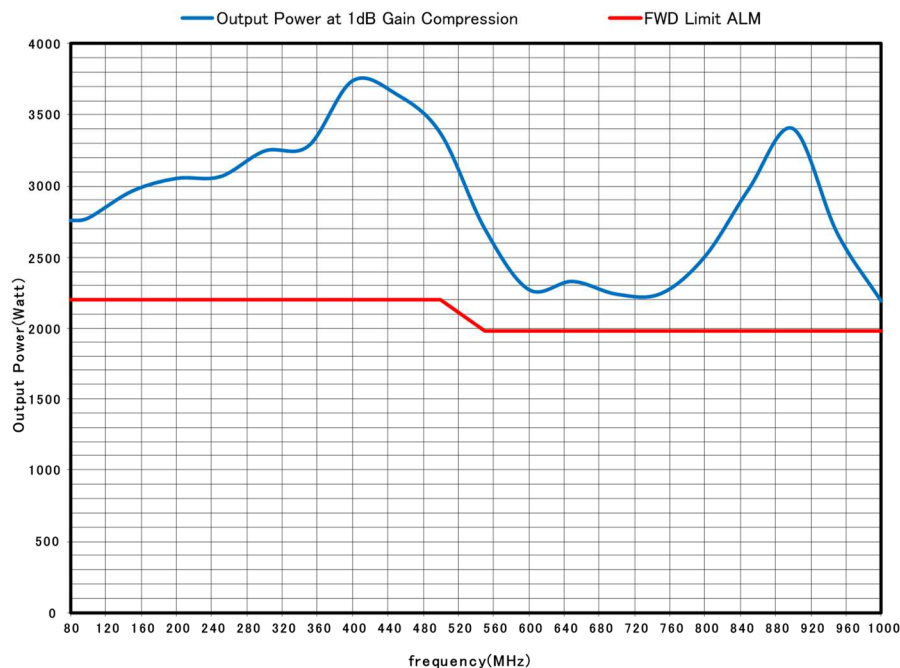

※ Continual operation exceeded specified power-output may cause product damage.