


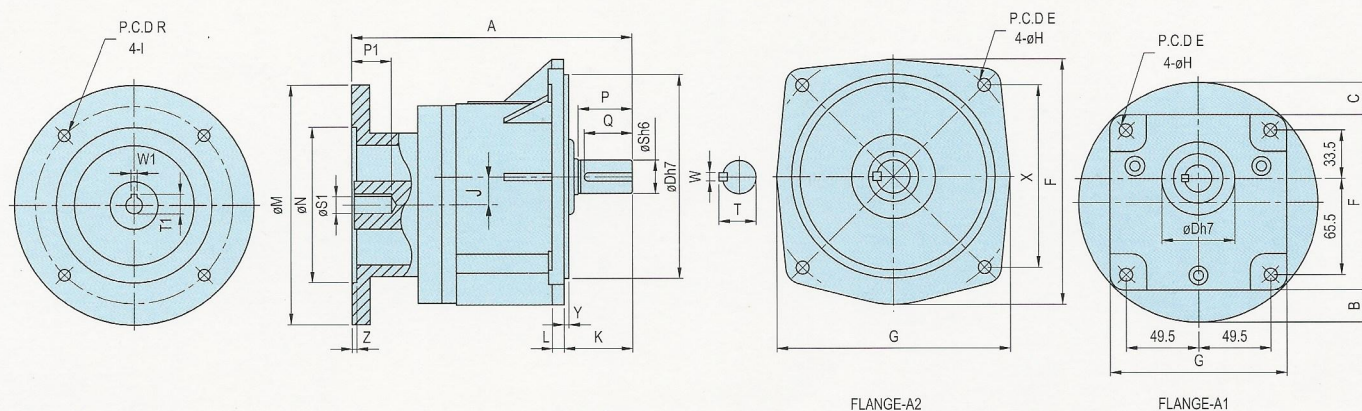

18#~50#

尺寸表 DIMENSION *in millimeter

馬力 HP	減速比 Gear Ratio	框號 Type	A	B	C	D	E	F	G	H	I	J	K	L	M	N	R	X	Y	Z	出力軸					入力軸				重量 Kg	法蘭
																					P	Q	S	T	W	P1	S1	T1	W1		
100W	5~40	18	161	20	20	50	140	120	120	9	M8	16.5	40	10	160	110	130	99	5	4	30	27	18	20	5	26	11	12.7	4	5.0	A1
1/8HP(4P)	50~200	22	193	7	---	148	185	176	165	11	M8	19	50	12	160	110	130	131	3.5	4	40	35	22	25	7	26	11	12.7	4	6.2	A2
200W	5~10	18	161	20	20	50	140	120	120	9	M8	16.5	40	10	160	110	130	99	5	4	30	27	18	20	5	26	11	12.7	4	5.0	A1
	12.5~25	18	161	20	20	50	140	120	120	9	M8	16.5	40	10	160	110	130	99	5	4	30	27	18	20	5	26	11	12.7	4	5.0	A2
1/4HP(4P)	12.5~100	22	193	7	---	148	185	176	165	11	M8	19	50	12	160	110	130	131	3.5	4	40	35	22	25	7	26	11	12.7	4	6.2	A2
	100~200	28	225	---	---	170	215	205	195	11	M8	23.11	60	13	160	110	130	152	4	4	45	40	28	31	7	26	11	12.7	4	7.5	A2
400W	5~10	22	193	7	---	148	185	176	165	11	M8	19	50	12	160	110	130	131	3.5	4	40	35	22	25	7	33	14	16.2	5	6.2	A2
	12.5~25	22	193	7	---	148	185	176	165	11	M8	19	50	12	160	110	130	131	3.5	4	40	35	22	25	7	33	14	16.2	5	6.2	A2
1/2HP(4P)	12.5~100	28	225	---	---	170	215	205	195	11	M8	23.11	60	13	160	110	130	152	4	4	45	40	28	31	7	33	14	16.2	5	7.5	A2
	100~200	32	261	---	---	185	255	241	225	15	M8	30.22	70	15	160	110	130	170	4	4	55	50	32	36.5	10	33	14	16.2	5	19	A2
750W	5~25	28	237	17.5	---	170	215	205	195	11	M10	23.11	60	13	200	130	165	152	4	4.5	45	40	28	31	7	43	19	21.7	6	7.5	A2
	30~120	32	273	2	---	185	255	241	225	15	M10	30.22	70	15	200	130	165	170	4	4.5	55	50	32	36.5	10	43	19	21.7	6	20.5	A2
	120~200	40	328	---	---	230	310	297	268	15	M10	37.96	77	20	200	130	165	219	5	4.5	65	60	40	44.5	10	43	19	21.7	6	39	A2
1500W	5~30	32	290	2	---	185	255	241	225	15	M10	30.22	70	15	200	130	165	170	4	4.5	55	50	32	36.5	10	53	24	27.2	8	20.5	A2
	40~100	40	345	---	---	230	310	297	268	15	M10	37.96	77	20	200	130	165	219	5	4.5	65	60	40	44.5	10	53	24	27.2	8	39	A2
	120~200	50	400	13.5	---	280	390	360	338	19	M10	51	97	22	200	130	165	276	5	4.5	80	75	50	56	14	53	24	27.2	8	52.2	A2
2200W	5~10	32	303	27	---	185	255	241	225	15	M12	30.22	70	15	250	180	215	170	4	4.5	55	50	32	36.5	10	63	28	31.2	8	21.5	A2
	15~60	40	359	2.5	---	230	310	297	268	15	M12	37.96	77	20	250	180	215	219	5	4.5	65	60	40	44.5	10	63	28	31.2	8	40	A2
	75~100	50	413	13.5	---	280	390	360	338	19	M12	51	97	22	250	180	215	276	5	4.5	80	75	50	56	14	63	28	31.2	8	54	A2
3700W	5~20	40	359	2.5	---	230	310	297	268	15	M12	37.96	77	20	250	180	215	219	5	4.5	65	60	40	44.5	10	63	28	31.2	8	50	A2
	25~60	50	413	13.5	---	280	390	360	338	19	M12	51	97	22	250	180	215	276	5	4.5	80	75	50	56	14	63	28	31.2	8	54	A2

1. 為輕扭力之機型。 3. 馬達配合螺絲孔 1HP~2HP 為 M10*P1.5。
2. 馬達配合螺絲孔 1/8HP~1/4HP 為 M8*P1.25。 4. 馬達配合螺絲孔 3HP 為 M12*P1.75。