


Type : GHM

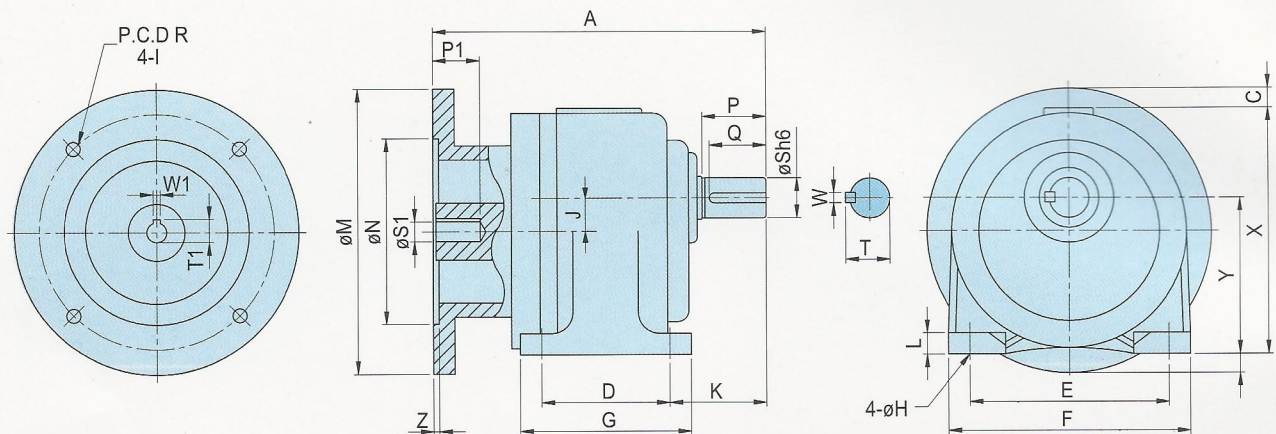

18#~50#

尺寸表 DIMENSION *in millimeter

馬力 HP	減速比 Gear Ratio	框號 Type	A	B	C	D	E	F	G	H	I	J	K	L	M	N	R	X	Y	Z	出力軸					入力軸				重量 Kg
																					P	Q	S	T	W	P1	S1	T1	W1	
100W 1/8HP(4P)	5~40	18	161	11.5	21.5	40	110	135	65	9	M8	16.5	50	10	160	110	130	127	85	4	30	27	18	20	5	26	11	12.7	4	5.0
	50~200	22	193	9	6	65	130	155	90	11	M8	19	60	12	160	110	130	145	90	4	40	35	22	25	7	26	11	12.7	4	6.2
200W 1/4HP(4P)	5~10	18	161	11.5	21.5	40	110	135	65	9	M8	16.5	50	10	160	110	130	127	85	4	30	27	18	20	5	26	11	12.7	4	5.0
	12.5~25	18	161	11.5	21.5	40	110	135	65	9	M8	16.5	50	10	160	110	130	127	85	4	30	27	18	20	5	26	11	12.7	4	5.0
	12.5~100	22	193	9	6	65	130	155	90	11	M8	19	60	12	160	110	130	145	90	4	40	35	22	25	7	26	11	12.7	4	6.2
	100~200	28	225	---	---	90	140	170	120	11	M8	23.11	70	15	160	110	130	170	110	4	45	40	28	31	7	26	11	12.7	4	7.5
400W 1/2HP(4P)	5~10	22	193	9	6	65	130	155	90	11	M8	19	60	12	160	110	130	145	90	4	40	35	22	25	7	33	14	16.2	5	6.2
	12.5~25	22	193	9	6	65	130	155	90	11	M8	19	60	12	160	110	130	145	90	4	40	35	22	25	7	33	14	16.2	5	6.2
	12.5~100	28	225	---	---	90	140	170	120	11	M8	23.11	70	15	160	110	130	170	110	4	45	40	28	31	7	33	14	16.2	5	7.5
	100~200	32	261	---	---	130	170	210	167	13	M8	30.22	70	18	160	110	130	204	130	4	55	50	32	36.5	10	33	14	16.2	5	19
750W 1HP(4P)	5~25	28	237	13.5	---	90	140	170	120	11	M10	23.11	70	15	200	130	165	170	110	4.5	45	40	28	31	7	43	19	21.7	6	7.5
	30~120	32	273	---	---	130	170	210	167	13	M10	30.22	70	18	200	130	165	204	130	4.5	55	50	32	36.5	10	43	19	21.7	6	20.5
	120~200	40	328	---	---	150	210	260	200	15	M10	37.96	84	23	200	130	165	252	160	4.5	65	60	40	44.5	10	43	19	21.7	6	39
1500W 2HP(4P)	5~30	32	290	---	---	130	170	210	167	13	M10	30.22	70	18	200	130	165	204	130	4.5	55	50	32	36.5	10	53	24	27.2	8	20.5
	40~100	40	345	---	---	150	210	260	200	15	M10	37.96	84	23	200	130	165	252	160	4.5	65	60	40	44.5	10	53	24	27.2	8	39
	120~200	50	400	---	---	170	265	330	230	19	M10	51	122	30	200	130	165	305	200	4.5	80	75	50	56	14	53	24	27.2	8	52.2
2200W 3HP(4P)	5~10	32	303	---	---	130	170	210	167	13	M12	30.22	70	18	250	180	215	204	130	4.5	55	50	32	36.5	10	63	28	31.2	8	21.5
	15~60	40	359	3	---	150	210	260	200	15	M12	37.96	84	23	250	180	215	252	160	4.5	65	60	40	44.5	10	63	28	31.2	8	40
	75~100	50	413	---	---	170	265	330	230	19	M12	51	122	30	250	180	215	305	200	4.5	80	75	50	56	14	63	28	31.2	8	54
3700W 5HP(4P)	5~20	40	359	3	---	150	210	260	200	15	M12	37.96	84	23	250	180	215	252	160	4.5	65	60	40	44.5	10	63	28	31.2	8	40
	25~60	50	413	---	---	170	265	330	230	19	M12	51	122	30	250	180	215	305	200	4.5	80	75	50	56	14	63	28	31.2	8	54

1. 為輕扭力之機型。
2. 32~50筒齒箱上附加O型吊環(高度約50mm)。

3. 中間點螺絲孔1/8~1/4HP 為M8*P1.25.
1/2~2HP為M10*P15.
3HP為M12*P1.75.