


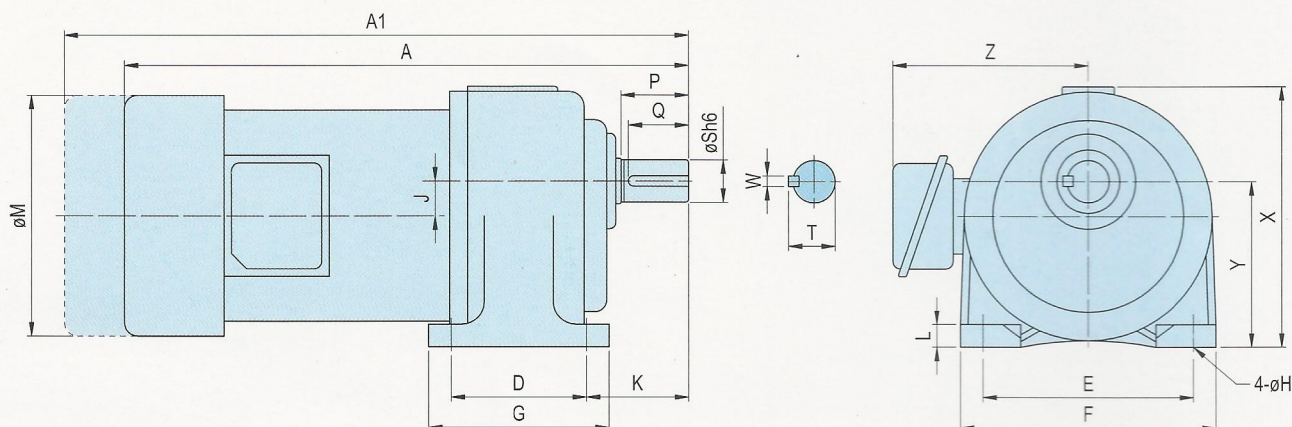

18#~50#

尺寸表 DIMENSION *in millimeter

馬力 HP	減速比 Gear Ratio	框號 Type	A	A1	D	E	F	G	H	L	J	K	M	X	Y	Z	出力軸					重量 Kg
																	P	Q	S	T	W	
100W 1/8HP(4P)	5~40	18	248	278	40	110	135	65	9	10	16.5	50	127	127	85	116	30	27	18	20	5	5.6
	50~200	22	277	307	65	130	155	90	11	12	19	60	127	145	90	116	40	35	22	25	7	7.0
	250~1800	22	333	363	65	130	155	90	11	12	19	60	127	145	90	116	40	35	22	25	7	8.9
	250~1800	28	391	421	90	140	170	120	11	15	23.11	70	127	170	110	116	45	40	28	31	7	11.6
200W 1/4HP(4P)	5~10	18	268	298	40	110	135	65	9	10	16.5	50	127	127	85	116	30	27	18	20	5	6.4
	12.5~25	18	268	298	40	110	135	65	9	10	16.5	50	127	127	85	116	30	27	18	20	5	6.4
	12.5~100	22	297	327	65	130	155	90	11	12	19	60	127	145	90	116	40	35	22	25	7	7.9
	100~200	28	313	343	90	140	170	120	11	15	23.11	70	127	170	110	116	45	40	28	31	7	10.3
	250~1800	28	411	441	90	140	170	120	11	15	23.11	70	127	170	110	116	45	40	28	31	7	12.4
	250~1800	32	471	501	130	170	210	167	13	18	30.22	70	127	204	130	116	55	50	32	36.5	10	24.6
400W 1/2HP(4P)	5~10	22	317	347	65	130	155	90	11	12	19	60	127	145	90	116	40	35	22	25	7	10.6
	12.5~25	22	317	347	65	130	155	90	11	12	19	60	127	145	90	116	40	35	22	25	7	10.6
	12.5~100	28	348	378	90	140	170	120	11	15	23.11	70	173	170	110	131	45	40	28	31	7	13.0
	100~200	32	378	408	130	170	210	167	13	18	30.22	70	173	204	130	131	55	50	32	36.5	10	25.2
	250~1800	32	486	516	130	170	210	167	13	18	30.22	70	173	204	130	131	55	50	32	36.5	10	27.6
	250~1800	40	559	589	150	210	260	200	15	23	37.96	84	173	252	160	131	65	60	40	44.5	10	45.2
750W 1HP(4P)	5~25	28	373	403	90	140	170	120	11	15	23.11	70	173	170	110	131	45	40	28	31	7	14.7
	30~120	32	403	433	130	170	210	167	13	18	30.22	70	173	204	130	131	55	50	32	36.5	10	27.8
	120~200	40	462	492	150	210	260	200	15	23	37.96	84	173	252	160	131	65	60	40	44.5	10	45.2
	250~1800	40	584	614	150	210	260	200	15	23	37.96	84	173	252	160	131	65	60	40	44.5	10	47.7
	250~1800	50	631	661	170	265	330	230	19	30	51	122	173	305	200	---	80	75	50	56	14	60.5
1500W 2HP(4P)	5~30	32	443	473	130	170	210	167	13	18	30.22	70	190	204	130	138	55	50	32	36.5	10	32.2
	40~100	40	496	526	150	210	260	200	15	23	37.96	84	190	252	160	138	65	60	40	44.5	10	47.7
	120~200	50	550	580	170	265	330	230	19	30	51	122	190	305	200	---	80	75	50	56	14	63.4
2200W 3HP(4P)	5~10	32	453	483	130	170	210	167	13	18	30.22	70	190	204	130	138	55	50	32	36.5	10	35.2
	15~60	40	506	536	150	210	260	200	15	23	37.96	84	190	252	160	138	65	60	40	44.5	10	49.1
	75~100	50	580	610	170	265	330	230	19	30	51	122	190	305	200	---	80	75	50	56	14	58.3
3700W 5HP(4P)	5~20	40	540	570	150	210	260	200	15	23	37.96	84	236	252	160	190	65	60	40	44.5	10	55.2
	25~60	50	600	630	170	265	330	230	19	30	51	122	236	305	200	190	80	75	50	56	14	63.4

1. A1之長度為馬達附剎車之總長。

2. 為輕扭力之機型。

3. 1/8~1HP之附剎車重量，約無剎車重量加2KG。

4. 2~3HP之附剎車重量，約無剎車重量加3.5KG。

5. 32~50筒齒箱上附加O型吊環(高度約50mm)。