


Type : GHD

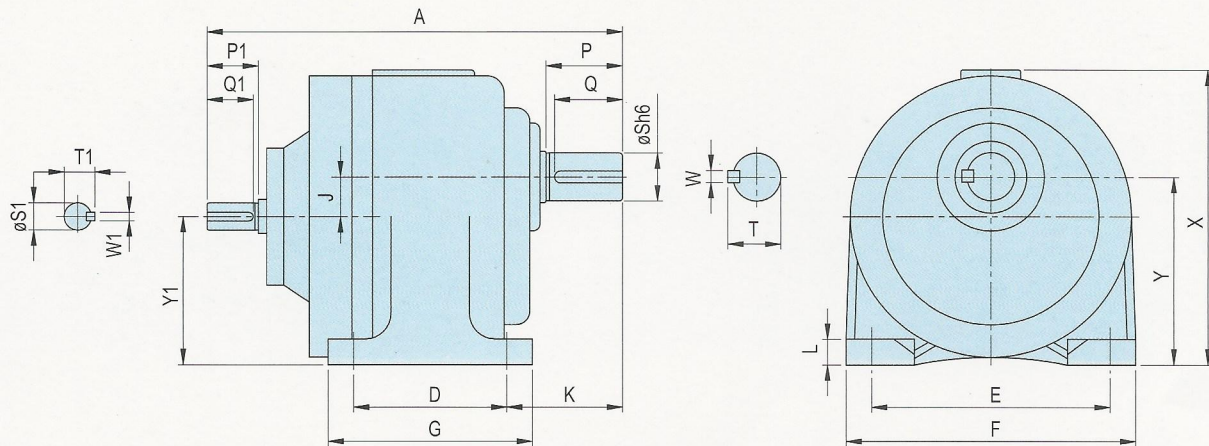

18#~50#

尺寸表 DIMENSION *in millimeter

馬力 HP	減速比 Gear Ratio	框號 Type	A	D	E	F	G	H	J	K	L	X	Y	出力軸					入力軸					重量 Kg
														P	Q	S	T	W	P1	Q1	S1	T1	W1	
100W 1/8HP(4P)	5~40	18	167	40	110	135	65	9	16.5	50	10	127	85	30	27	18	20	5	25	22	14	15.5	4	3.0
	50~200	22	198	65	130	155	90	11	19	60	12	145	90	40	35	22	25	7	25	22	14	15.5	4	4.2
200W 1/4HP(4P)	5~10	18	167	40	110	135	65	9	16.5	50	10	127	85	30	27	18	20	5	25	22	14	15.5	4	3.0
	12.5~25	18	167	40	110	135	65	9	16.5	50	10	127	85	30	27	18	20	5	25	22	14	15.5	4	3.0
	12.5~100	22	198	65	130	155	90	11	19	60	12	145	90	40	35	22	25	7	25	22	14	15.5	4	4.2
	100~200	28	243	90	140	170	120	11	23.11	70	15	170	110	45	40	28	31	7	30	27	16	18.0	5	5.5
400W 1/2HP(4P)	5~10	22	198	65	130	155	90	11	19	60	12	145	90	40	35	22	25	7	25	22	14	15.5	4	4.2
	12.5~25	22	198	65	130	155	90	11	19	60	12	145	90	40	35	22	25	7	25	22	14	15.5	4	4.2
	12.5~100	28	243	90	140	170	120	11	23.11	70	15	170	110	45	40	28	31	7	30	27	16	18.0	5	5.5
	100~200	32	302	130	170	210	167	13	30.22	70	18	204	130	55	50	32	36.5	10	30	27	19	21.0	5	17
750W 1HP(4P)	5~25	28	243	90	140	170	120	11	23.11	70	15	170	110	45	40	28	31	7	30	27	16	18.0	5	6.5
	30~120	32	302	130	170	210	167	13	30.22	70	18	204	130	55	50	32	36.5	10	30	27	19	21.0	5	19.5
	120~200	40	363	150	210	260	200	15	37.96	84	23	252	160	65	60	40	44.5	10	35	32	24	27.0	7	38
1500W 2HP(4P)	5~30	32	302	130	170	210	167	13	30.22	70	18	204	130	55	50	32	36.5	10	30	27	19	21.0	5	19.5
	40~100	40	363	150	210	260	200	15	37.96	84	23	252	160	65	60	40	44.5	10	35	32	24	27.0	7	38
	120~200	50	483	170	265	330	230	19	51	122	30	305	200	80	75	50	56	14	55	45	35	39.5	10	51.2
2200W 3HP(4P)	5~10	32	302	130	170	210	167	13	30.22	70	18	204	130	55	50	32	36.5	10	30	27	19	21.0	5	20.5
	15~60	40	363	150	210	260	200	15	37.96	84	23	252	160	65	60	40	44.5	10	35	32	24	27.0	7	39
	75~100	50	483	170	265	330	230	19	51	122	30	305	200	80	75	50	56	14	55	45	35	39.5	10	53
3700W 5HP(4P)	5~20	40	363	150	210	260	200	15	37.96	84	23	252	160	65	60	40	44.5	10	35	32	24	27.0	7	39
	25~60	50	483	170	265	330	230	19	51	122	30	305	200	80	75	50	56	14	55	45	35	39.5	10	53

1. 為輕扭力之機型.
2. 32~50筒齒箱上附加O型吊環(高度約50mm).