



T B — 1 0 / 2 0

端子台



TB-10





2.5

側邊檔片 TB-01,02




TB-20

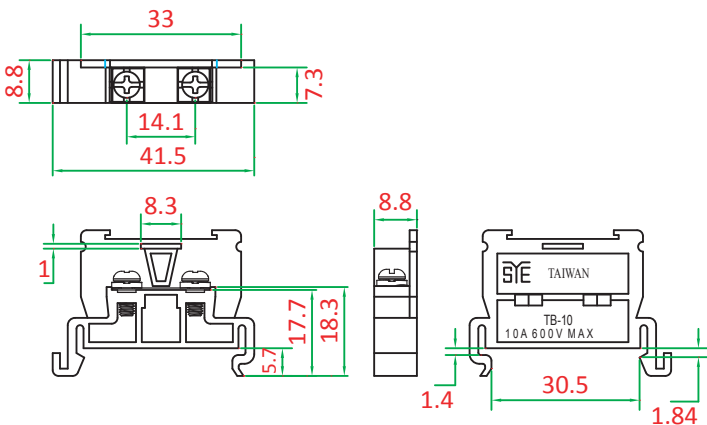

TB-10

SYE 詳盈電機有限公司

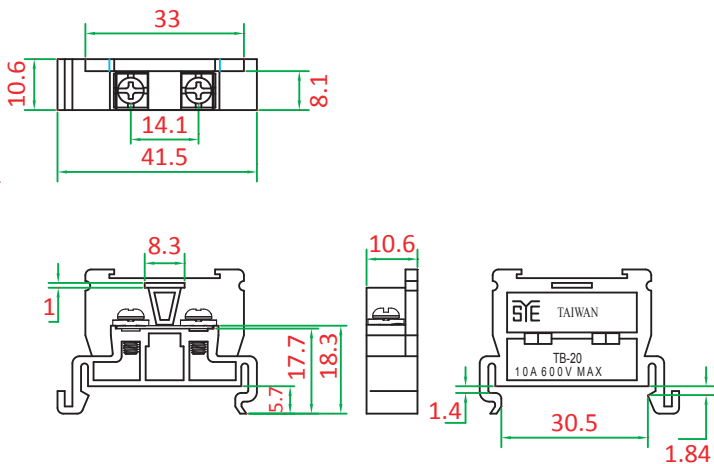

TB-20

SYE 詳盈電機有限公司

產品資訊 Products Information

一般特性 / General characteristics

耐壓強度 Dielectric strength	2000V/AC 1Min
絕緣強度 Insulation resistance	DC 1000V≥500MΩ
額定負載 Load rating	額定電壓 Voltage rating →600V AC
	額定電流 Current rating →10 Amp (TB-10)
	額定電流 Current rating →20 Amp (TB-20)
熱變形溫度(HDT) Heat Deflection Temperature	100℃ / 212°F
燃燒性 Flammability ratings	UL-94V2

主要材質 / Material

本體 Body	工業塑膠 (Industrial Plastic)	PC
導體 Conductor	青銅 (Bronze)	
螺絲 Screw	螺絲 Screw	TB-10 : 3x7x6.8 TB-20 : 3.5x7x7.2
	螺帽 Nut	TB-10 : 3mm x 5.5 CHQ302 TB-20 : 3.5mm x 6 CHQ302
	硬度 Hardness	HV 200-220

其 他 / Other

重量 Weight	6 ± 1g (TB-10)
	8 ± 1g (TB-20)
包裝 Packing	TB-10 : 100 pcs per case TB-20 : 90 pcs per case