

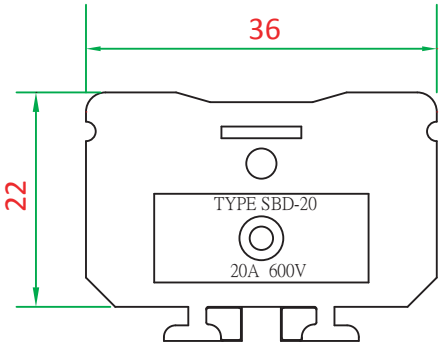
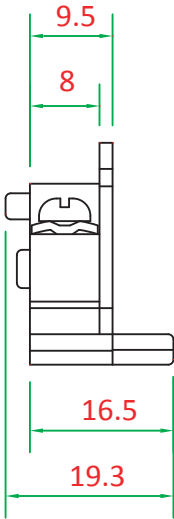
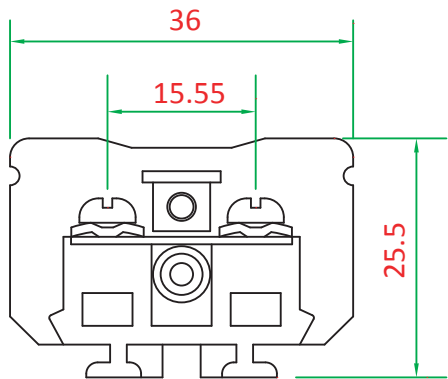


-Terminal Block Series-

S B D — 2 0 春日型卡式軌道式端子台

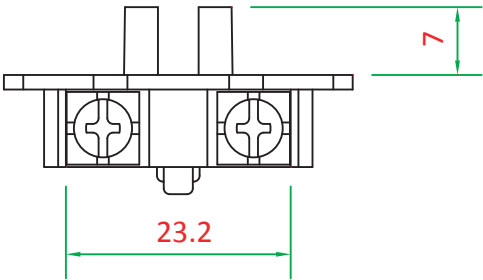

產品資訊
Products Information



一般特性 / General characteristics

耐壓強度 Dielectric strength	2000V/AC 1Min
絕緣強度 Insulation resistance	DC 500V≥500MΩ
額定負載 Load rating	額定電壓 Voltage rating →600V AC 額定電流 Current rating →20 Amp
熱變形溫度(HDT) Heat Deflection Temperature	100℃ / 212°F
燃燒性 Flammability ratings	UL-94V2

主要材質 / Material

本體 Body	工業塑膠 PC+GF(FRP) (Industrial Plastic)	
導體 Conductor	青銅 (bronze)	
螺絲 Screw	螺絲 Screw	3.5 x 7 x 6.7 mm
	螺帽 Nut	3.5mm x 6 CHQ302
	硬度 Hardness	HV 200-220

其 他 / Other

重量 Weight	8 ± 1g
包裝 Packing	100 pcs per case
適用端子台 Applicable Terminal block	台灣Taiwan → TBC-10、SBD-10、SLR-10 國外 Overseas → TR-10SK