



-Timer Socket Series-



P 3 G — 0 8 / 0 8 E 計時器座



P3G-08




P3G-08E

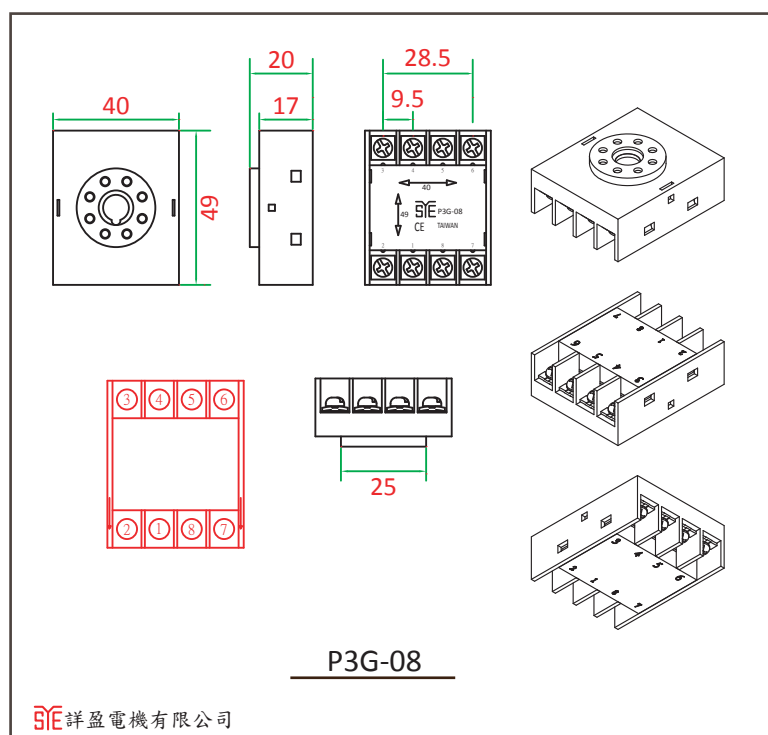

P3G-08

SE 詳盈電機有限公司

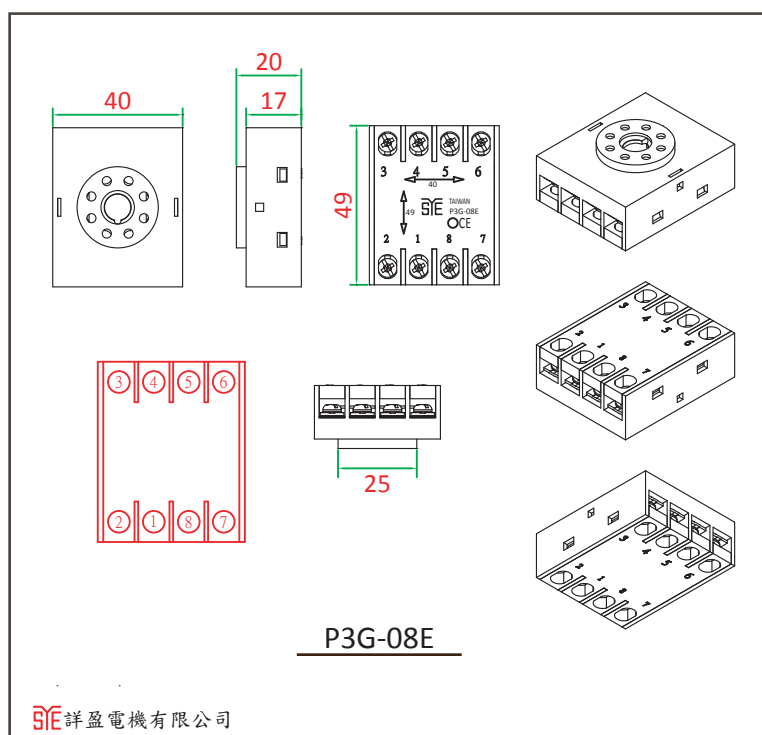

P3G-08E

SE 詳盈電機有限公司



產 品
Products

資 訊
Information



一般特性 / General characteristics

耐壓強度 Dielectric strength	2000V/AC 1Min
絕緣強度 Insulation resistance	DC 500V≥500MΩ
額定負載 Load rating	額定電壓 Voltage rating →250V AC 額定電流 Current rating →10 Amp
熱變形溫度(HDT) Heat Deflection Temperature	100℃ / 212°F
燃燒性 Flammability ratings	UL-94V2

主要材質 / Material

本體 Body	工業塑膠 (Industrial Plastic)	PC+GF(FRP)
導體 Conductor	磷銅 (Phosphor bronze)	C5191
螺絲 Screw	螺絲 Screw	3.5x7x7.6
螺絲 Screw	螺帽 Nut	3.5mm x 6 CHQ302
螺絲 Screw	硬度 Hardness	HV 200-220

其 他 / Other

重量 Weight	39 ± 2g (P3G-08) 40 ± 2g (P3G-08E)
包裝 Packing	20 pcs per case
適用計時器 Applicable Timer	台灣Taiwan → ASY-3D、CSKB、CSKY-B、 G5B、LDC、LS 國外Overseas → E5SC、G3B、H3CA、STP-Y



詳盈電機有限公司 • www.shyangyng.com • +886-02-29897982