
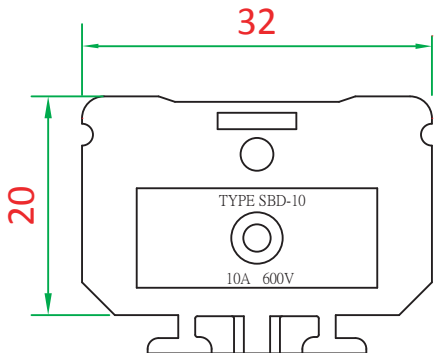
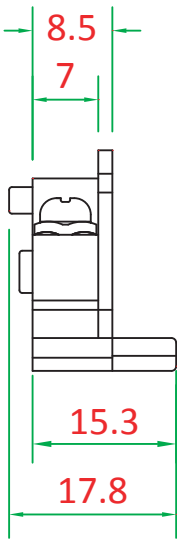
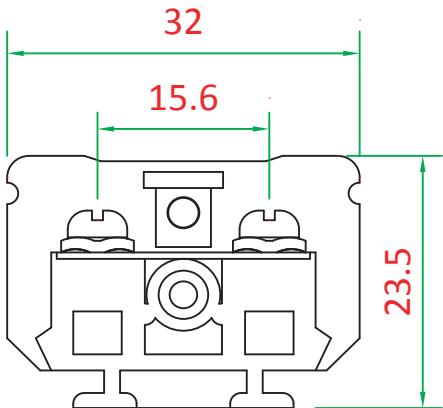
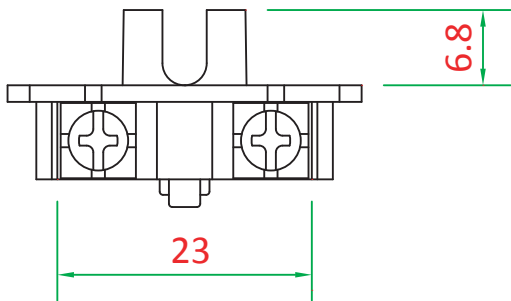



-Terminal Block Series-

S B D — 1 0

春日型卡式軌道式端子台



產品資訊
Products Information



一般特性 / Genneral characteristics

耐壓強度 Dielectric strength	2000V/AC 1Min
絕緣強度 Insulation resistance	DC 500V≥500MΩ
額定負載 Load rating	額定電壓 Voltage rating →600V AC 額定電流 Current rating →10 Amp
熱變形溫度(HDT) Heat Deflection Temperature	100℃ / 212℉
燃燒性 Flammability ratings	UL-94V2

主要材質 / Material

本體 Body	工業塑膠 PC+GF(FRP) (Industrial Plastic)
導體 Conductor	青銅 (bronze)
螺絲 Screw	螺絲 Screw 3 x 7 x 6 . 8 mm 螺帽 Nut 3mm x 5.5 CHQ302 硬度 Hardness HV 200-220

其 他 / Other

重量 Weight	6 ± 1g
包裝 Packing	100 pcs per case
適用端子台 Applicable Terminal block	台灣Taiwan → TBC-10、SBD-10、SLR-10 國外 Overseas → TR-10SK

