

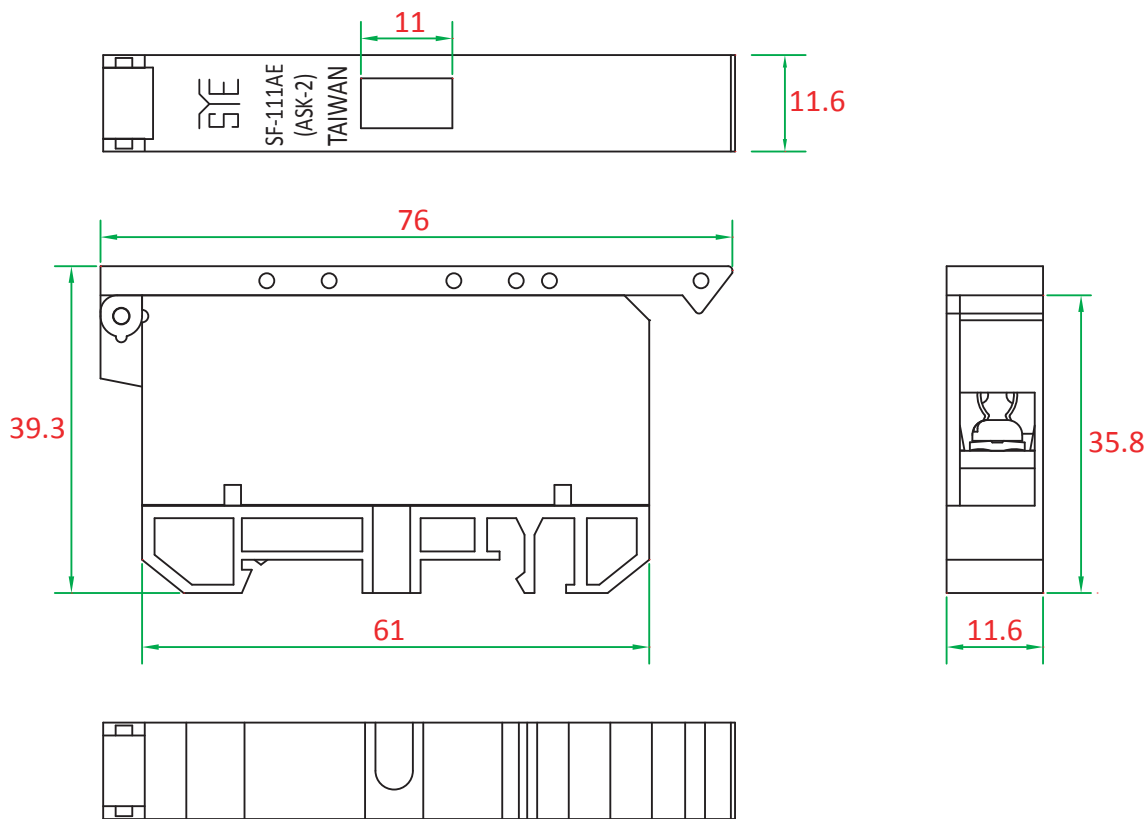


-Relay Socket Series-

S F - 1 1 1 A E 臥式保險絲座

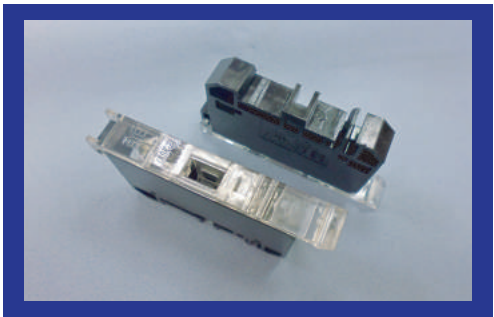

產品資訊
Products Information

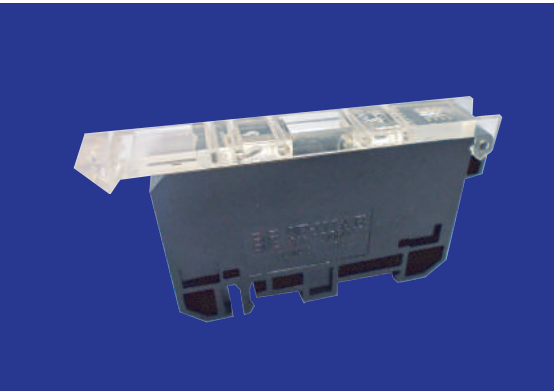

一般特性 / General characteristics

耐壓強度 Dielectric strength	2000V/AC 1Min
絕緣強度 Insulation resistance	DC 500V ≥500MΩ
接點最大負載 Maximum loads rating	額定電壓 Voltage rating →600V AC 額定電流 Current rating →10 Amp
熱變形溫度(HDT) Heat Deflection Temperature	100°C / 212°F
燃燒性 Flammability ratings	UL-94V2

主要材質 / Material

本體 Body	工業塑膠 PC+GF(FRP) (Industrial Plastic)	
導體 Conductor	青銅 (Bronze)	
螺絲 Screw	螺絲 Screw	3.5x7x7.5
	螺帽 Nut	3.5mm x 6 CHQ302
	硬度 Hardness	HV 200-220

其他 / Other

重量 Weight	22 ± 2g
包裝 Packing	100 pcs per case
適用保險絲 Applicable Fuse	台灣Taiwan →30mm 國外Oversea →SF-811、SF-812、TFB-101、TFB-102