


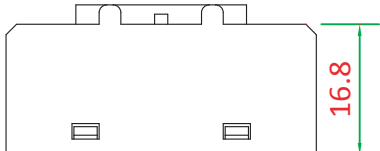
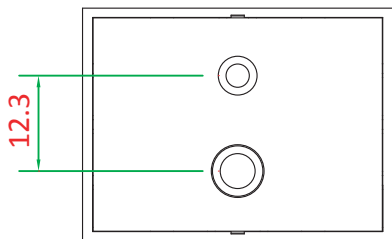
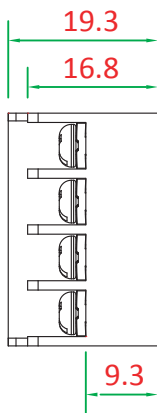
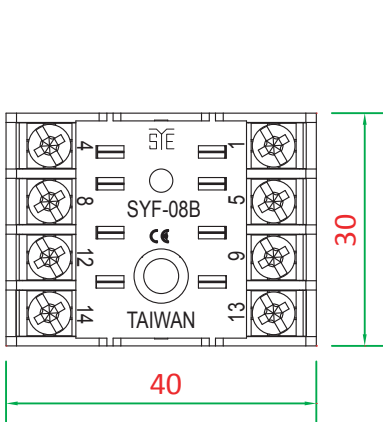

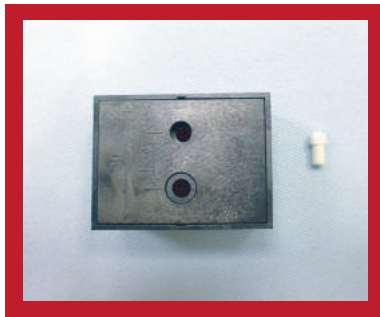


-Relay Socket Series-

SYF - 08 B 繼電器座(露出)

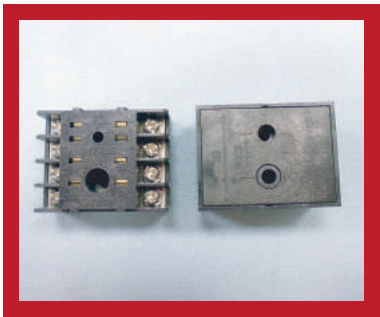

TOP VIEW

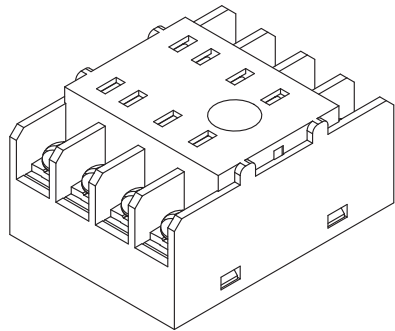

產品資訊
Products Information



一般特性 / General characteristics

耐壓強度 Dielectric strength	2000V/AC 1Min
絕緣強度 Insulation resistance	DC 500V ≥500MΩ
接點最大負載 Maximum loads rating	額定電壓 Voltage rating →250V AC 額定電流 Current rating →5 Amp
熱變形溫度(HDT) Heat Deflection Temperature	100°C / 212°F
燃燒性 Flammability ratings	UL-94V2

主要材質 / Material

本體 Body	工業塑膠 (Industrial Plastic)	PC+GF(FRP)
導體 Conductor	磷銅 (Phosphor bronze)	C5191
螺絲 Screw	螺絲 Screw	3x7x5.8
	螺帽 Nut	3mm x 5.5 CHQ302
	硬度 Hardness	HV 200-220

其他 / Other

重量 Weight	26 ± 2g
包裝 Packing	20 pcs per case
適用繼電器 Applicable Relays	台灣Taiwan →MG-2P、SCL-1 國外Oversea →HC-2、MY-2、RM2S-U、SCLB-P