




-Relay Socket Series-




SYF-14A/AE 繼電器座(露出)



SYF-14A




SYF-14AE

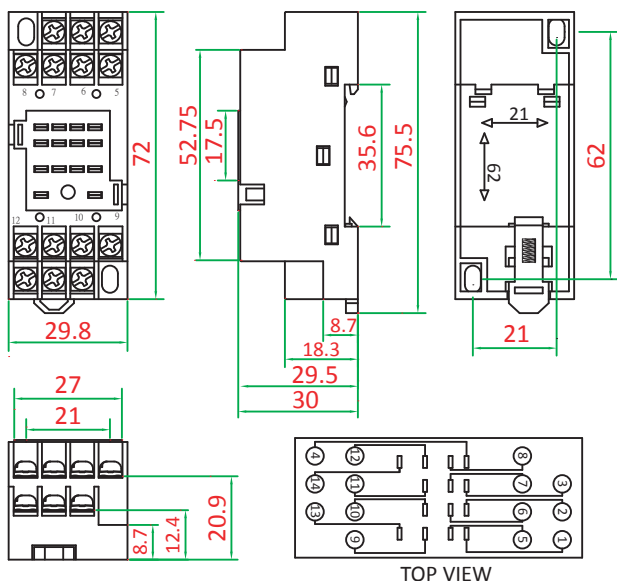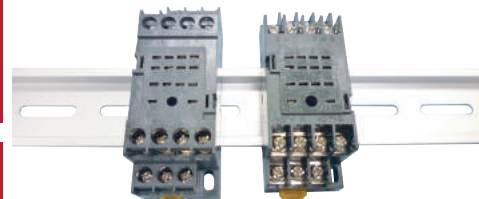

SYF-14A

詳盈電機有限公司

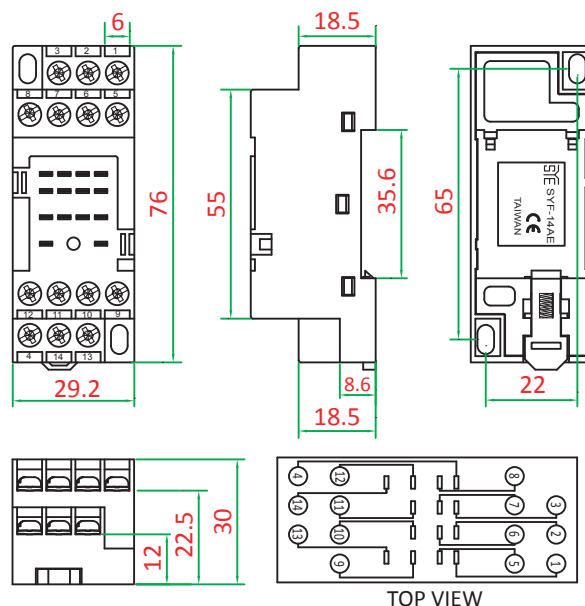

SYF-14AE

詳盈電機有限公司

產品
Products

資訊
Information

一般特性 / General characteristics

耐壓強度 Dielectric strength	2000V/AC 1Min
絕緣強度 Insulation resistance	DC 500V $\geq 500M\Omega$
接點最大負載 Maximum loads rating	額定電壓 Voltage rating →250V AC
	額定電流 Current rating →5 Amp
熱變形溫度(HDT) Heat Deflection Temperature	100°C / 212°F
燃燒性 Flammability ratings	UL-94V2

主要材質 / Material

本體 Body	工業塑膠 (Industrial Plastic)		PC+GF(FRP)
	導體 Conductor		銅 (Copper)
螺絲 Screw	螺絲 Screw		3.5x7x5.8
	螺帽 Nut		3mm x 5.5 CHQ302
	硬度 Hardness		HV 200-220

其他 / Other

重量 Weight	48 $\pm$ 2g (SYF-14A)
	52 $\pm$ 2g (SYF-14AE)
包裝 Packing	20 piece per case
適用繼電器 Applicable Relays	台灣Taiwan → MG-4P、SCLD-P
	國外Oversea → MY4、HC-4、RY4S-U
通過認證	SYF-14A : UL SYF-14AE : UL、CE、FI