



-Relay Socket Series-



PF-083A/AE 繼電器座(露出)



PF-083A



PF-083AE

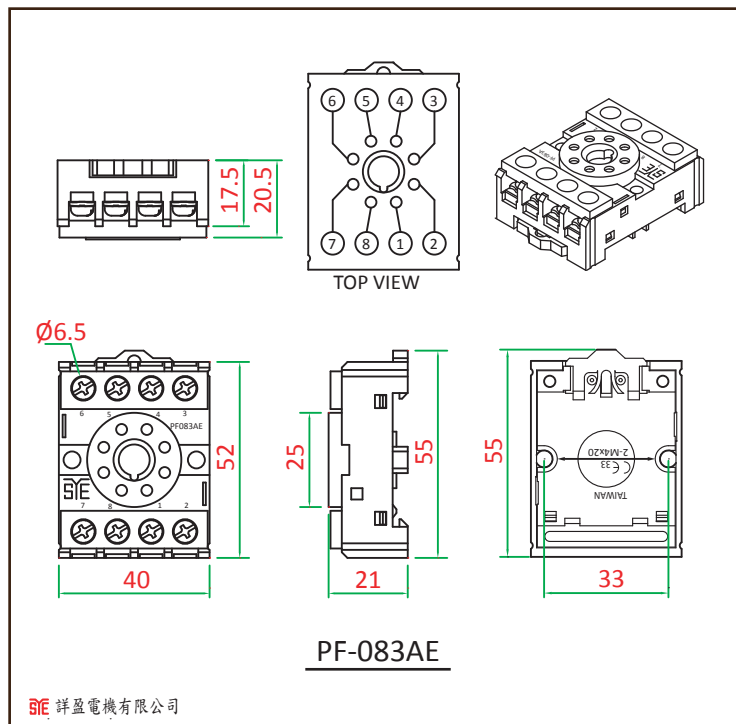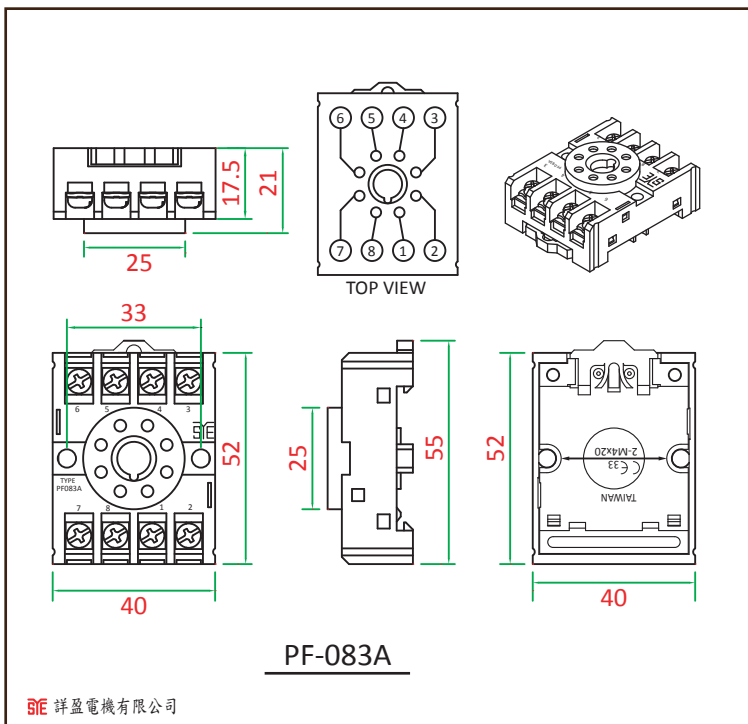

產 品
Products

資 訊
Information



一般特性 / General characteristics

耐壓強度 Dielectric strength	2000V/AC 1Min
絕緣強度 Insulation resistance	DC 500V $\geq 500M\Omega$
接點最大負載 Maximum loads rating	額定電壓 Voltage rating →250V AC 額定電流 Current rating →10 Amp
熱變形溫度(HDT) Heat Deflection Temperature	100°C / 212°F
燃燒性 Flammability ratings	UL-94V2

主要材質 / Material

本體 Body	工業塑膠 (Industrial Plastic)	PC+GF(FRP)
導體 Conductor	銅 (Copper)	C5191
螺絲 Screw	螺絲 Screw	3.5x7x6.7
螺絲 Screw	螺帽 Nut	3.5mm x 6 CHQ302
螺絲 Screw	硬度 Hardness	HV 200-220

其 他 / Other

重量 Weight	38 $\pm$ 2g (PF-083A) 39 $\pm$ 2g (PF-083AE)
包裝 Packing	20 piece per case
適用繼電器 Applicable Relays	台灣Taiwan → CSB-FC、PA/PD210 國外Oversea → MK-2P、RR2P-U、RTH
通過認證	CE、FI(PF-083AE only)

