Occlutech ASD Occluder Ordering information



Article No.	Ø Waist [mm]	Defect Size [mm]	Sheath Size* [F]	Flex Pusher II Article No. (colour**
29ASD04				51FP060 O
29ASD05	5	4 <d≤5< td=""><td></td><td>51FP060 O</td></d≤5<>		51FP060 O
29ASD06	6	5 <d≤6< td=""><td></td><td>51FP100 O</td></d≤6<>		51FP100 O
29ASD07	7.5	6 <d≤7.5< td=""><td></td><td>51FP100 O</td></d≤7.5<>		51FP100 O
29ASD09	9	7.5 <d≤9< td=""><td></td><td>51FP100 O</td></d≤9<>		51FP100 O
29ASD10	10.5	9 <d≤10.5< td=""><td></td><td>51FP100 O</td></d≤10.5<>		51FP100 O
29ASD12		10.5 <d≤12< td=""><td>9</td><td>51FP120 O</td></d≤12<>	9	51FP120 O
29ASD13	13.5	12 <d≤13.5< td=""><td>9</td><td>51FP120 O</td></d≤13.5<>	9	51FP120 O
29ASD15		12 <d≤15< td=""><td>9</td><td>51FP120 O</td></d≤15<>	9	51FP120 O
29ASD16	16.5	15 <d≤16.5< td=""><td>9</td><td>51FP120 O</td></d≤16.5<>	9	51FP120 O
29ASD18	18	15 <d≤18< td=""><td>9</td><td>51FP120 O</td></d≤18<>	9	51FP120 O
29ASD19	19.5	16.5 <d≤19.5< td=""><td>10</td><td>51FP120 🔾</td></d≤19.5<>	10	51FP120 🔾
29ASD21		18 <d≤21< td=""><td></td><td>51FP150 O</td></d≤21<>		51FP150 O
29ASD24	24	21 <d≤24< td=""><td>11</td><td>51FP150 O</td></d≤24<>	11	51FP150 O
29ASD27		24 <d≤27< td=""><td>12</td><td>51FP160 O</td></d≤27<>	12	51FP160 O
29ASD30	30	27 <d≤30< td=""><td>12</td><td>51FP160 O</td></d≤30<>	12	51FP160 O
29ASD33	33	30 <d≤33< td=""><td></td><td>51FP160 O</td></d≤33<>		51FP160 O
29ASD36	36	33 <d≤36< td=""><td>12</td><td>51FP160 O</td></d≤36<>	12	51FP160 O
29ASD39	39	36 <d≤39< td=""><td></td><td>51FP160 O</td></d≤39<>		51FP160 O
29ASD40	40/	39 <d≤40< td=""><td>12</td><td>51FP160 O</td></d≤40<>	12	51FP160 O

Quality made in europe

patients and the medical community is the main driver of our vision. We want to be in the forefront of developing technologies and products that matter, that make a difference and that will help our customers to

Occlutech, La Cours Gata 2, SE-252 31 Helsingborg, Sweden Tel +46 (0)42 33 65 32, Fax +46 (0)42 311 09 70 order@occlutech.com, www.occlutech.com



Perfecting Performance



Occlutech ASD Occluder





Designed for excellence and safety



The design of the Flex II ASD Occluder results in an ideal septum alignment which increases its feasibility as well as patient safety during implantation¹

- Optimized braiding pattern and less material at left atrial disc.
- Titanium oxide coverered Nitinol shows the best values of biocompatibility² and minimum Nickel release.³
- Spunbonded PET-patch allows for fast endothelialization.
- The unique ball-connection between pusher and Occluder safely locks it, while it freely follows the anatomy. Once in place it is easy and fast to deliver.

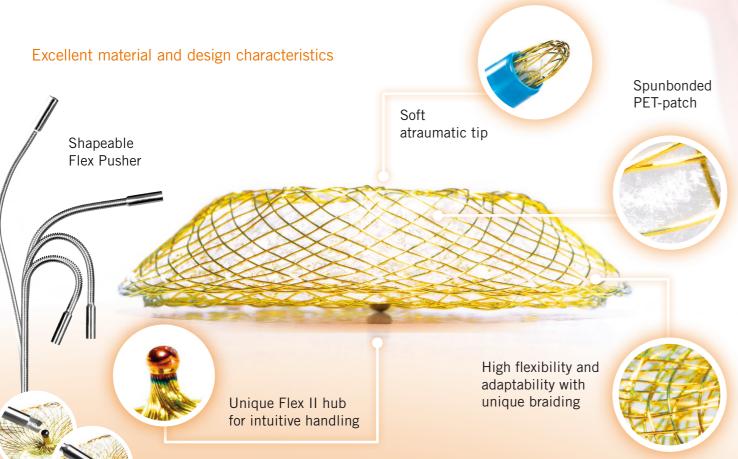


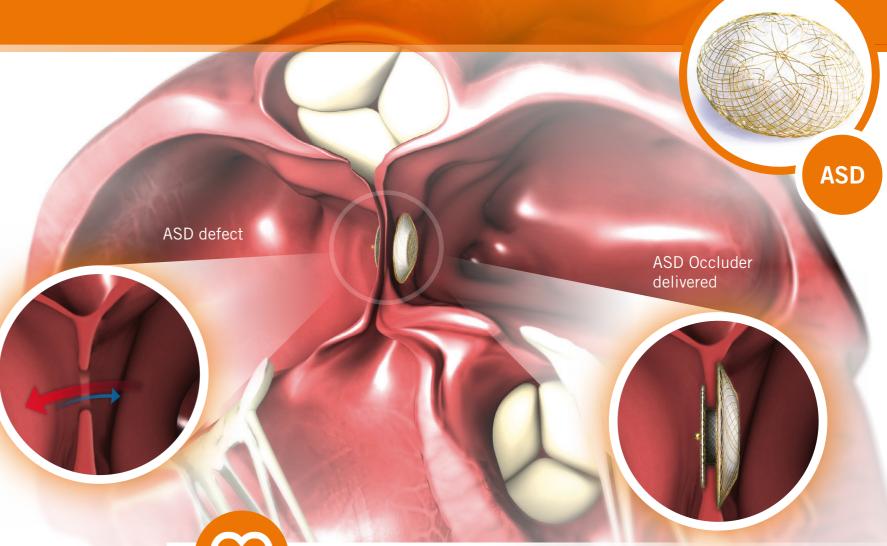




CLINICAL BENEFITS Recent studies found that transcatheter closure of isolated secundum atrial septal defects using the novel design of the Occlutech ASD Occluder was safe, effective and had an excellent outcome during the 6 months follow-up period^{4,5}

- Lower pull in forces and improved delivery sheath compatibility.
- Reduced material exposure.
- Significant reduced mean procedure and fluoroscopic time compared to other devices (34%).⁶



3D TEE image of an implanted Occlutech ASD Occluder.



Perfect alignment of the Occluder to the



50° angulation of Flex Pusher vs Occluder hub.

