



ISO "B" STRAIGHT LINK PLATE CHAIN

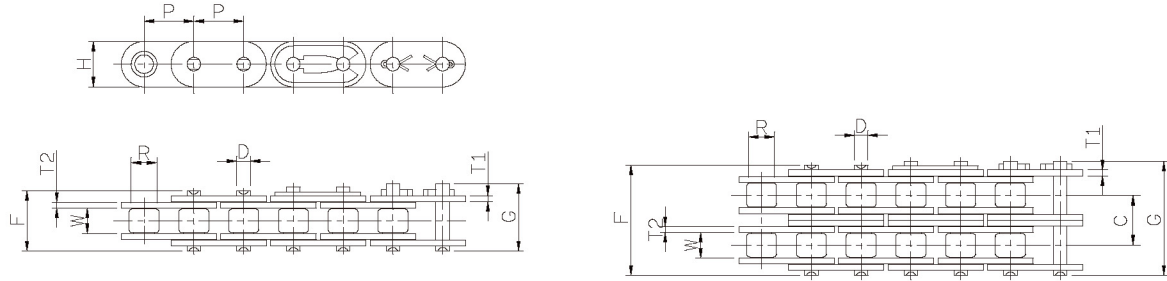

CHAIN NO.	Pitch		Width	Roller	Plate			Pin			Transverse	Ultimate	Approx
	P		W	Dia	Height	Thickness		Dia	Length		Pitch	Strength	Weight
	inch	mm	(min)	R(max)	H(max)	T1	T2	D(max)	F(max)	G(max)	C	kgf(min)	kg/m
06B	0.375"	9.525	5.72	6.35	8.26	1.00	1.30	3.28	13.5	16.8	—	908	0.39
06B-2	0.375"	9.525	5.72	6.35	8.26	1.00	1.30	3.28	23.8	27.1	10.24	1724	0.74
08BF	0.5"	12.70	7.75	8.51	11.81	1.50	1.50	4.45	17.0	20.9	—	1816	0.75
08BF-2	0.5"	12.70	7.75	8.51	11.81	1.50	1.50	4.45	31.0	34.9	13.92	3173	1.50
10BF	0.625"	15.875	9.65	10.16	15.10	1.50	1.50	5.08	19.6	23.7	—	2265	1.00
10BF-2	0.625"	15.875	9.65	10.16	15.10	1.50	1.50	5.08	36.2	40.3	16.59	4541	1.85
12BF	0.75"	19.05	11.68	12.07	16.13	1.70	1.80	5.72	22.7	27.3	—	2949	1.29
12BF-2	0.75"	19.05	11.68	12.07	16.13	1.70	1.80	5.72	42.2	46.8	19.46	5898	2.38
16BGL(24)	1"	25.40	17.02	15.88	24.13	3.20	4.00	8.28	36.1	41.5	—	6122	3.30
16BGL(24)-2	1"	25.40	17.02	15.88	24.13	3.20	4.00	8.28	68.0	73.4	31.88	10816	6.55
16BF	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	36.1	41.5	—	6122	2.70
16BF-2	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	68.0	73.4	31.88	10816	5.35
20BF	1.25"	31.75	19.56	19.05	26.42	3.50	4.50	10.19	43.2	49.3	—	9694	4.25
20BF-2	1.25"	31.75	19.56	19.05	26.42	3.50	4.50	10.19	79.7	85.8	36.45	17347	8.45
24BF	1.5"	38.10	25.40	25.40	33.40	5.20	6.00	14.63	53.4	60.0	—	16327	8.20
24BF-2	1.5"	38.10	25.40	25.40	33.40	5.20	6.00	14.63	101.8	108.4	48.36	28571	16.0
32BF	2"	50.80	30.99	29.21	42.20	6.00	7.00	17.81	65.2	71.0	—	25510	10.68

ISO "B" HEAVY DUTY CHAIN

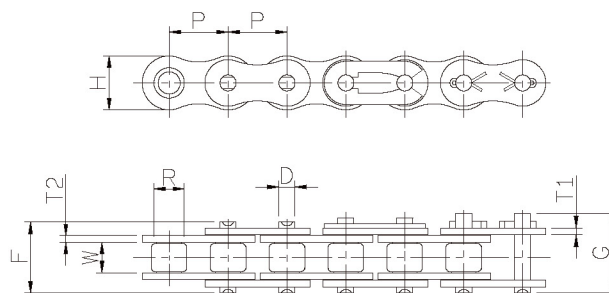

CHAIN NO.	Pitch		Width	Roller	Plate			Pin			Ultimate	Approx
	P		W	Dia	Height	Thickness		Dia	Length		Strength	Weight
	inch	mm	(min)	R(max)	H(max)	T1	T2	D(max)	F(max)	G(max)	kgf(ave.)	kg/m
06BH	0.375"	9.525	5.72	6.35	8.26	1.30	1.50	3.28	15.1	18.4	1250	0.45
08BH	0.5"	12.70	7.75	8.51	12.20	2.00	2.00	4.45	19.2	23.2	2400	0.85
10BH	0.625"	15.875	9.65	10.16	14.73	2.00	2.00	5.08	20.6	24.7	3100	1.01
12BH	0.75"	19.05	11.68	12.07	16.13	2.40	2.40	6.12	25.1	29.7	4500	1.42
16BH	1"	25.40	17.02	15.88	24.00	3.10	4.10	9.00	36.1	38.8	9500	3.22