


CHAIN NO.	Pitch		Width	Bush	Plate			Pin			Ultimate Strength kgf(ave.)	Approx Weight kg/m
	P		W	Dia	Height	Thickness		Dia	Length			
	inch	mm	(min)	R(max)	H(max)	T1	T2	D(max)	F(max)	G(max)		
C2040SL	1"	25.40	7.85	7.92	12.0	1.50	1.50	3.98	17.8	21.7	1300	0.50
C2050SL	1-1/4"	31.75	9.40	10.16	15.0	2.00	2.00	5.09	21.8	25.9	2000	0.79
C2060SL	1-1/2"	38.10	12.57	11.91	18.0	2.40	2.40	5.96	26.9	31.5	2800	1.08
C2080SL	2"	50.80	15.75	15.88	24.1	3.20	3.20	7.94	33.5	38.9	5800	1.94

SL chain standard is rollerless, R indicates bushing diameter. Bushing is solid type.

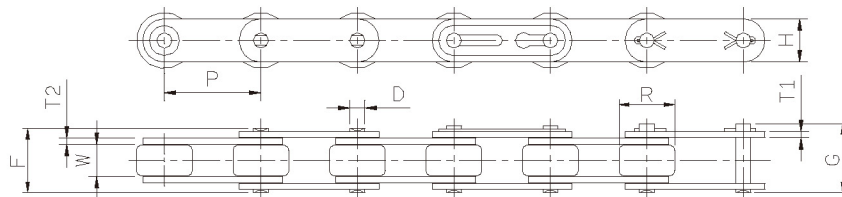

CHAIN NO.	Pitch		Width	Roller	Plate			Pin			Ultimate Strength kgf(ave.)	Approx Weight kg/m
	P		W	Dia	Height	Thickness		Dia	Length			
	inch	mm	(min)	R(max)	H(max)	T1	T2	D(max)	F(max)	G(max)		
C2042SL	1"	25.40	7.85	15.88	12.0	1.50	1.50	3.98	17.8	21.7	1300	0.85
C2052SL	1-1/4"	31.75	9.40	19.05	15.0	2.00	2.00	5.09	21.8	25.9	2000	1.26
C2062SL	1-1/2"	38.10	12.57	22.23	18.0	2.40	2.40	5.96	26.9	31.5	2800	1.77
C2082SL	2"	50.80	15.75	28.58	24.1	3.20	3.20	7.94	33.5	38.9	5800	3.02