



ISO "B" ROLLER CHAIN ATTACHMENTS


SA1

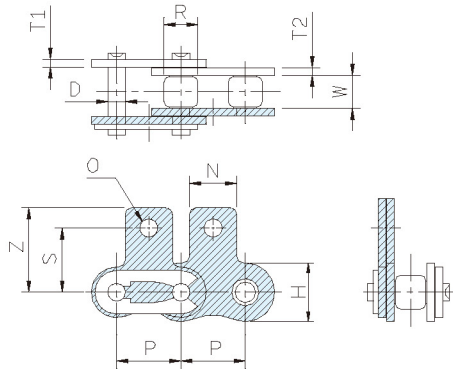


SK1

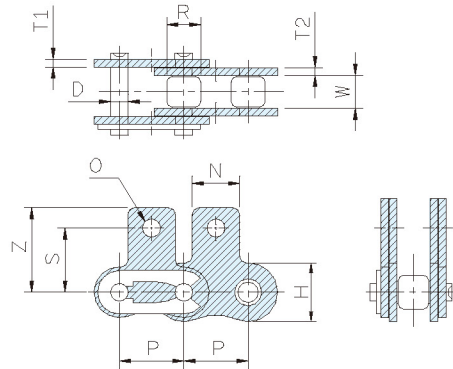

A1

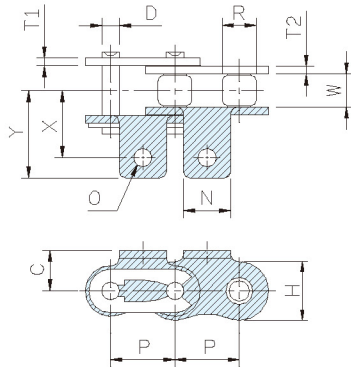

K1

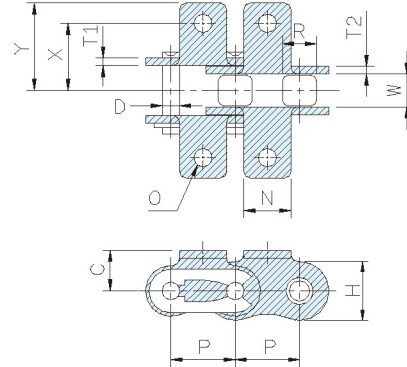


CHAIN NO.	Pitch		Width	Roller	Plate			Pin		Attachment							Allowable
	P		W	Dia	Height	Thick.		Dia		SA-1 SK-1	A-1 K-1	A-1,K-1			SA-1,SK-1		Load
	inch	mm	(min)	R(max)	H(max)	T1	T2	D(max)	N	O(min)		C	X	Y	S	Z	kgf(max)
08BSS	0.5"	12.70	7.75	8.51	11.81	1.50	1.50	4.45	11.00	4.30		—	—	—	13.70	20.80	50
D08BSS	0.5"	12.70	7.75	8.51	11.81	1.50	1.50	4.45	11.00	4.30		—	—	—	13.00	20.80	50
K08BSS	0.5"	12.70	7.75	8.51	11.81	1.50	1.50	4.45	11.00	4.30		8.90	13.80	20.85	—	—	50
10BSS	0.625"	15.875	9.65	10.16	14.73	1.50	1.50	5.08	14.00	5.30		10.30	15.90	24.80	16.50	24.90	66
12BSS	0.75"	19.05	11.68	12.07	16.13	1.70	1.80	5.72	18.00	6.60		12.20	17.60	26.35	18.50	28.20	90
D12BSS	0.75"	19.05	11.68	12.07	16.13	1.70	1.80	5.72	18.00	6.40	6.60	—	—	—	21.00	28.20	90
16BSS	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	24.00	8.40		17.00	29.00	41.90	27.40	39.70	209
D16BSS	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	24.00	6.60		—	—	—	23.00	39.70	209
K16BSS	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	24.00	8.40		17.00	29.00	42.80	—	—	209

Any special specifications, please feel free to contact us.


Note : AISI 304 chain is with slightly magnetic due to cold forming of parts.

ISO "B" ROLLER CHAIN ATTACHMENTS


WSA1

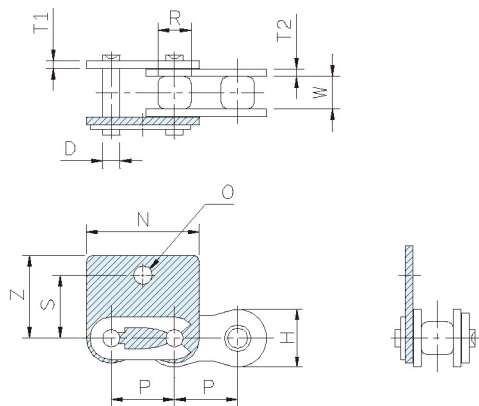


WSK1

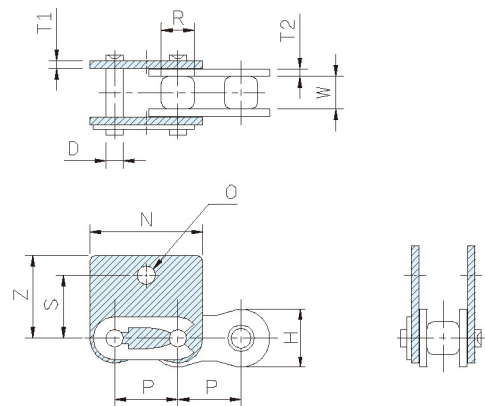

WA1

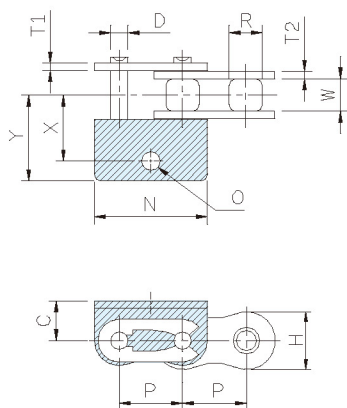

WK1

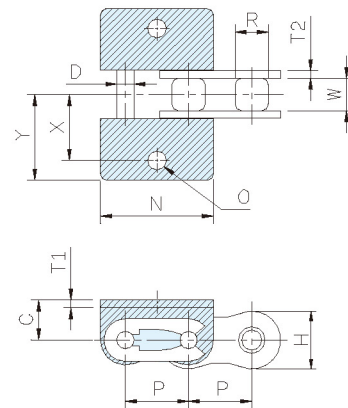

CHAIN NO.	Pitch		Width	Roller	Plate			Pin	Attachment							Allowable
	P		W	Dia	Height	Thick.		Dia	WA-1,WK-1							Load kgf(max)
	inch	mm	(min)	R(max)	H(max)	T1	T2	D(max)	N	O	C	X	Y	S	Z	
08BSS	0.5"	12.70	7.75	8.51	11.81	1.50	1.50	4.45	22.90	4.30	—	—	—	13.70	20.80	50
K08BSS	0.5"	12.70	7.75	8.51	11.81	1.50	1.50	4.45	22.90	4.30	8.90	13.80	20.85	—	—	50
10BSS	0.625"	15.875	9.65	10.16	14.73	1.50	1.50	5.08	28.95	5.30	10.30	15.90	24.80	16.50	24.90	66
12BSS	0.75"	19.05	11.68	12.07	16.13	1.70	1.80	5.72	36.00	6.60	12.20	17.60	26.35	18.50	28.20	90
16BSS	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	45.70	8.40	17.00	29.00	41.90	27.40	39.70	209
D16BSS	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	45.70	6.60	—	—	—	23.00	39.70	209
K16BSS	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	45.70	8.40	17.90	29.00	42.80	—	—	209

Any special specifications, please feel free to contact us.

Note: AISI 304 chain is with slightly magnetic due to cold forming of parts.