
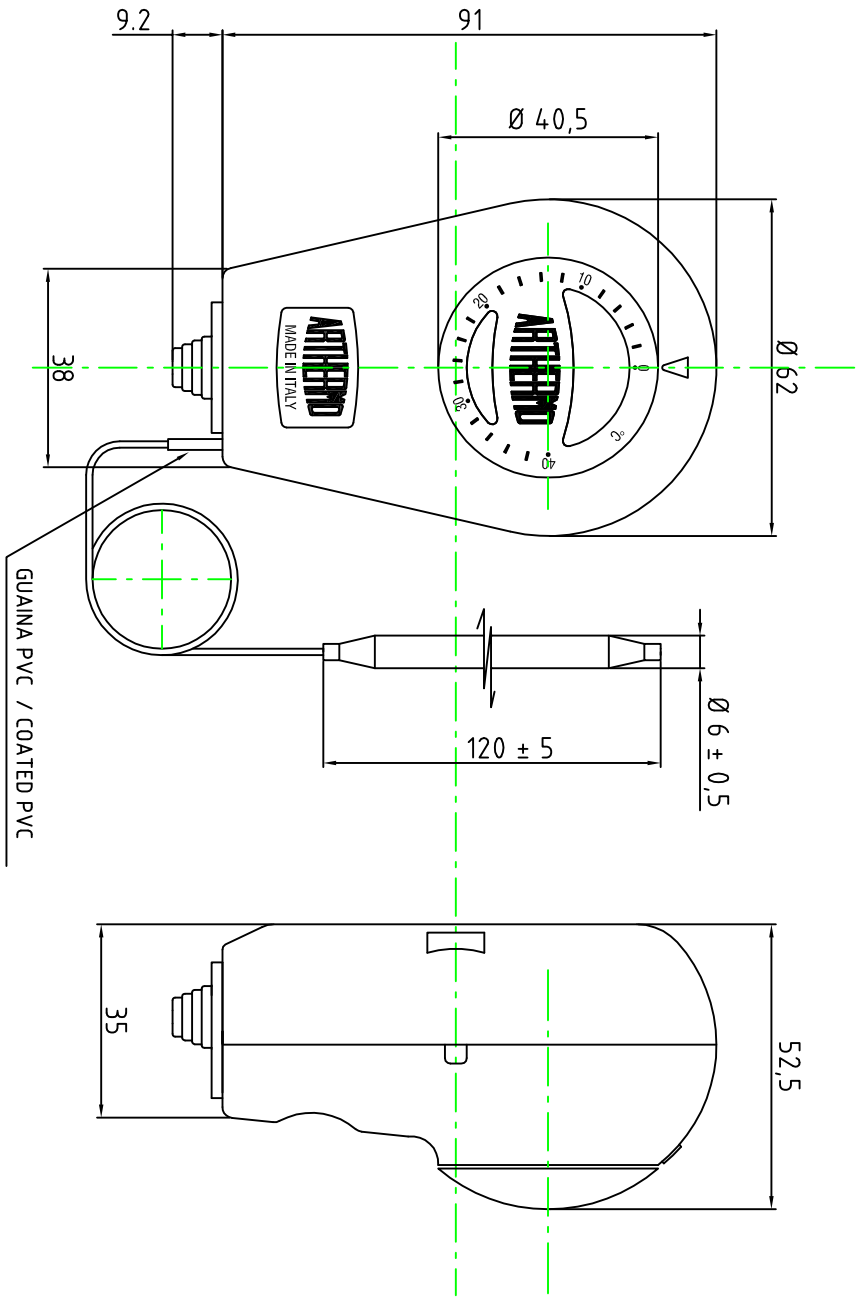


DATI TECNICI - THECNICAL DATA			
SCALA RANGE:	0 / 40°C		
DIFFERENZIALE / DIFFERENTIAL :	4 ± 2°C		
TOLL.VALORI F.S.	± 3°C		
CAPILLARE / CAPILLARY :	MM 1500 ACCIAIO INOX / INOX STEEL		
INVOLUCRO MANOPOLA / CASE:	LIGHT BLUE PANTONE 2995C		
SERIGRAFIA / DIAL :	RED KNOB - WHITE NUMBERS		
PORTATA CONTATTI / BREAKING CAPACITY :	C1 15(2,5)A 400 VAC C2 2,5(0,4)A 400VAC		
MINIMUM CORRENT.:	200 mA		
INSULATION RESISTANCE :	> 100 M ohm		
TEST DI VITA / LIFE OF PRODUCT :	100.000 CICLI / CYCLES		
MAX °C SOPP. CORPO / MAX °C CASE	80°C		
GRADO TENUTA / IP GRADE :	IP 40		



ETICHETTA INDELEBILE PER RIFERIMENTO UNICO

MODIFICA		DOC.RIF.	DATA	APPARECCHIO	
1				ASSIEME	ARTH096
2				PARTICOLARE	ARTH096
3				MATERIALE	
4				TRATTAMENTO	
5				NOTE	
				DISEGNATO A. SALA	APPROVATO SALA A.
				SCALA 1 : 1	DATA 11/11/2011
				CODICE	ARTH096