

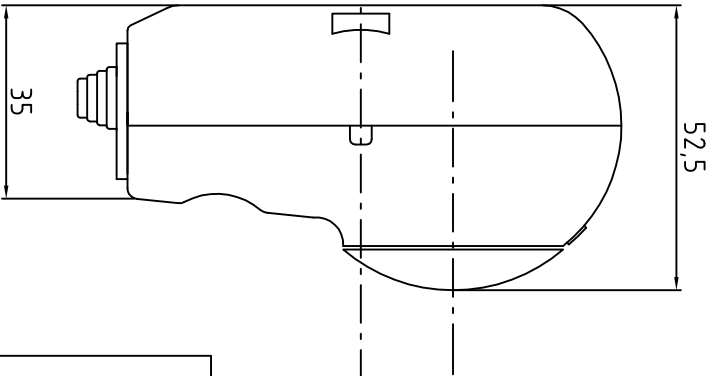


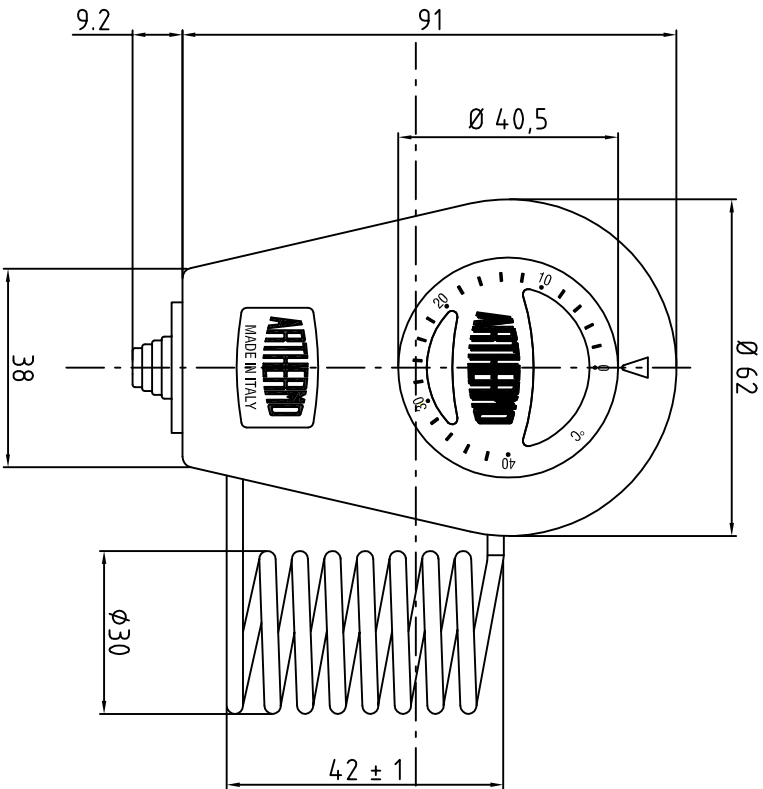

SCHEMA ELETTRICO / ELECTRIC DIAGRAM
S.P.D.T.



DATI TECNICI - THECNICAL DATA

SCALA RANGE:	0/40°C
DIFFERENZIALE / DIFFERENTIAL :	2 ± 1,5°C
TOLL.VALORI F.S.	± 3°C
CAPILLARE / CAPILLARY :	SPIRALE ACCIAIO INOX / SPIRALED STAINLESS STEEL
INVOLUCRO MANOPOLA / CASE:	LIGHT BLUE PANTONE 2995C
SERIGRAFIA / DIAL :	RED KNOB - WHITE NUMBERS
PORTATA CONTATTI / BREAKING CAPACITY :	C2 2,5(0,4) A 400VAC / C1 15(2,5) A 400VAC
MINIMUM CORRENT.:	200 mA
INSULATION RESISTANCE :	> 100 M ohm
TEST DI VITA / LIFE OF PRODUCT :	100.000 CICLI / CYCLES
MAX °C SOPP. CORPO / MAX °C CASE	70°C
GRADO TENUTA / IP GRADE :	IP 4.0

MODIFICA		DOC.RIF.	DATA	APPARECCHIO	
				ASSEMBLARE	
1				ARTH093	
2				MATERIALE	
3				TRATTAMENTO	
4				SCALA	1 : 1
5				NOTE	
				DISIGNATO	APPROVATO
				A. SALA	SALA A.
				11/11/2011	
				CODICE	ARTH090