

Pressure sensors for general application

with internal diaphragm
for gauge pressure and absolute pressure

Accuracy 0.25% and 0.5%

Standard output: 4 ... 20 mA; 2-wire
or 0 ... 5 VDC; 3-wire
or 0 ... 10 VDC; 3-wire



Description

Pressure sensors for general application are top of the range pressure transducers.

Their accuracy, reliability, resistance to corrosion and mechanical load make them suitable for all pressure measuring tasks - in production, development or in the laboratory.

The measuring ranges, graded in accordance with EN, range from 25 mbar to the maximum pressure range of 1000 bar. The case and wetted parts comprise stainless steel and are thus resistant to chemically aggressive media. The pressure connection and measuring element are welded together, making the measuring system particularly resistant to mechanical shock or vibration.

For more difficult measuring tasks (e.g. hydrostatic column), two potentiometers enable the zero point and measuring range to be set.

The pressure sensors for general application meet the electronic magnetic compatibility (EMC) requirements to EN 61 326.

Features

- o Measuring ranges from 25 mbar to 1000 bar
- o Finely graded selection of nominal ranges according to EN
- o Corrosion resistant, stainless steel design
- o High overload protection
- o Highly resistant to shock and vibration
- o For dynamic or static measurements
- o Good reproducibility
- o Simple installation

Measuring Ranges

Gauge pressure

Negative -1 ... 0 bar to -0.025 ... 0 bar

Positive 0 ... 0.025 bar to 0 ... 1000 bar

Absolute pressure 0 ... 0.25 bar to 0 ... 16 bar

Applications

Development and laboratory, process engineering, plant and apparatus construction, hydraulics and pneumatics

Models: P3276

Technical data

Model	P3276						Option
Pressure type	negative or positive gauge pressure				absolute pressure		negative or positive gauge pressure
Output signal	4 ... 20 mA - 2-wire 0 ... 5 VDC - 3-wire 0 ... 10 VDC - 3-wire						other signals on request
Accuracy % of F. S. ¹⁾	0.5 <i>0.25% BFSL</i>	0.25 <i>0.13% BFSL</i>	0.5 <i>0.25% BFSL</i>	0.25 <i>0.13% BFSL</i>	0.5 <i>0.25% BFSL</i>	0.25 <i>0.13% BFSL</i>	
Ranges accord. to EN	0 ... 0.1 bar ²⁾ to 0 ... 25 bar		0 ... 40 bar to 0 ... 1000 bar		0 ... 25 bar to 0 ... 16 bar		0 ... 25 mbar ³⁾ 0 ... 40 mbar 0 ... 60 mbar
Sensor element	piezoresistive		Thin film		piezoresistive		
Non-linearity	≤ ± 0.2% of F. S.						
Non-repeatability	≤ ± 0.1% of F. S.						
Stability (annual)	≤ ± 0.2% of F. S. in reference conditions						
Case	Stainless steel						
Pressure connection ⁴⁾	G 1/2 B to EN837						G 1/4 B; 1/4 NPT; 1/2 NPT
Wetted parts	Stainless steel						
Overload limit	≤ 16 bar 3.5 x; ≤ 600 bar 2 x; > 600 bar 1.5 x;						
Electrical connection	plug according to DIN EN 175301-803 form A with junction box round connector M12x1; 4-pin						cable outlet with 1 m cable
Power supply	10 ... 30 VDC (14 ... 30 VDC for output 0 ... 10 V)						
Power consumption	current output 4 ... 20 mA: signal currency voltage output: 8 mA						
for output (0) 4 ... 20 mA Load	$\leq \frac{UB - 10V}{0,020A}$ for output 4...20 mA two wire > 5 kOhm for output 0 ... 5 V > 10 kOhm for output 0 ... 10 V						
Temp. compens. range	0 ... 80 °C						
Temperature influence - Zero point - Measuring range	± 0.2% / 10 K ⁵⁾ ± 0.2% / 10 K						
Adjustability	zero point and full scale up to ± 5%						IP 67 / IP68 for cable outlet
Response time	≤ 1 ms (within 10% to 90% of F. S.)						
Protection type	IP 65 to EN 60 529 / IEC 529 IP 67 to M12x1 connector						
CE-conformity ⁶⁾ -pressure equipment Directive EMC directive	97/23/EC 2004/108/EEC, EN 61326 Emission (Group 1, Class B) and immunity (industrial location)						
Electrical protection types	polarity, overload and short-circuit protection						
Insulation voltage ⁷⁾	500 VDC						
Temperature ranges - Storage - Medium - Ambient	-40 ... 100 °C -30 ... 100 °C -20 ... 80 °C						media temperature -40 ... 125 °C
Weight	approx. 0.2 kg						

of F.S. = full scale value

¹⁾ Including non linearity, hysteresis, zero point and full scale error (corresponds to error of measurement per IEC 61298-2)

²⁾ 0.25% accuracy for ranges ≥ 0.25 bar

³⁾ For ranges < 0.1 bar: model P3275; technical data as model P3276;
wetted parts 1.4571, Si, Al and Au; only applicable for dry and non aggressive gases

⁴⁾ 0 ... 2500 bar M16 x 1.5 female

⁵⁾ ≤ ± 0.4 %/10 K for measuring ranges 0 ... 0.1 and 0 ... 0.16 bar

⁶⁾ Declaration of conformity on request


⁷⁾ NEC Class 02 power supply (low voltage and low current max. 100 VA even under fault conditions)

Dimensions


Case

plug according to DIN EN 175301-803 form A with junction box


Accuracy 0.5%

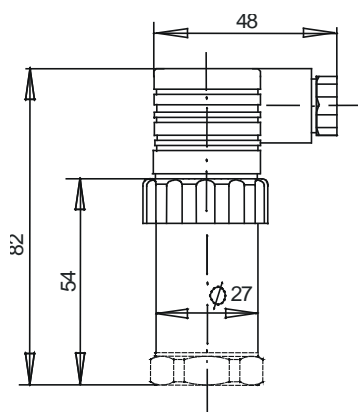

Accuracy 0.25%

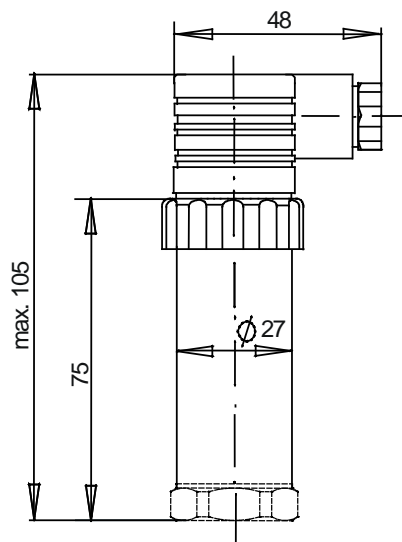


cable outlet




Pressure connections


G 1/2 B



G 1/4 B




High pressure connection
M16x1.5 female




Screw-in aperture according to DIN 16 288


G 1/2



G 1/4




High pressure connection
M16x1.5 female



Electrical connection


Two-wire system

plug according to DIN EN 175301-803
form A with junction box




E-001

MIL-plug




E-011

cable outlet



E-015


M12x1



E-003


Three-wire system

plug according to DIN EN 175301-803
form A with junction box




E-002

MIL-plug




E-012

cable outlet



E-017

M12x1



E-034

Connection table for DIN plug or cable outlet

	4 ... 20 mA (2-wire)		0 ... 10 VDC (3-wire)	
Supply: UB+	1	brown	1	brown
Supply: 0V	2	green	2	green
Signal: S+	---	-----	3	white
Signal:	---	-----	2	green

Order details

1. Model
2. Measuring range
3. Output signal
4. Options

Modifications reserved