

MANUALLY VALVES 手動閥


DGH SERIES DGH系列

◆ MODEL 型 式

DGH-3D2-03T



◆ CONTROL PORT(S) 動作形式



◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Maximum Flow 最大流量 lpm	Weight 重量 Kg
DGH-3D2-03T	70 (1015psi)	40 (10.6gpm)	2.9 (6.39 lbs)
Fluid Type 液體型式	ISO VG 32, 46, 68		
Viscosity 黏性 cSt	10~400 (59~1854 SSU)		
Operating Temperature 操作溫度 °C	-15~70 (-5~158°F)		
Contamination Level 污染標準	$\beta_{0.5} \geq 75$, Under NAS Class 12, 25 μ		

◆ HOW TO ORDER 編號說明

1		2		3		4
DGH	—	3D2	—	03		T


1 VALVE SERIES 系列名稱
DGH=PRESSURE REDUCING VALVES
減壓閥

3 SUBPLATE MOUNTING SIZE: 副板口徑
Size: 03

2 DESIGN NO 設計編號


4 CONNECTING TYPE 連接型式
T:TYPE:THREADING TYPE (螺紋連接)

◆ DIMENSIONS 外觀尺寸圖




◆ MODEL 型 式

DMB-03

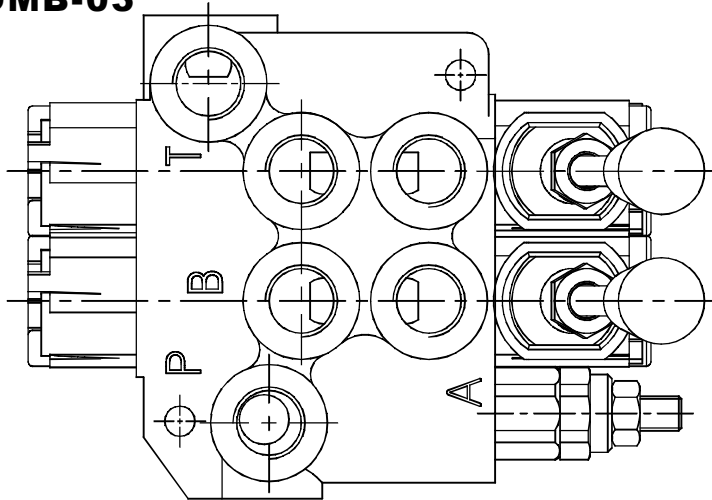

◆ CONTROL PORT(S) 動作形式

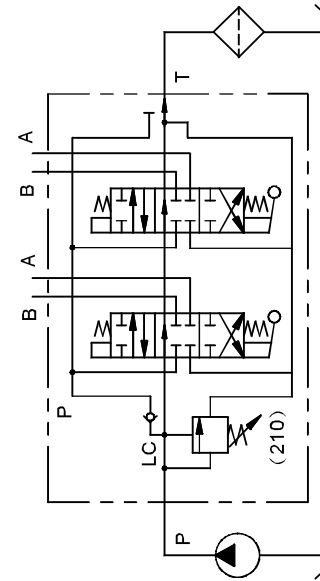

◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Maximum Flow 最大流量 lpm	Weight 重量 Kg
DMB-03-**-**	320(4641 psi)	35(9.3 gpm)	*
Fluid Type 流體型式	ISO VG 32 , 46 , 68		
Viscosity 黏性 cSt	10~400 (59~1854 SSU)		
Operating Temperature 操作溫度 °C	-15~70 (-5~158°F)		
Contamination Level 污染標準	ISO4406. 21/19/16 NAS1638,10		

- Pressure regulation valve, set Max. pressure 210 bar when finish goods.
出廠壓力調節閥標準設定最大壓力210bar

※Need to establish the pressure when 320bar, please tell in advance
※The relief valves please refer to the VRV-02 series
※如需設定壓力為320bar需先告知 ※調壓閥請參考VRV-02系列

◆ HOW TO ORDER 編號說明

1	2	3	4	5	6	7	8	9
DMB	03	C	2	1N	F*	B*	I*	U*

- 1 VALVE SERIES 系列名稱**
DMB = Stack Valve 多路閥

- 2 SUBPLATE MOUNTING SIZE 稱呼口徑**
03 = G3/8"

- 3 MODEL 型式**
C: SPRING TYPE 彈簧式
D: Steel Ball Positioning 鋼珠定位

- 4 SPOOL TYPES 滑柱型式**
See Page 037
見面頁037

- 5 NUMBER OF VALVE BLOCKS 連數**
1N~7N = 1~7 BLOCKS

- 6 CONTROL PORT 控制端(前蓋)**
F* : Control Type 控制型式
See Page 042-043
見頁面042-043
None : Standard Type 無標準型式

- 7 POSITIONING PORT 定位端(後蓋)**
B* : Positioning Type 定位型式
See Page 044-045
見頁面044-045
None : Standard Type 無標準型式

- 8 INLET SECTION 入油測**
See Page 038
見面頁038

- 9 OUTLET SECTION 出油測**
See Page 039
見面頁039

※The product needs the counter assembly please first to inform the factory, the counter assembly code number is "L"
※產品需逆組裝請先告知工廠，逆組裝代號為"L"。


STACK VALVE

DMB SERIES 多路閥系列

◆ DIMENSIONS 外型尺寸圖

● CARRY-OVER PLUG (on T1 Port)




轉接插頭 (接口在T1)



T1	T3	Purchasing No 訂貨編號
G 3/8"	G 3/8"	COG38

※ Extra attachment
※ 特別附件

Carry-over
第二個連接系統之連接口

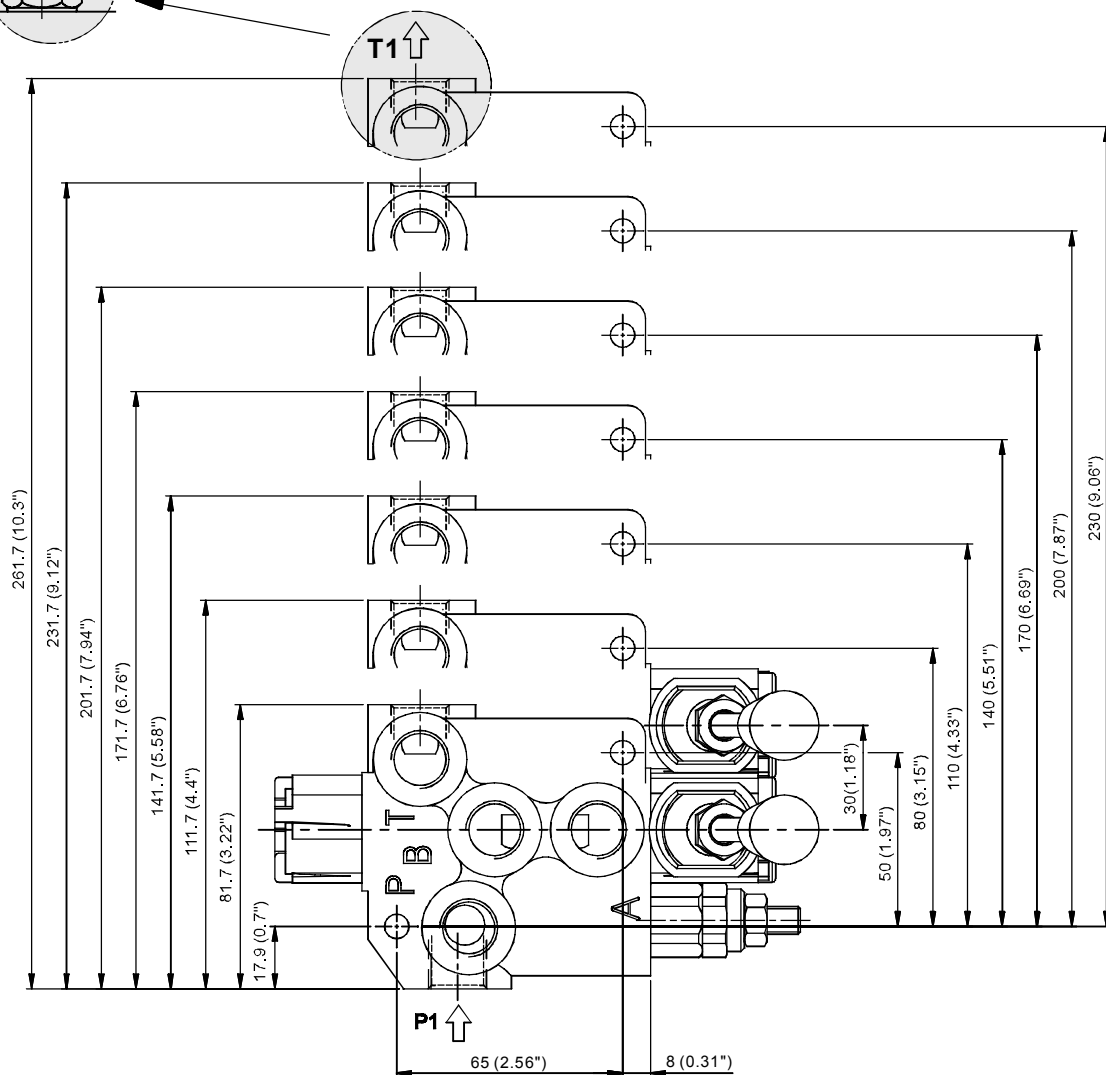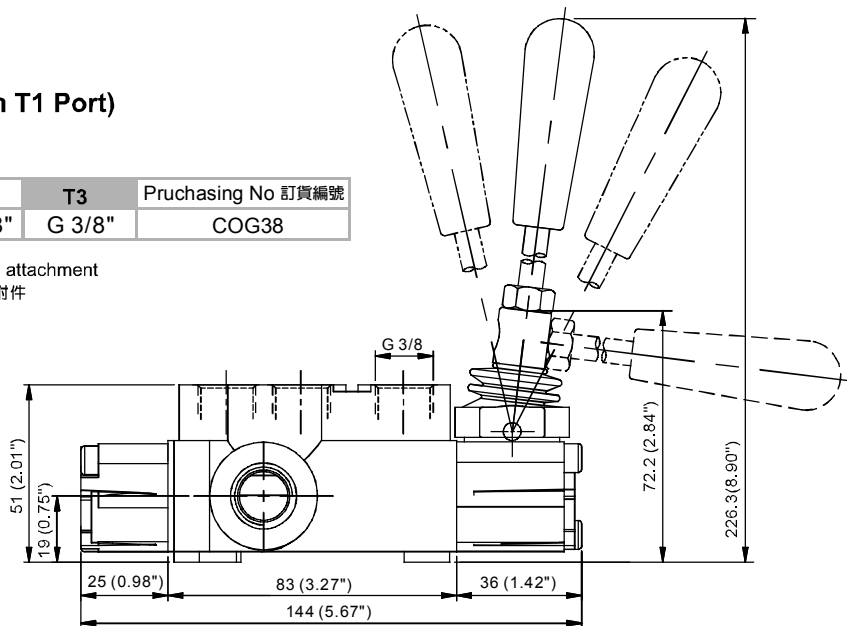


◆ AVAILABLE THREADS 適用螺紋


PORTS 閥口	P1	P2	A-B	T1	T2
DMB-03-****	G 3/8"	G 3/8"	G 3/8"	G 3/8"	G 3/8"

◆ MODEL 型 式

DMD-02T

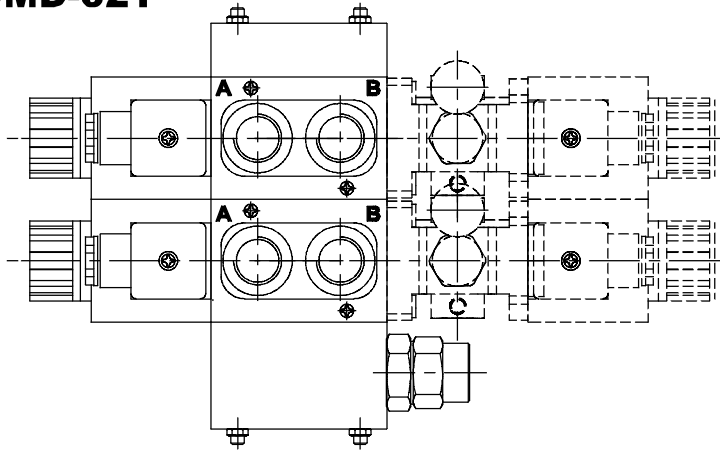

◆ CONTROL PORT(S) 動作形式

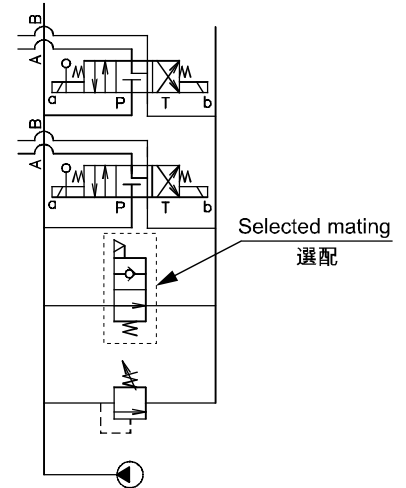

◆ SPECIFICATIONS 規 格

Model Number 型 式 號 碼	Maximum Pressure 最大壓力 bar	Maximum Flow 最大流量 lpm	Weight 重 量 Kg
DMD-02T	250 (3625 psi)	70 (18.5 gpm)	*
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-15~70 (-5~158 °F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

- Pressure regulation valve, set Max. pressure 210 bar when finish goods.
出廠壓力調節閥標準設定最大壓力210bar


◆ HOW TO ORDER 編號說明

1	2	3	4	5	6	7	8
DMD	***	02	T	**	*	1N	S1

1 VALVE SERIES 系列名稱

DMD = Solenoid Manual Operated
Stack Valve(sectional)
電磁式手動多路換向閥(片式)

2 SPOOL TYPES 滑柱型式

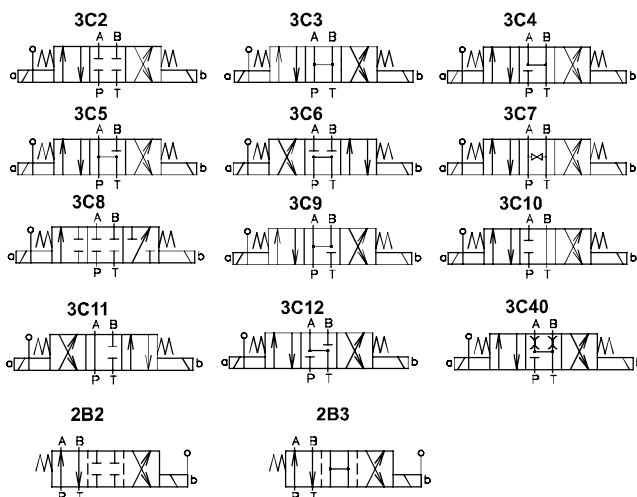

3 SUBPLATE MOUNTING SIZE 稱呼口徑

02=1/4"(6mm) ISO CETOP3
DIN NG 6 NFPA D03

4 CONNECTING TYPE 連接型式

T:TYPE:THREADING TYPE (螺紋連接)

5 TYPE OF COIL 電磁閥電磁線圈類型

A1 : AC110 60HZ D1 : DC12
A115 : AC115 50HZ D2 : DC24
A230 : AC230 50HZ
A2 : AC220 60HZ

6 WIRING TYPE 接線型式

Non:WIRING BOX TYPE(DIN) X : DOUBLE LEAD
無:接線盒式 (DIN) X:雙接線方式
P:AMP JUNIOR
P:AMP 連接器


7 NUMBER OF VALVE BLOCKS 連數

1N~7N = 1~7 BLOCKS


8 INLET SECTION WITH RELIEF VALVES AND RELEASE VALVE (SELECTED MATING) 入油側釋壓閥(選配)

S1:DC12V S2:DC24V
S3:RAC110V S4:RAC220V

※Extra attachment See Page 038 特別附件見頁面038



◆ DIMENSIONS 外型尺寸圖

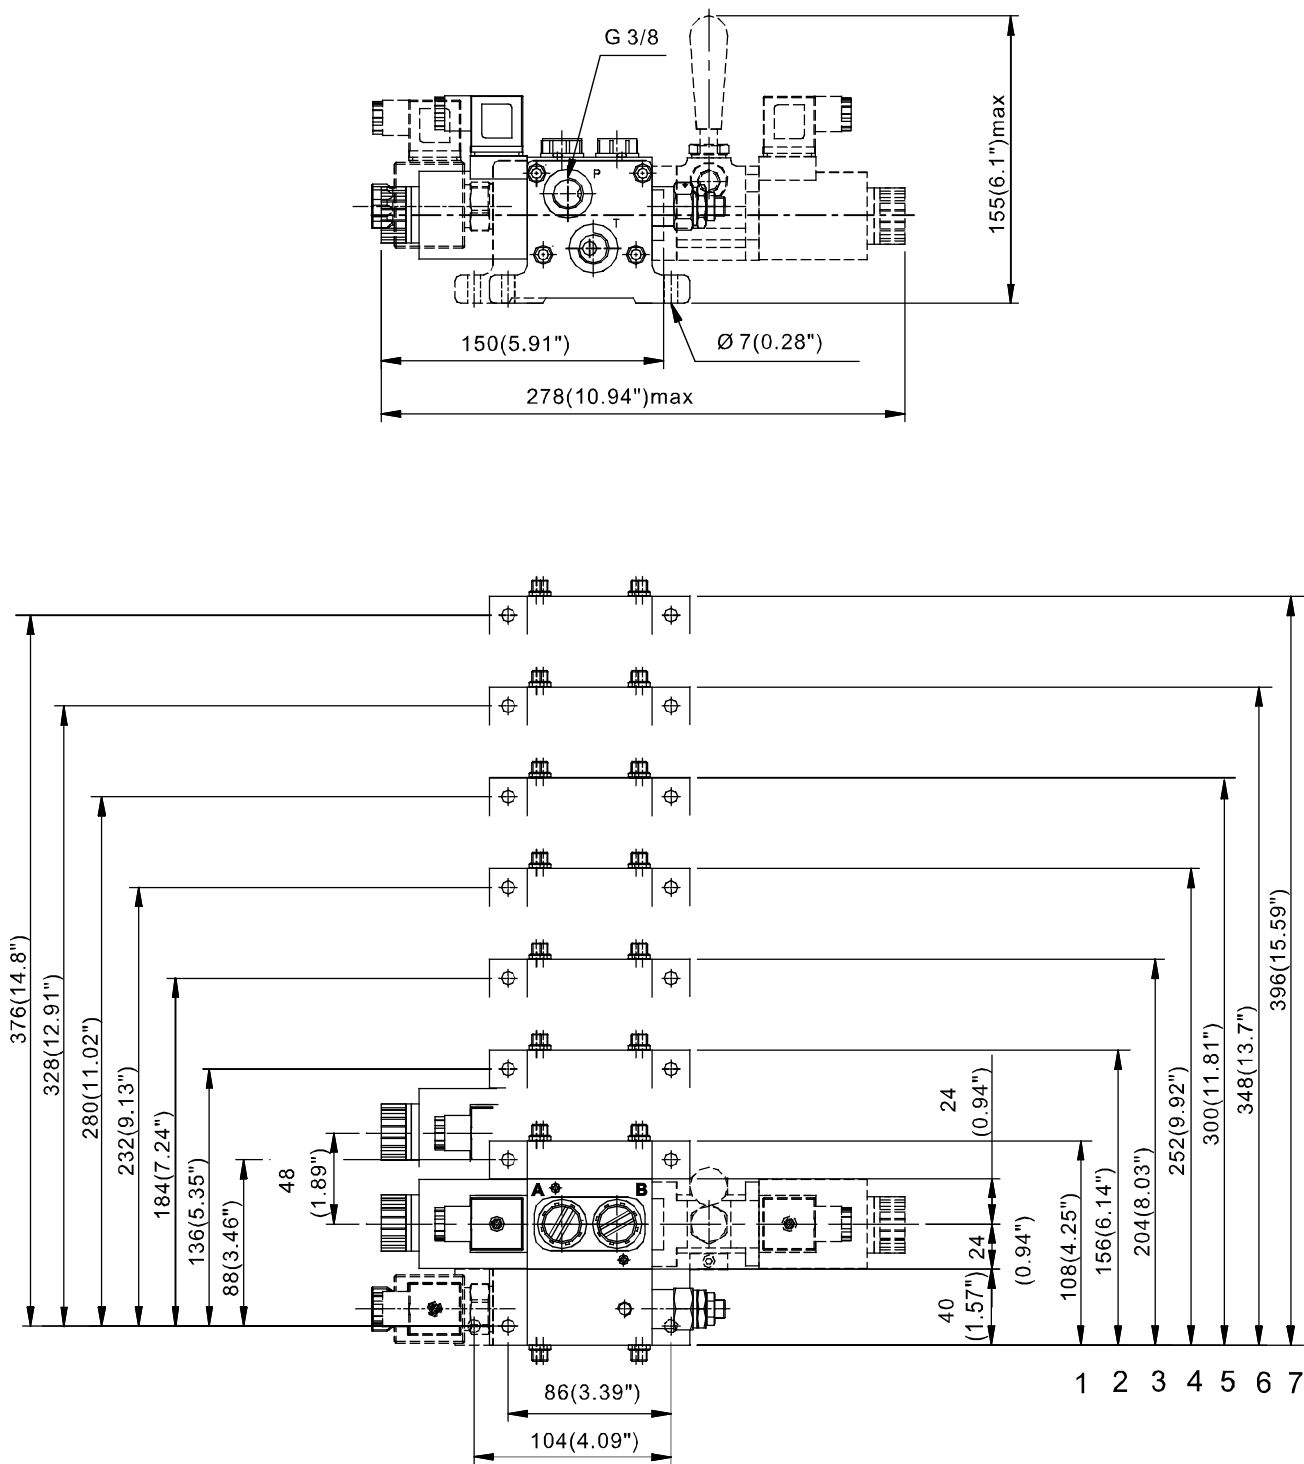


◆ AVAILABLE THREADS 適用螺紋


PORTS 閥口	P	A-B	T
DMD-02T-**-**	G 3/8"	G 3/8"	G 3/8"

◆ MODEL 型 式

DMD-04

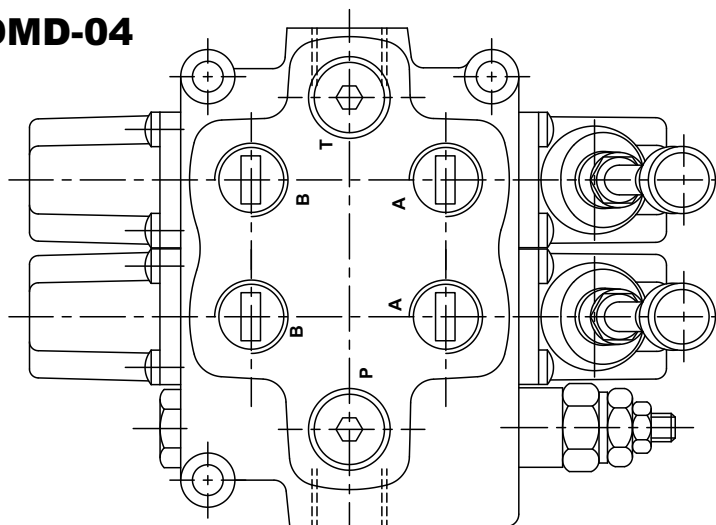

◆ CONTROL PORT(S) 動作形式

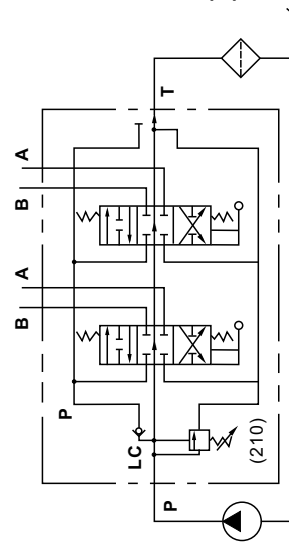

◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Maximum Flow 最大流量 lpm	Weight 重量 Kg
DMD-03-**-**	350 (5075 psi)	45 (11.9gpm)	*
DMD-04-**-**	350 (5075 psi)	70 (18.5gpm)	*
DMD-06-**-**	350 (5075 psi)	140 (35.28gpm)	*
Fluid Type 流體型式		ISO VG 32 , 46 , 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-15~70 (-5~158°F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

● Pressure regulation valve, set Max. pressure 210 bar when finish goods.

出廠壓力調節閥標準設定最大壓力210bar

※Need to establish the pressure when 350bar, please tell in advance

※The relief valves please refer to the VRV-03 , VNE-60 series

※如需設定壓力為350bar需先告知 ※調壓閥請參考VRV-03 , VNE-60系列

◆ HOW TO ORDER 編號說明

1	2	3	4	5	6	7	8	9
DMD	04	C	2	1N	F*	B*	I*	U*

1 VALVE SERIES 系列名稱

DMD = Stack Valve (Monoblock)
多路換向閥(單體式)

2 SUBPLATE MOUNTING SIZE 稱呼口徑

03 = G3/8" 04 = G1/2" 06 = G3/4"

3 MODEL 型式

C: SPRING TYPE 彈簧式

D: Steel Ball Positioning 鋼珠定位

4 SPOOL TYPES 滑柱型式

See Page 037

見頁面037

5 NUMBER OF VALVE BLOCKS 連數

1N~7N = 1~7 BLOCKS

6 CONTROL PORT 控制端(前蓋)

F* : Control Type 控制型式

See Page 042-043

見頁面042-043

None : Standard Type 無:標準型式

7 POSITIONING PORT 定位端(後蓋)

B*: Positioning Type 定位型式

See Page 044-045

見頁面044-045

None : Standard Type 無:標準型式

8 INLET SECTION 入油測

See Page 038

見頁面038

9 OUTLET SECTION 出油測

See Page 039

見頁面039

※The product needs the counter assembly please first to inform the factory, the counter assembly code number is "L"

※產品需逆組裝請先告知工廠，逆組裝代號為"L"。

STACK VALVE


DMD SERIES

多路換向閥系列

◆ DIMENSIONS 外型尺寸圖


● CARRY-OVER PLUG (on T1 Port)

轉接插頭 (接口在T1)



T1	T3	Pruchasing No 訂貨編號
G 1/2"	G 1/2"	COG12
G 1/2"	G 1/2"	

※Extra attachment
※特別附件

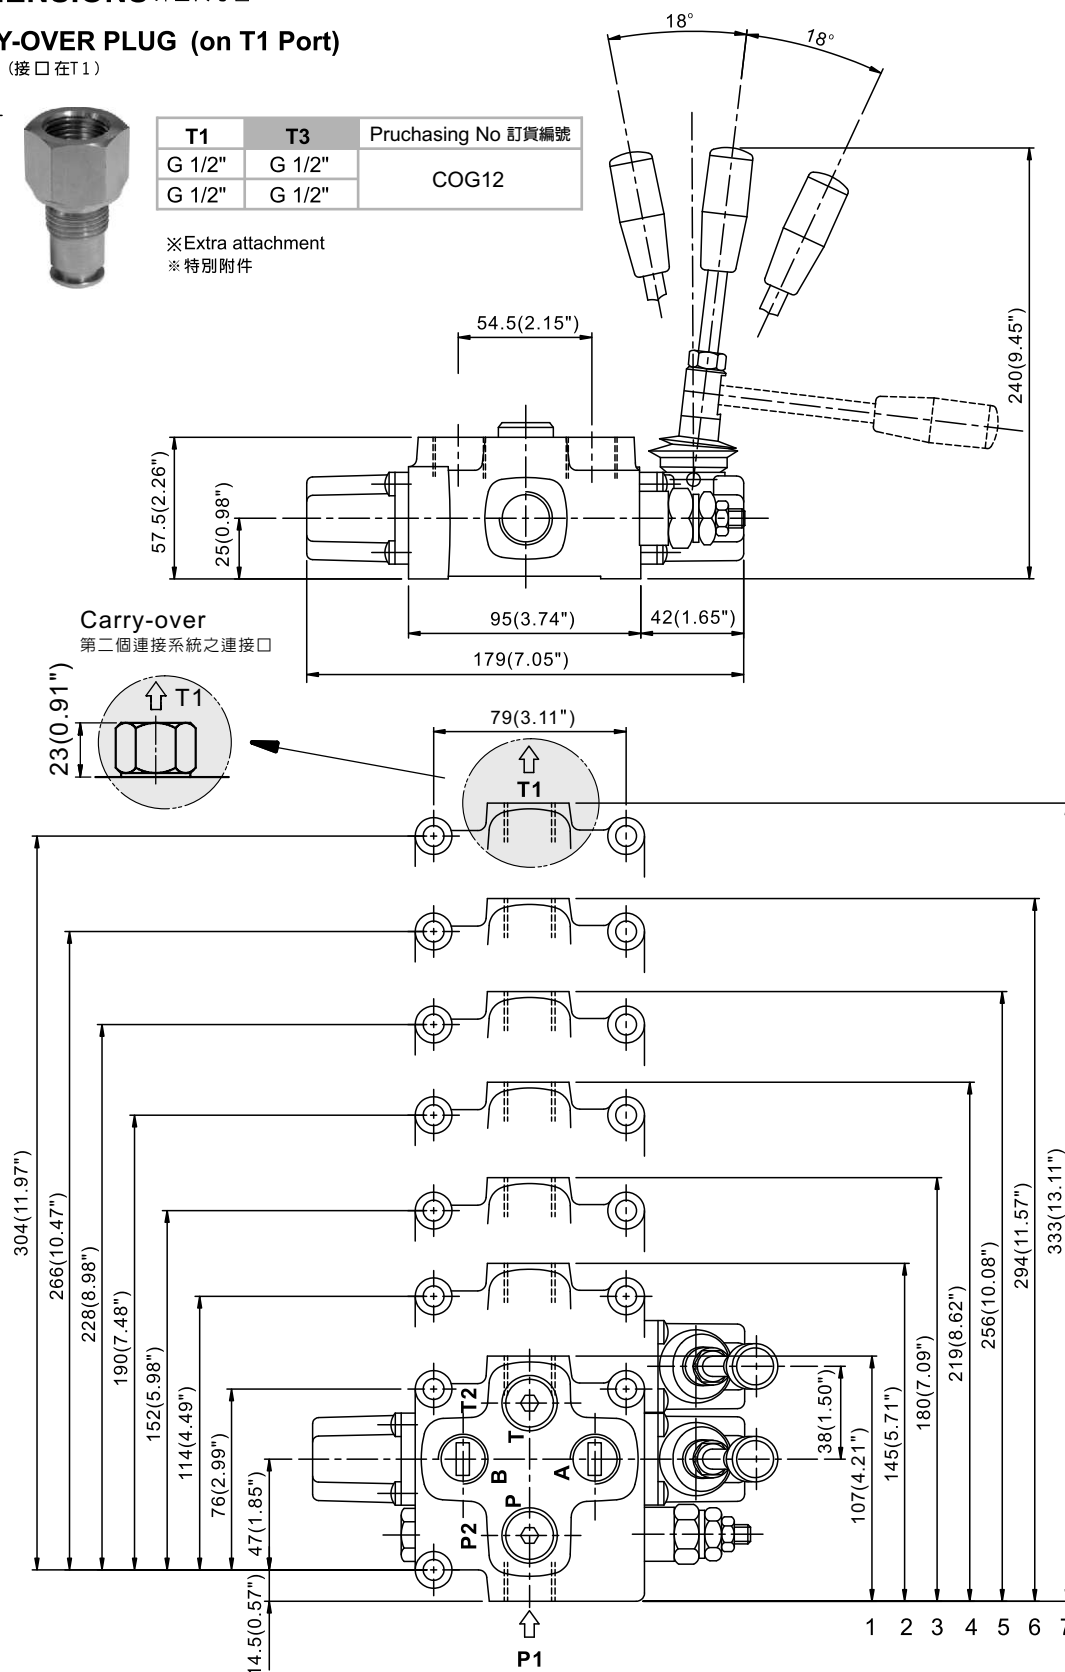


◆ AVAILABLE THREADS 適用螺紋

PORTS 閥口	P1	P2	A-B	T1	T2
DMD-03-**-**	G 1/2"	G 3/8"	G 3/8"	G 1/2"	G 3/8"
DMD-04-**-**	G 1/2"	G 1/2"	G 1/2"	G 1/2"	G 1/2"

◆ DIMENSIONS 外型尺寸圖 **DMD-06**


● CARRY-OVER PLUG (on T1 Port)

轉接插頭 (接口在T1)



T1	T3	Pruchasing No 訂貨編號
G 3/4"	G 3/4"	COG34
G 1"	G 1"	COG08

※Extra attachment
※特別附件

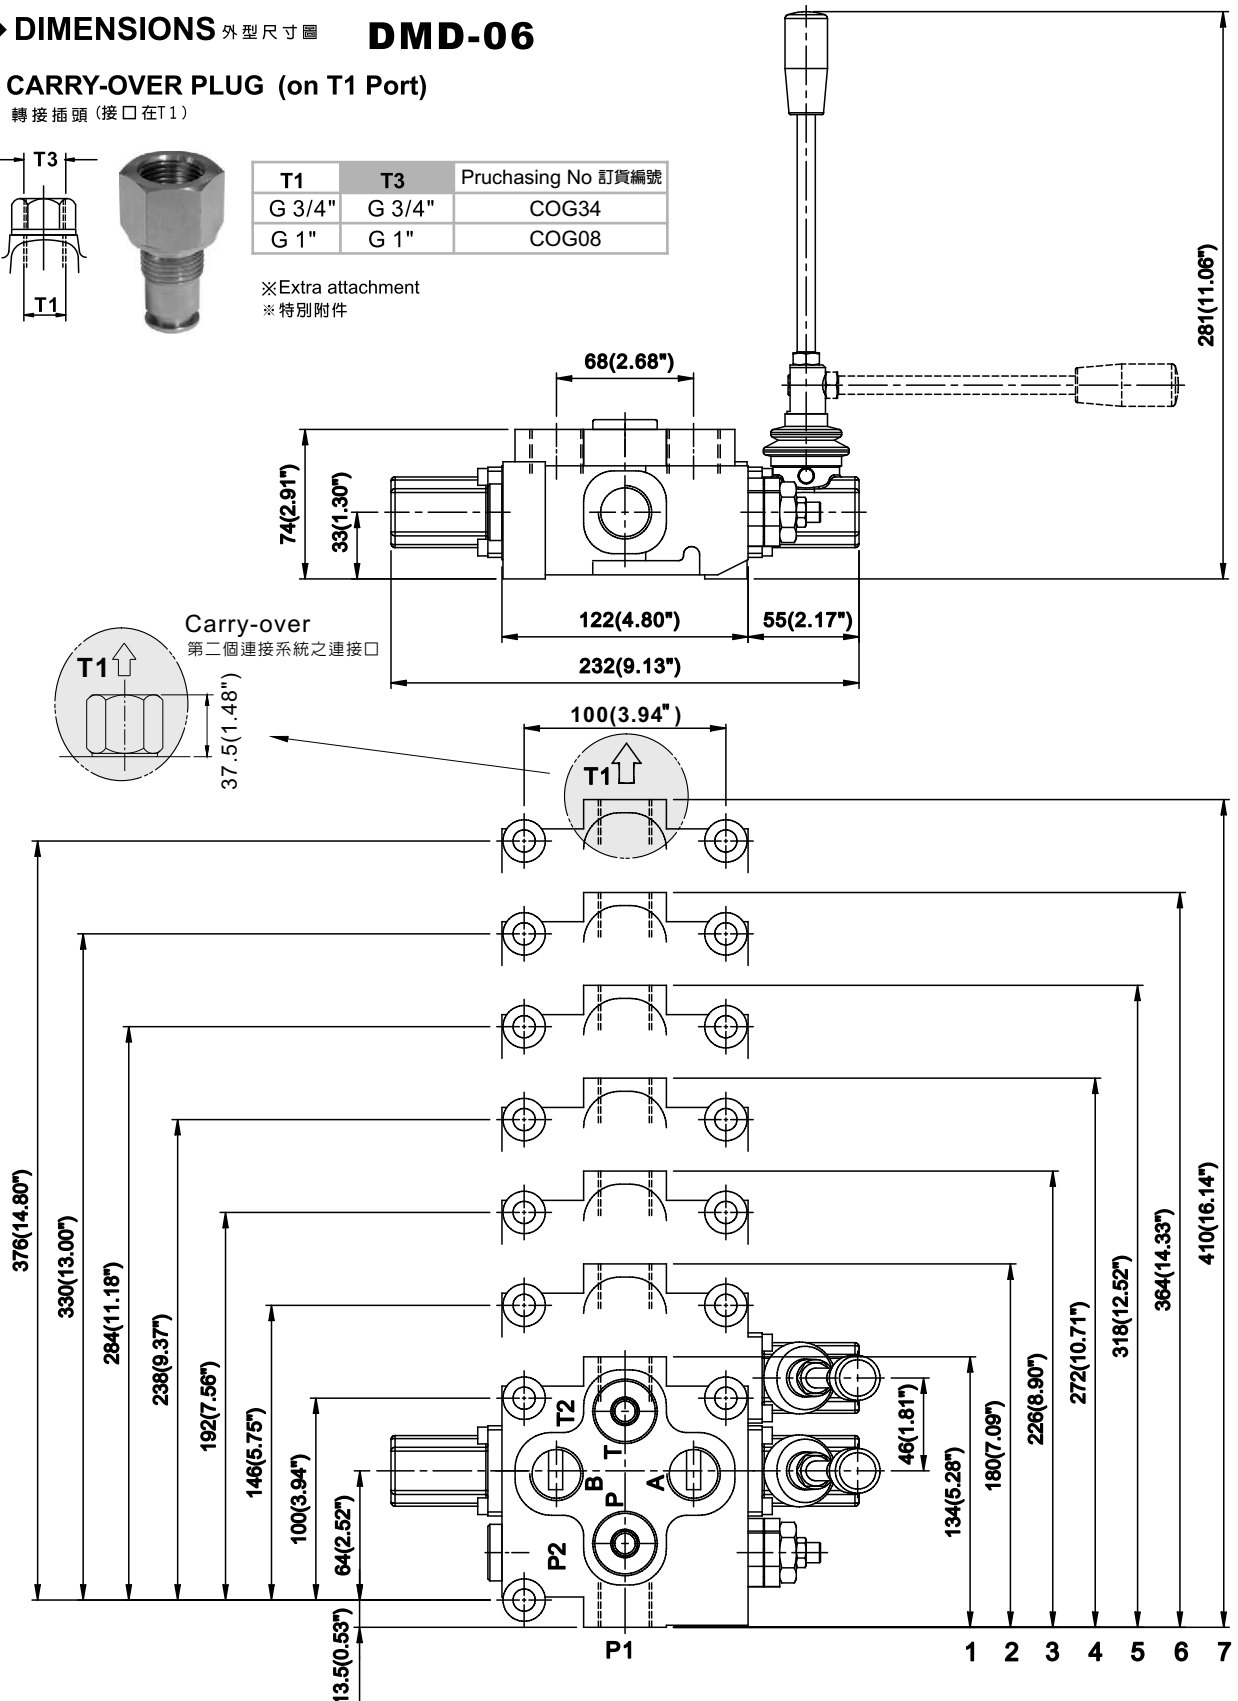


◆ AVAILABLE THREADS 適用螺紋


PORTS 閥口	P1	P2	A-B	T1	T2
DMD-06-***	G 3/4"	G 3/4"	G 3/4"	G 3/4"	G 3/4"
DMD-08-***	G 1"	G 3/4"	G 3/4"	G 1"	G 3/4"

◆ MODEL 型 式

DMD-35

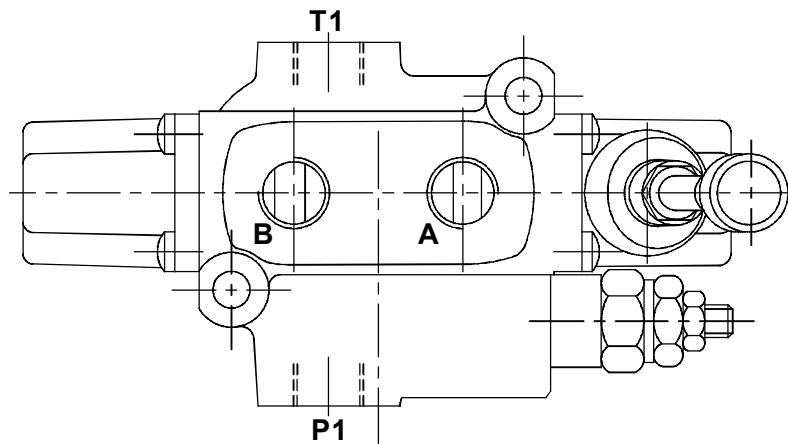

◆ CONTROL PORT(S) 動作形式

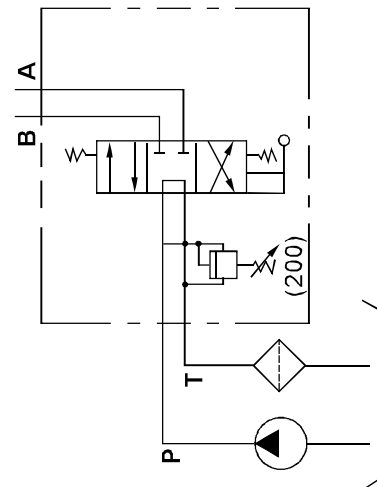

◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Maximum Flow 最大流量 lpm	Weight 重量 Kg
DMD-35-**-**	350 (5075 psi)	50 (13.2gpm)	4.5 (9.9 lbs)
DMD-45-**-**	350 (5075 psi)	70 (18.5gpm)	4.5 (9.9 lbs)
Fluid Type 流體型式		ISO VG 32 , 46 , 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-15~70 (-5~158 °F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

- Pressure regulation valve, set Max. pressure 210 bar when finish goods.
出廠壓力調節閥標準設定最大壓力210bar

※Need to establish the pressure when 350bar, please tell in advance
 ※The relief valves please refer to the VRV-03 series
 ※如需設定壓力為350bar需先告知 ※調壓閥請參考VRV-03系列

◆ HOW TO ORDER 編號說明

1	2	3
DMD	35	C6

1 VALVE SERIES 系列名稱

DMD = Stack Valve (Monoblock)
多路換向閥(單體式)

2 SUBPLATE MOUNTING SIZE 稱呼口徑

35 = G3/8"
45 = G1/2"


3 MODEL 型式

C: SPRING TYPE 彈簧式
D: Steel Ball Positioning 鋼珠定位

STACK VALVE

DMD SERIES 多路換向閥系列

◆ DIMENSIONS 外型尺寸圖

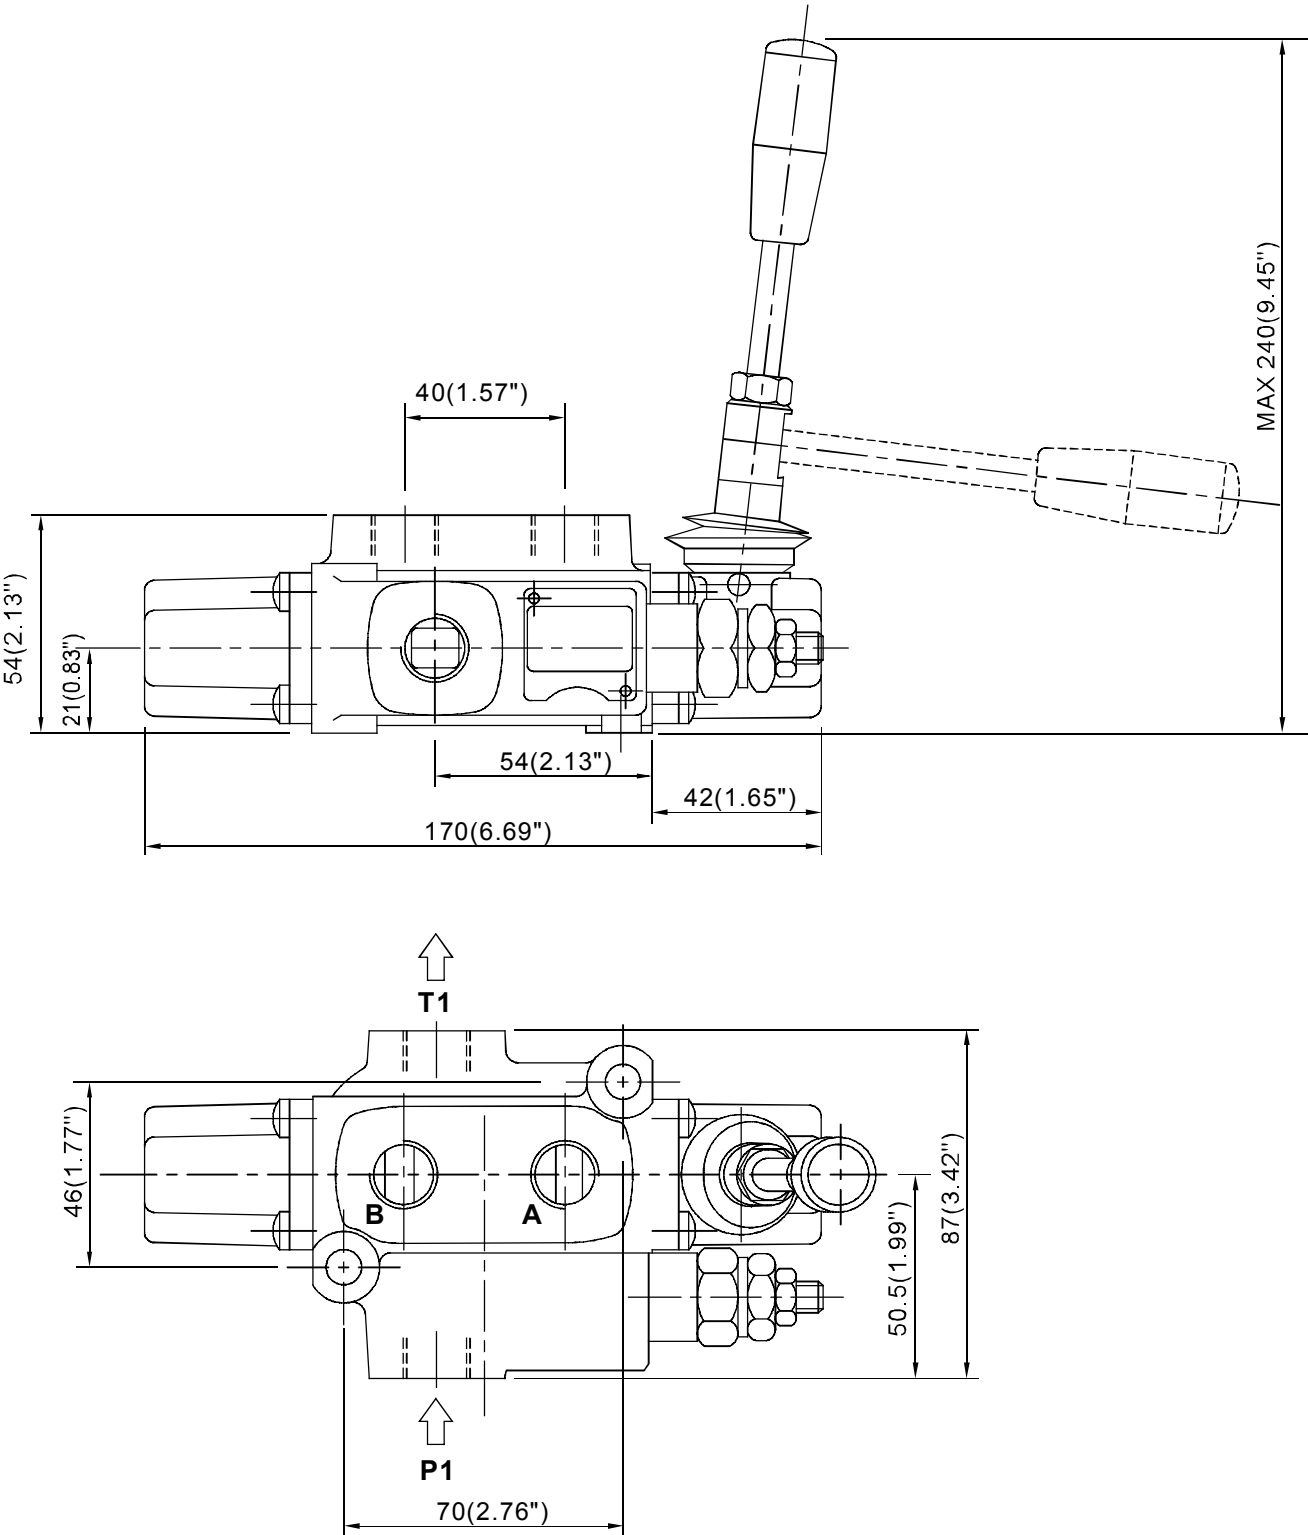


◆ AVAILABLE THREADS 適用螺紋


PORTS 閥口	P1	A-B	T1
DMD-35-**-**	G 3/8"	G 3/8"	G 3/8"
DMD-45-**-**	G 1/2"	G 1/2"	G 1/2"

◆ MODEL 型 式

DME-04

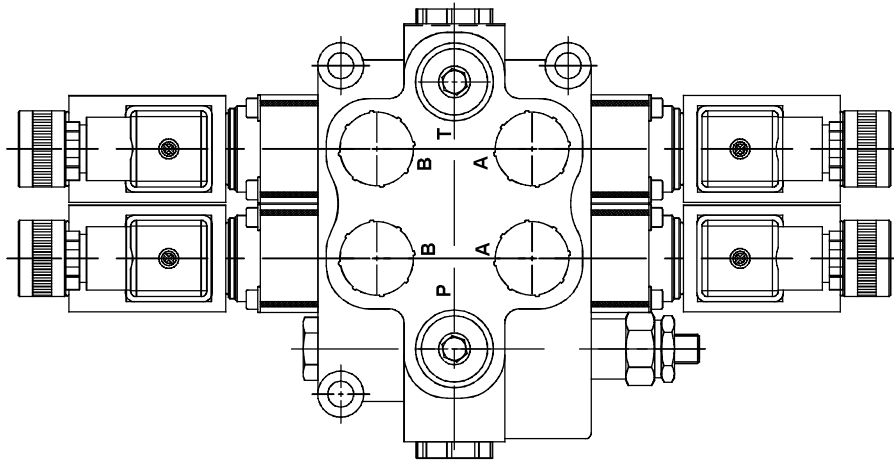

◆ CONTROL PORT(S) 動作形式

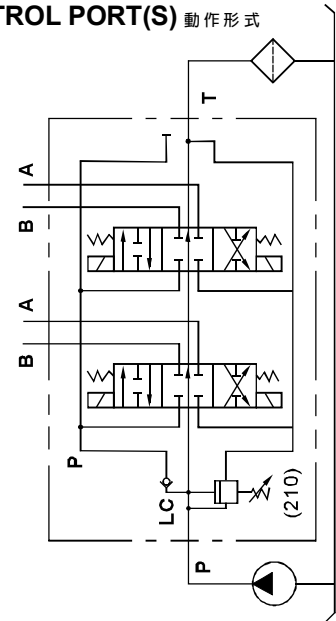

◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Maximum Flow 最大流量 lpm	Weight 重量 Kg
DME-03-**-**	350 (5075 psi)	45 (11.9gpm)	*
DME-04-**-**	350 (5075 psi)	70 (18.5gpm)	*
Fluid Type 流體型式		ISO VG 32 , 46 , 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-15~70 (-5~158 °F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

- Pressure regulation valve, set Max. pressure 210 bar when finish goods.
出廠壓力調節閥標準設定最大壓力210bar

※Need to establish the pressure when 350bar, please tell in advance
※The relief valves please refer to the VRV-03 series
※如需設定壓力為350bar需先告知 ※調壓閥請參考VRV-03系列

◆ HOW TO ORDER 編號說明

1	2	3	4	5	6	7
DME	04	C2	1N	I*	U*	**

- 1 VALVE SERIES 系列名稱**
DME = Solenoid Stack Valve (Monoblock)
電磁式多路換向閥(單體式)

- 5 INLET SECTION 入油測**
See Page 038
見頁面038

- 2 SUBPLATE MOUNTING SIZE 稱呼口徑**
03 = G3/8" 04 = G1/2"

- 6 OUTLET SECTION 出油測**
See Page 039
見頁面039

- 3 SPOOL TYPES 滑柱型式**
See Page 037
見頁面037


- 7 COIL TYPES 電磁線圈類型**
D1: DC12V D2: DC24V

- 4 NUMBER OF VALVE BLOCKS 連數**
1N~7N = 1~7 BLOCKS

◆ DIMENSIONS 外型尺寸圖


● CARRY-OVER PLUG (on T1 Port)

轉接插頭 (接口在T1)



T1	T3	Purchasing No 訂貨編號
G 1/2"	G 1/2"	COG12
G 1/2"	G 1/2"	

※Extra attachment
※特別附件

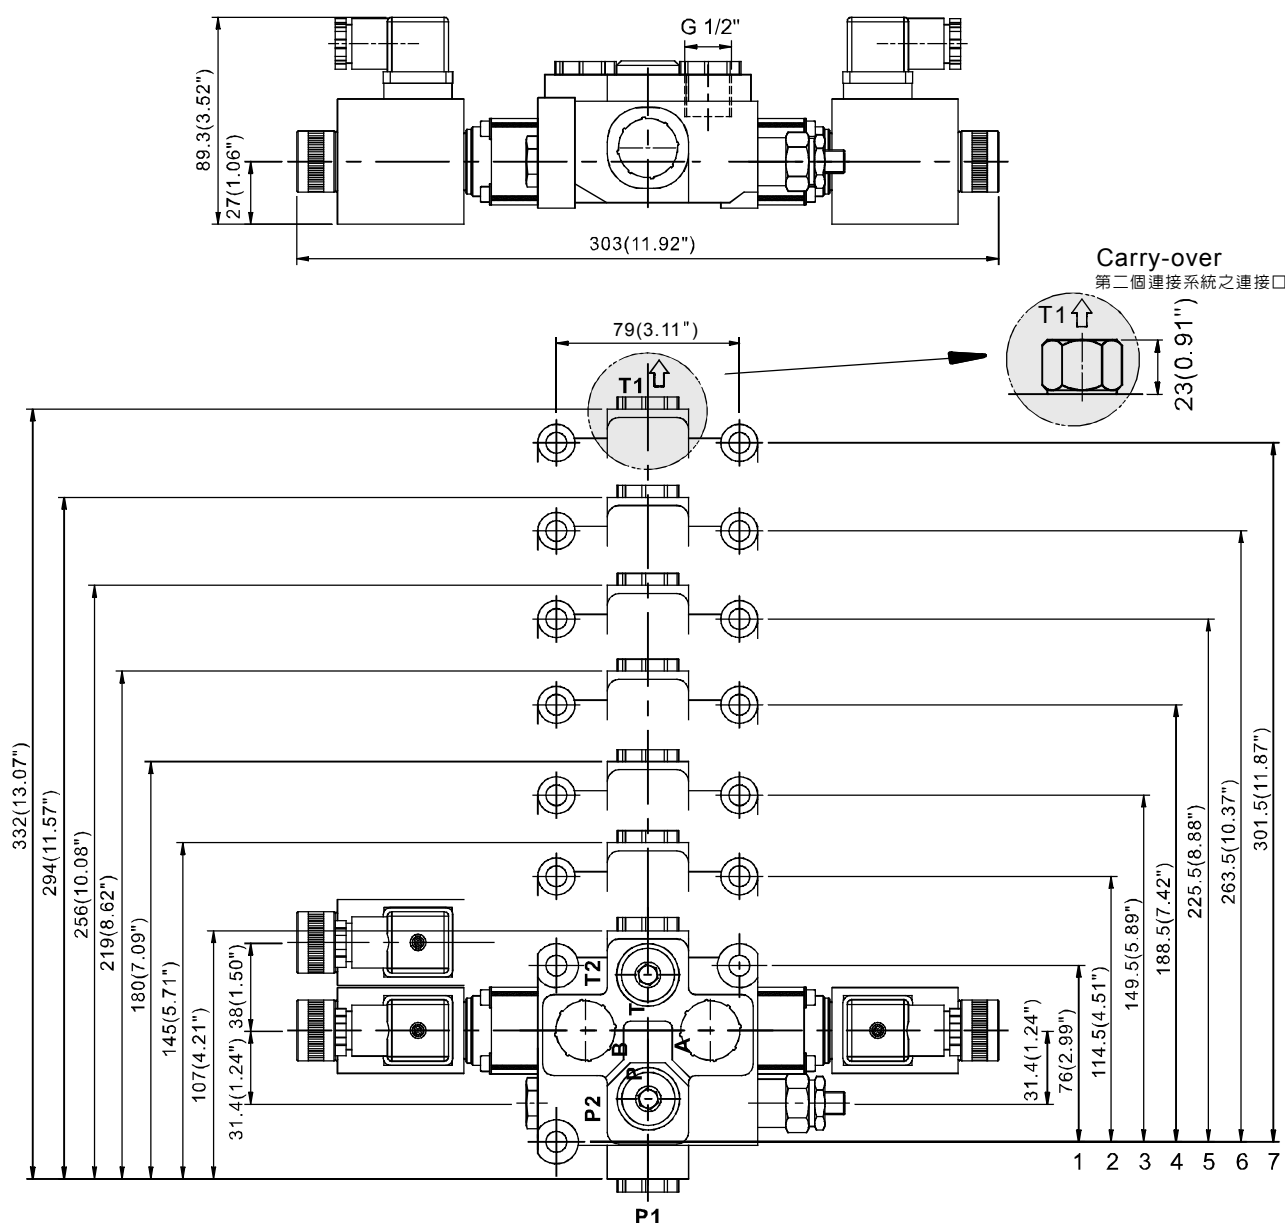


◆ AVAILABLE THREADS 適用螺紋


PORTS 閥口	P1	P2	A-B	T1	T2
DME-03-**-**	G 1/2"	G 3/8"	G 3/8"	G 1/2"	G 3/8"
DME-04-**-**	G 1/2"	G 1/2"	G 1/2"	G 1/2"	G 1/2"

◆ MODEL 型 式

DMF-04

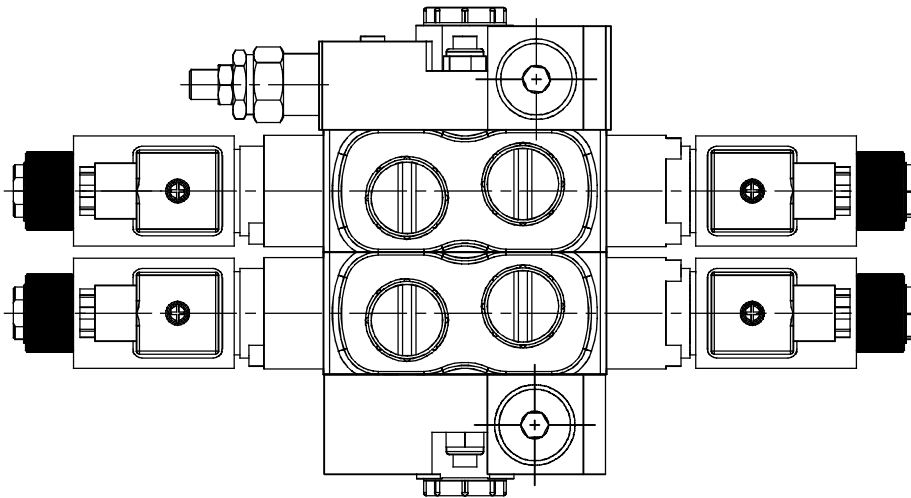

◆ CONTROL PORT(S) 動作形式

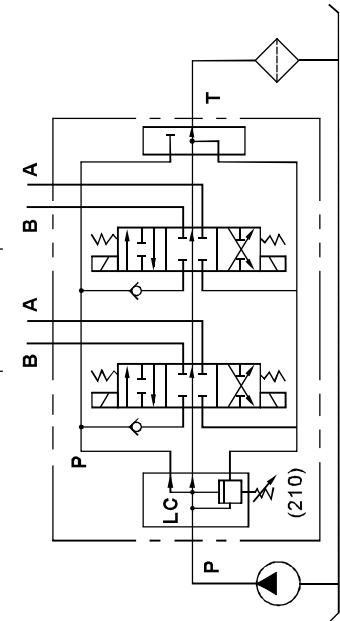

◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Maximum Flow 最大流量 lpm	Weight 重量 Kg
DMF-03-**-**	350 (5075 psi)	45 (11.9gpm)	*
DMF-04-**-**	350 (5075 psi)	70 (18.5gpm)	*
Fluid Type 流體型式		ISO VG 32 , 46 , 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-15~70 (-5~158 °F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

- Pressure regulation valve, set Max. pressure 210 bar when finish goods.
出廠壓力調節閥標準設定最大壓力210bar

※Need to establish the pressure when 350bar, please tell in advance
※The relief valves please refer to the VRV-03 series
※如需設定壓力為350bar需先告知 ※調壓閥請參考VRV-03系列

◆ HOW TO ORDER 編號說明

1	2	3	4	5	6	7
DMF	04	C2	1N	I*	U*	**

- 1 VALVE SERIES** 系列名稱
DMF = Solenoid Stack Valve (sectional)
電磁式多路換向閥(片式)

- 5 INLET SECTION** 入油測
See Page 038
見頁面038

- 2 SUBPLATE MOUNTING SIZE** 稱呼口徑
03 = G3/8" 04 = G1/2"

- 6 OUTLET SECTION** 出油測
See Page 039
見頁面039

- 3 SPOOL TYPES** 滑柱型式
See Page 037
見頁面037

- 7 COIL TYPES** 電磁線圈類型
D1: DC12V D2: DC24V

- 4 NUMBER OF VALVE BLOCKS** 連數
1N~7N = 1~7 BLOCKS

STACK VALVE


DMF SERIES

多路換向閥系列

◆ DIMENSIONS 外型尺寸圖



● CARRY-OVER PLUG (on T1 Port)

轉接插頭 (接口在T1)



T1	T3	Purchasing No 訂貨編號
G 1/2"	G 1/2"	COG12
G 1/2"	G 1/2"	

※Extra attachment
※特別附件

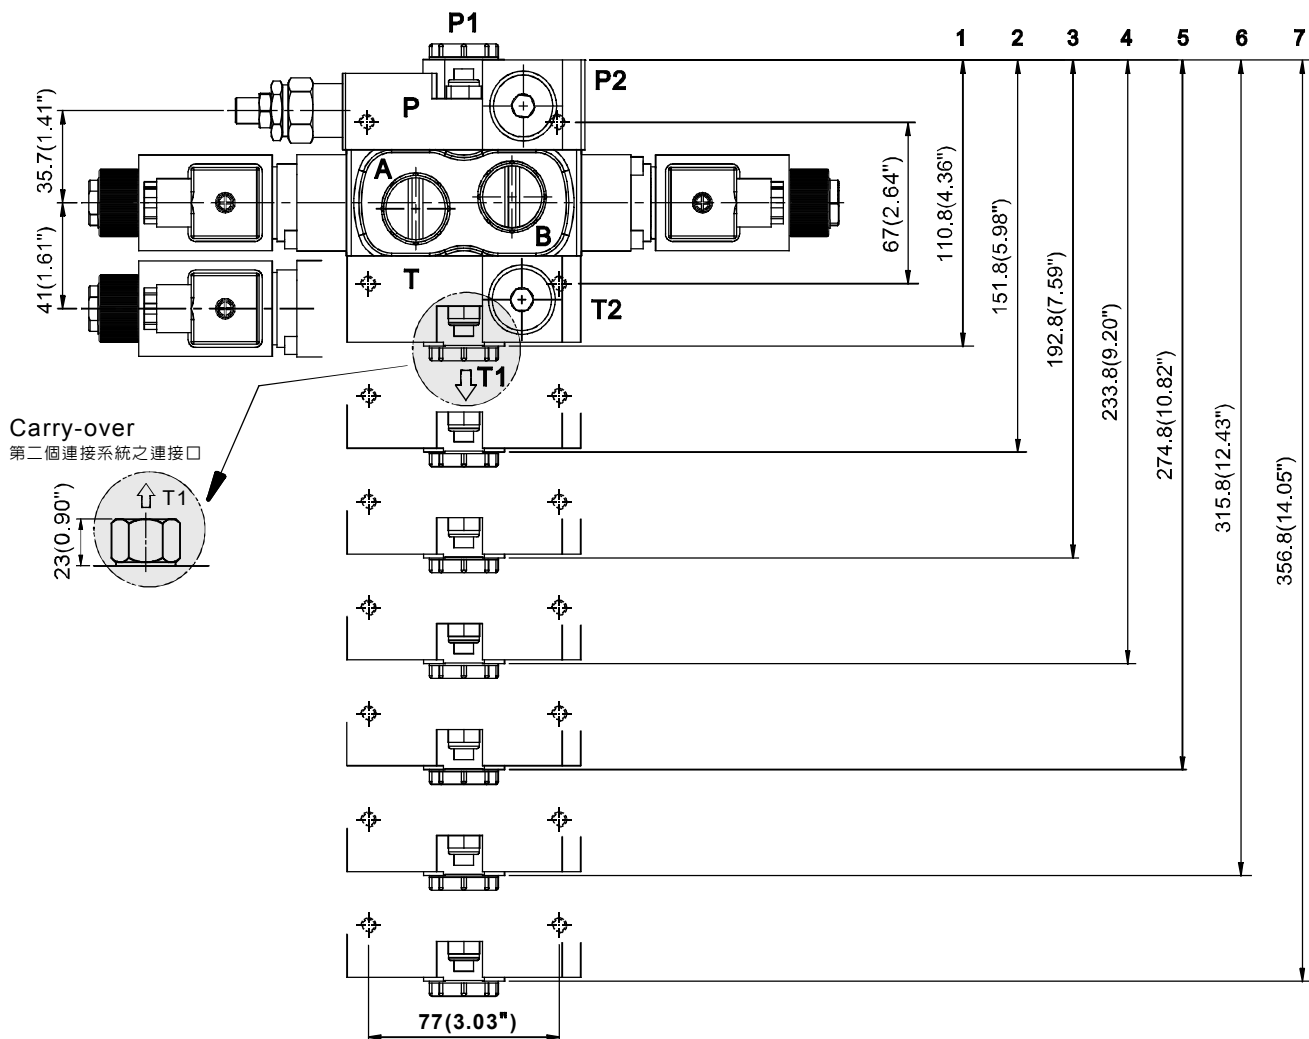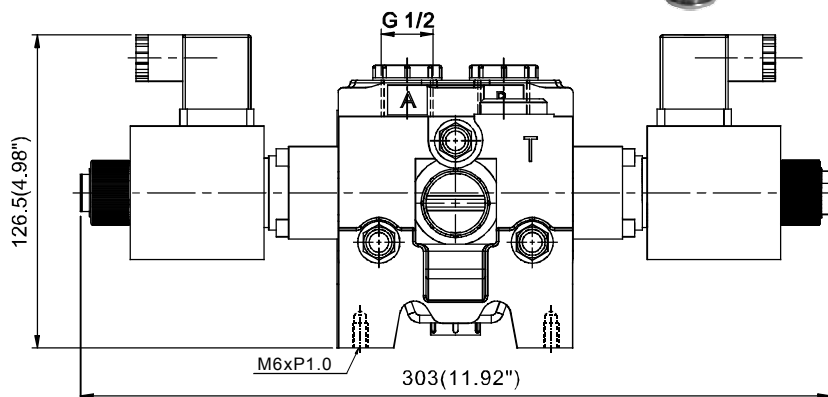


◆ AVAILABLE THREADS 適用螺紋


PORTS 閥口	P1	P2	A-B	T1	T2
DMF-03-**-**	G 1/2"	G 1/2"	G 3/8"	G 1/2"	G 1/2"
DMF-04-**-**	G 1/2"	G 1/2"	G 1/2"	G 1/2"	G 1/2"

◆ MODEL 型 式

DMG-04

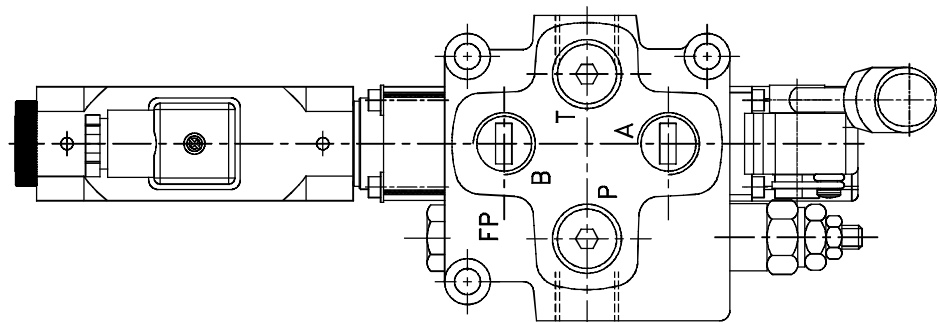

◆ CONTROL PORT(S) 動作形式

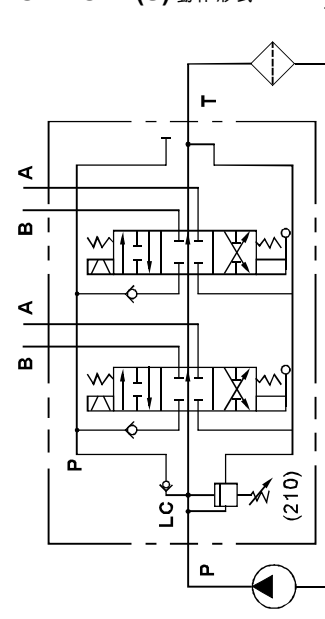

◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Maximum Flow 最大流量 lpm	Weight 重量 Kg
DMG-03-**-**	350 (5075 psi)	45 (11.9gpm)	*
DMG-04-**-**	350 (5075 psi)	70 (18.5gpm)	*
DMG-06-**-**	350 (5075 psi)	140 (35.28gpm)	*
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-15~70 (-5~158°F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

- Pressure regulation valve, set Max. pressure 210 bar when finish goods.
出廠壓力調節閥標準設定最大壓力210bar

※Need to establish the pressure when 350bar, please tell in advance
※The relief valves please refer to the VRV-03 series
※如需設定壓力為350bar需先告知 ※調壓閥請參考VRV-03系列

◆ HOW TO ORDER 編號說明

1	2	3	4	5	6	7
DMG	04	C2	1N	I*	U*	**

1 VALVE SERIES 系列名稱

DMG = Solenoid Manual Operated
Stack Valve (Monoblock)
電磁式手動多路換向閥(單體式)

5 INLET SECTION 入油測

See Page 038
見頁面038

2 SUBPLATE MOUNTING SIZE 稱呼口徑

03 = G3/8" 04 = G1/2" 06 = G3/4"

6 OUTLET SECTION 出油測

See Page 039
見頁面039

3 SPOOL TYPES 滑柱型式

See Page 037
見頁面037

7 COIL TYPES 電磁線圈類型

D1: DC12V D2: DC24V

4 NUMBER OF VALVE BLOCKS 連數


1N~7N = 1~7 BLOCKS

※The product needs the counter assembly please first to inform the factory, the counter assembly code number is "L"
※產品需逆組裝請先告知工廠，逆組裝代號為"L"。

◆ DIMENSIONS 外型尺寸圖

● CARRY-OVER PLUG (on T1 Port)


轉接插頭 (接口在T1)




T1	T3	Purchasing No 訂貨編號
G 1/2"	G 1/2"	COG12
G 1/2"	G 1/2"	

※Extra attachment
※特別附件

● CODE 編碼





1-2 Port A
1-2 接口 A
1-3 Port B
1-3 接口 B

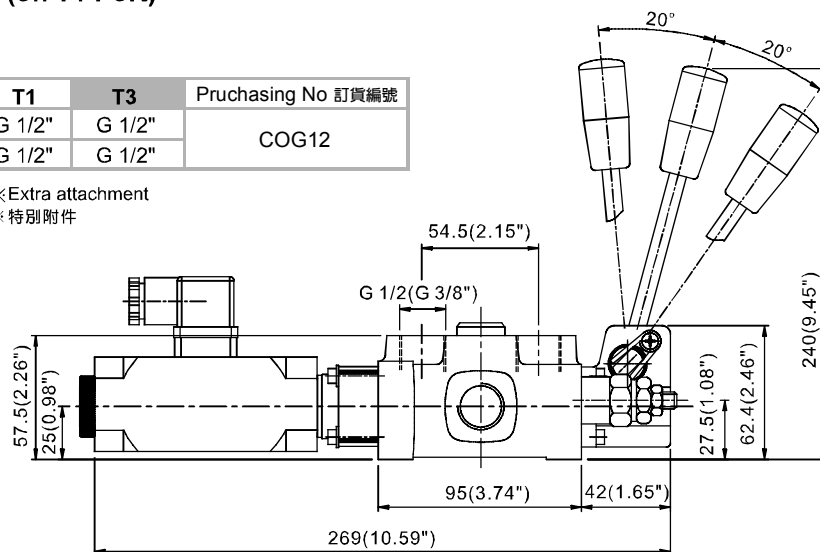

Carry-over

第二個連接系統之連接口

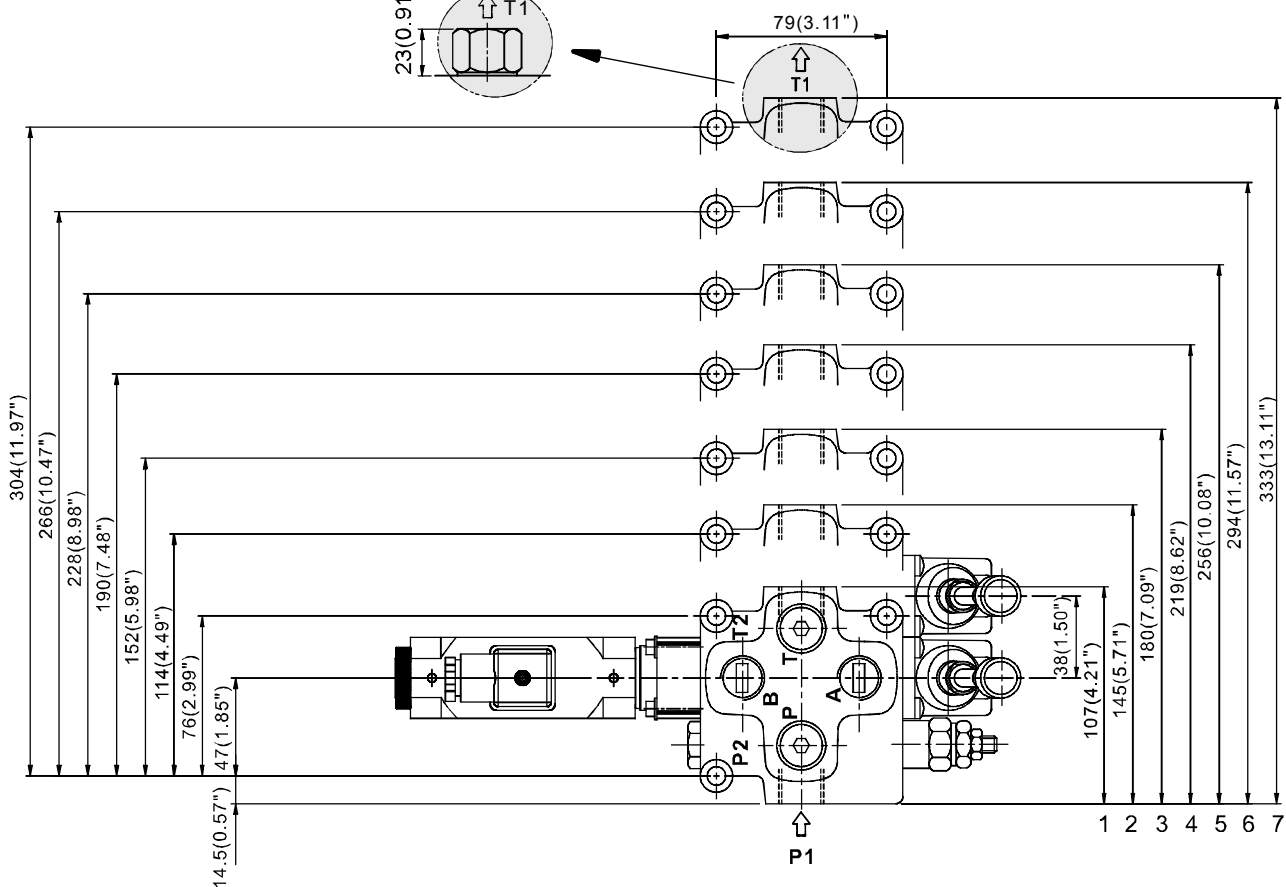


◆ AVAILABLE THREADS 適用螺紋

PORTS 閥口	P1	P2	A-B	T1	T2
DMG-03-**-**	G 1/2"	G 3/8"	G 3/8"	G 1/2"	G 3/8"
DMG-04-**-**	G 1/2"	G 1/2"	G 1/2"	G 1/2"	G 1/2"

◆ DIMENSIONS 外型尺寸圖 DMG-06


● CARRY-OVER PLUG (on T1 Port)

轉接插頭 (接口在T1)




T1	T3	Purchasing No 訂貨編號
G 3/4"	G 3/4"	COG34
G 1"	G 1"	COG08


※Extra attachment
※特別附件

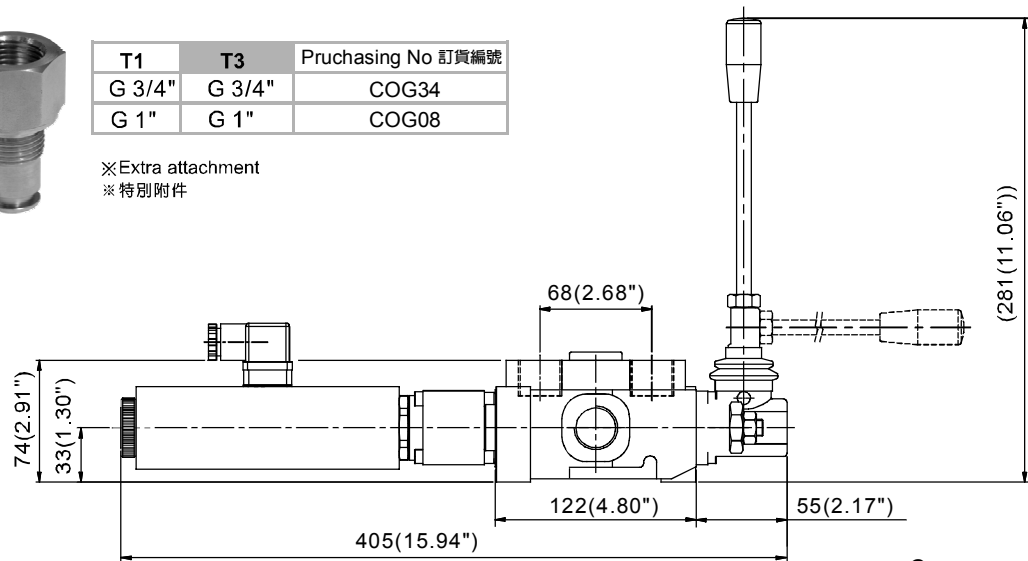

● CODE 編碼



Carry-over
第二個連接系統之連接口

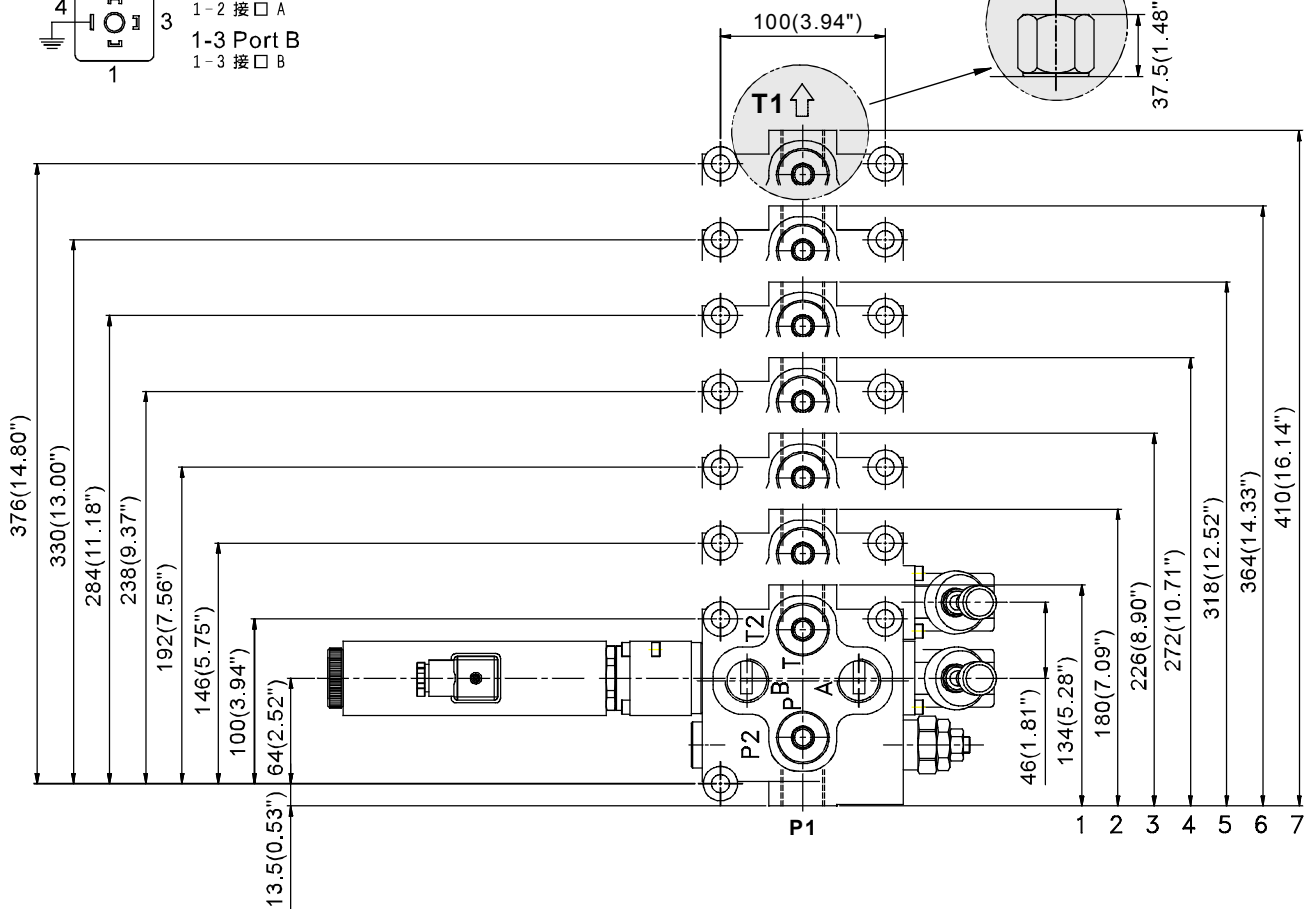

◆ AVAILABLE THREADS 適用螺紋

PORTS 閥口	P1	P2	A-B	T1	T2
DMG-06-**-**	G 3/4"	G 3/4"	G 3/4"	G 3/4"	G 3/4"
DMG-08-**-**	G 1"	G 3/4"	G 3/4"	G 1"	G 3/4"