

**TECHNICAL SPECIFICATION**





|                   |                                 |                  |                       |
|-------------------|---------------------------------|------------------|-----------------------|
| Piston Size       | $\phi 30.23\text{mm} \times 4$  |                  |                       |
| Piston Area       | $14.4\text{cm}^2 \times 2$      | 'PL' Dimension   | 30.75mm               |
| Piston Material   | Aluminum Alloy                  | Caliper Body     | 2 pieces              |
| Disc Diameter     | $\phi 320(\text{MAX})\text{mm}$ | Caliper Material | Aluminum Alloy Forged |
| Disc Thicknesses  | 3.5(MIN)~5(MAX)mm               |                  |                       |
| Weight(Less Pads) | 0.72kg                          |                  |                       |
| Hydraulic Threads | M10*1.25                        |                  |                       |
| Mounting          | Radial                          |                  |                       |
| - centres         | 80mm                            |                  |                       |
| - offset          | 33.6mm                          |                  |                       |
| - hole $\phi$     | 8.1mm                           |                  |                       |

**PAD FAMILY(LEA6)**Pad Area= $19.63\text{cm}^2$ 

Pad Depth=30mm

Pad Thickness - Sintered=8.3mm(plate thickness 3.6mm)

Pad Weight =0.28kg(2 pieces)

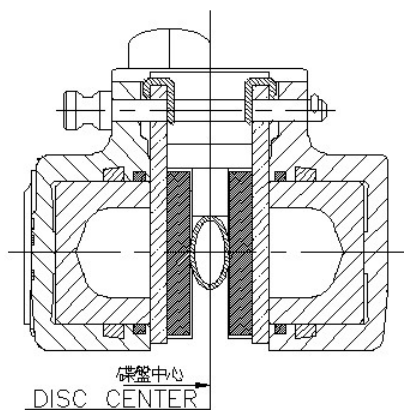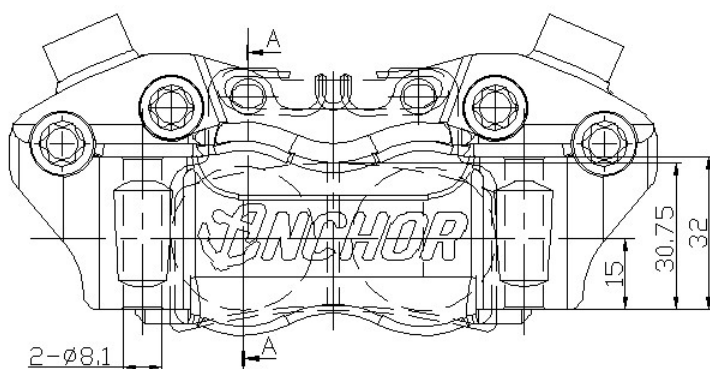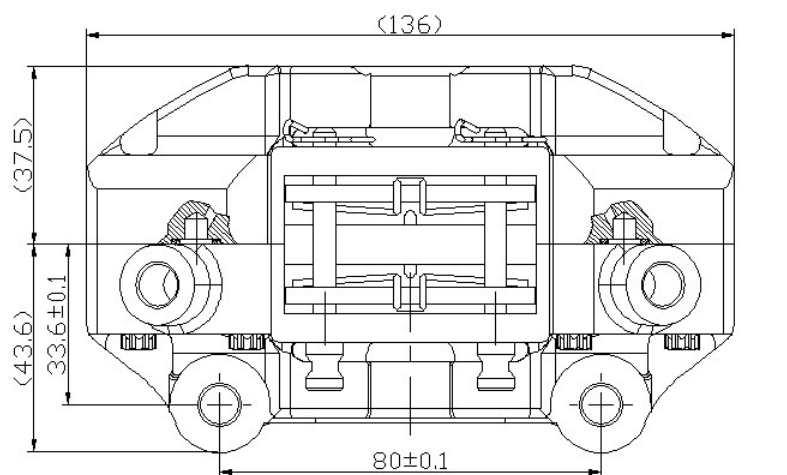

unit:mm



泓輔企業股份有限公司

Horng Fuu Industrial CO.,LTD.