



ROLLER CHAIN ATTACHMENTS


SA1

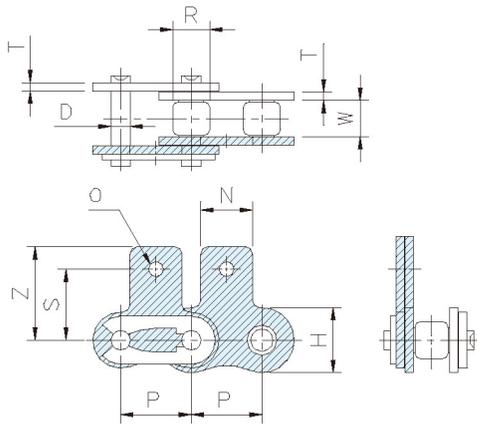


SK1

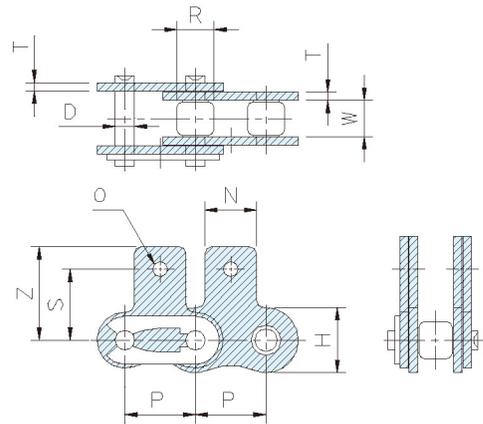

A1

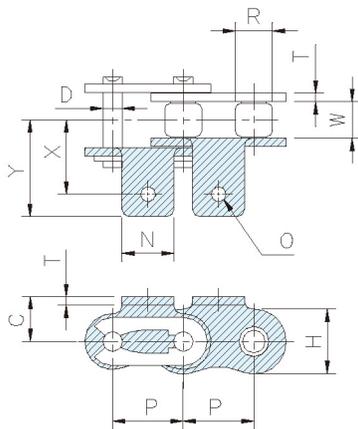

K1

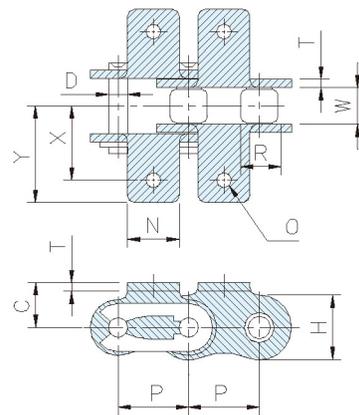


CHAIN NO.	Pitch		Width	Roller	Plate		Pin	Attachment							Ultimate Strength kgf(min)
	P		W	Dia	Height	Thick.	Dia	A-1,K-1			SA-1,SK-1				
	inch	mm	(min)	R(max)	H(max)	T	D(max)	N	O(min)	C	X	Y	S	Z	
25	1/4"	6.35	3.10	3.30	6.02	0.75	2.31	5.60	3.45	4.75	7.15	10.70	—	—	357
35	3/8"	9.525	4.68	5.08	9.05	1.25	3.60	7.90	2.60 3.30	6.35	9.50	14.30	9.50	14.55	806
41	1/2"	12.70	6.25	7.77	9.91	1.25	3.60	9.50	3.20	—	—	—	12.24	17.73	684
40	1/2"	12.70	7.85	7.92	12.07	1.50	3.98	9.50	3.50	8.00	12.70	17.80	12.70	17.40	1418
50	5/8"	15.875	9.40	10.16	15.09	2.00	5.09	12.70	5.10	10.30	15.90	23.40	15.90	23.05	2224
60	3/4"	19.05	12.57	11.91	18.10	2.40	5.96	15.90	5.10	11.90	19.05	28.20	18.30	26.85	3194
80	1"	25.40	15.75	15.88	24.13	3.20	7.94	19.10	6.70	15.90	25.40	36.60	24.60	35.45	5673
100	1-1/4"	31.75	18.90	19.05	30.17	4.00	9.54	25.40	8.60	19.80	31.75	44.90	31.80	44.00	8878
120	1-1/2"	38.10	25.22	22.23	36.20	4.80	11.11	28.60	9.80	23.00	38.10	55.80	—	—	12755
160	2"	50.80	31.55	28.58	48.26	6.40	14.29	38.10	13.10	31.80	50.80	71.80	—	—	22755


Any special specifications, please feel free to contact us.

ROLLER CHAIN ATTACHMENTS


WSA1

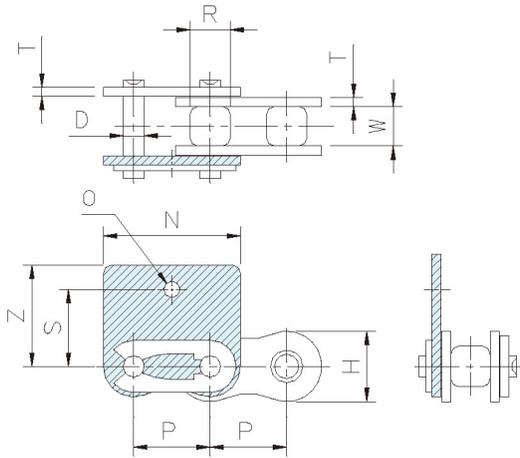


WSK1

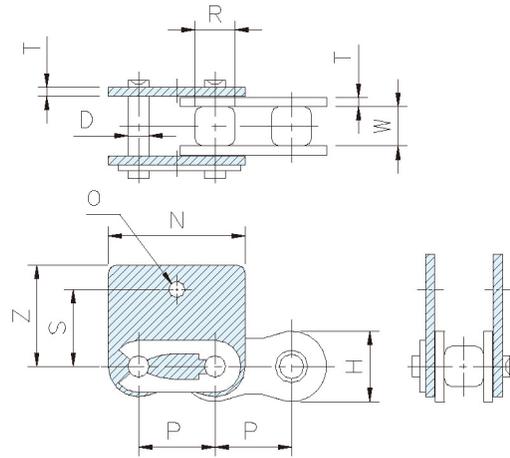

WA1

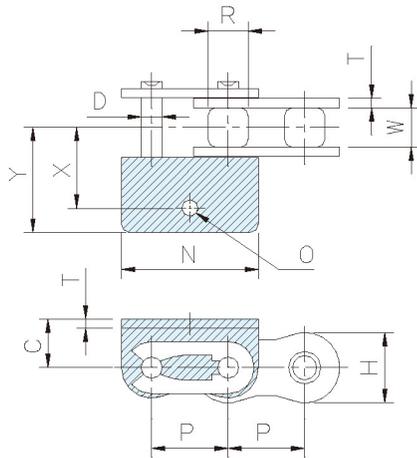

WK1

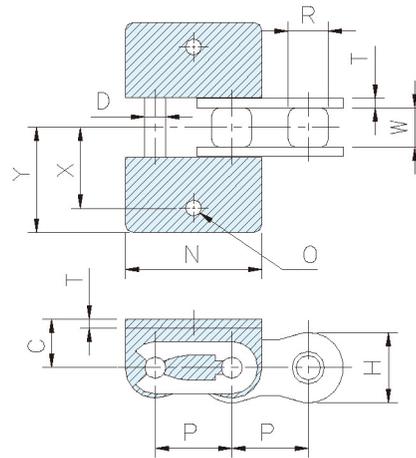


CHAIN NO.	Pitch		Width	Roller	Plate		Pin	Attachment							Ultimate Strength kgf(min)	
	P		W	Dia	Height	Thick.	Dia	WA1	WSA1	WA1,WK1			WSA1,WSK1			
	inch	mm	(min)	R(max)	H(max)	T	D(max)	N	O(min)	C	X	Y	S	Z		
35	3/8"	9.525	4.68	5.08	9.05	1.25	3.60	17.10	3.50	—	6.35	9.50	14.30	—	—	806
40	1/2"	12.70	7.85	7.92	12.07	1.50	3.98	22.90	3.30	4.40	8.00	12.70	17.80	12.70	17.40	1418
50	5/8"	15.875	9.40	10.16	15.09	2.00	5.09	28.70	5.10	5.40	10.30	15.90	23.40	15.90	23.05	2224
60	3/4"	19.05	12.57	11.91	18.10	2.40	5.96	34.60	6.50	—	11.90	19.05	28.20	18.30	27.10	3194
80	1"	25.40	15.75	15.88	24.13	3.20	7.94	45.70	6.75\8.90	8.90	15.90	25.40	36.60	24.60	35.45	5673
100	1-1/4"	31.75	18.90	19.05	30.17	4.00	9.54	56.55	—	10.90	—	—	—	31.80	44.00	8878


Any special specifications, please feel free to contact us.

ROLLER CHAIN ATTACHMENTS


WSA2

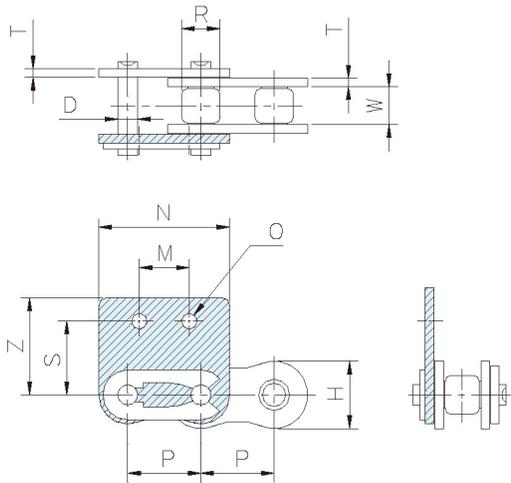


WSK2

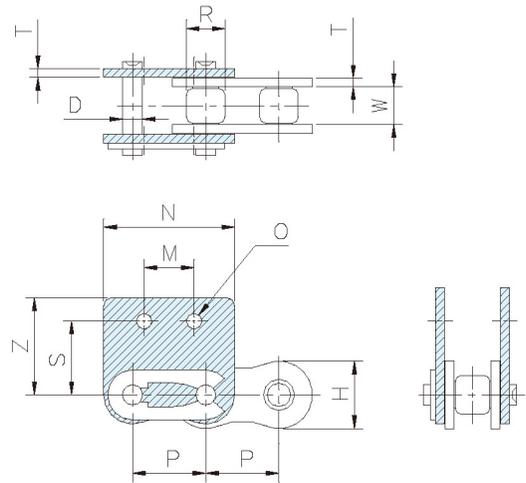

WA2

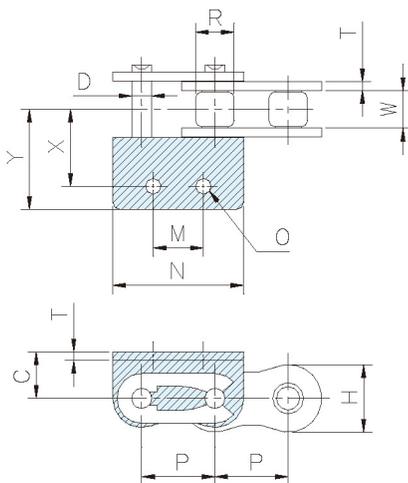

WK2

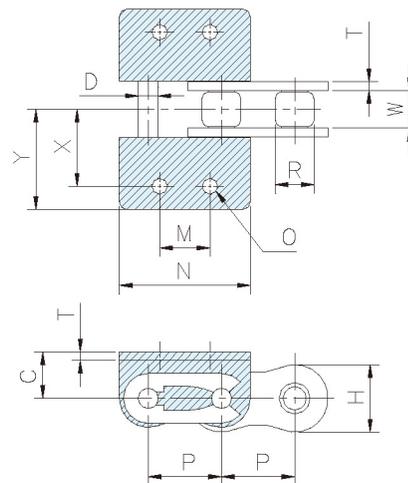

CHAIN NO.	Pitch		Width	Roller	Plate		Pin	Attachment								Ultimate Strength kgf(min)		
	P		W	Dia	Height	Thick.	Dia	WA2 WK2	WSA2 WSK2	WA2,WK2			WSA2,WSK2					
	inch	mm	(min)	R(max)	H(max)	T	D(max)	M	N	O(min)	C	X	Y	S	Z			
40	1/2"	12.70	7.85	7.92	12.07	1.50	3.98	9.50	22.90	3.30	4.40	8.00	12.70	17.80	12.70	17.60	1418	
50	5/8"	15.875	9.40	10.16	15.09	2.00	5.09	11.90	28.70	5.10	5.40	10.30	15.90	23.40	15.90	23.05	2224	
60	3/4"	19.05	12.57	11.91	18.10	2.40	5.96	14.30	34.60	5.10	6.50	11.90	19.05	28.20	18.30	27.10	3194	
80	1"	25.40	15.75	15.88	24.13	3.20	7.94	19.1/25.4	19.10	45.70	6.75	8.90	15.90	25.40	36.60	24.60	35.45	5673
100	1-1/4"	31.75	18.90	19.05	30.17	4.00	9.54	23.80	56.55	10.90		19.80	31.75	44.90	31.80	44.00	8878	

Any special specifications, please feel free to contact us.