


BI-METAL THERMOMETERS ADJUSTANGLE

Adjustable angle bimetal thermometer is designed for specific applications where standard models may be unsuitable for easy reading. It incorporates a highly sensitive bimetallic helix sensing element which provides a direct reading accurate to $\pm 1\%$ of full scale reading. The rear adjustment screw offers easy recalibration to allow maximum accuracy at selected area of temperature range.

SPECIFICATIONS:

- Type number** : NBA-4" , NBA-3"
- Dial size** : 4" , 3"
- Case & bezel** : sus304 stainless steel
- Lens** : Glass
- Pointer** : Aluminum
- Dial** : Aluminum
- Connection** : sus304 stainless steel, 1/4" , 1/2" , 3/4"
NPT/BSP/PT
- Stem** : sus304 stainless steel
- Accuracy** : $\pm 1.0\%$
- Other Option Upon Request**

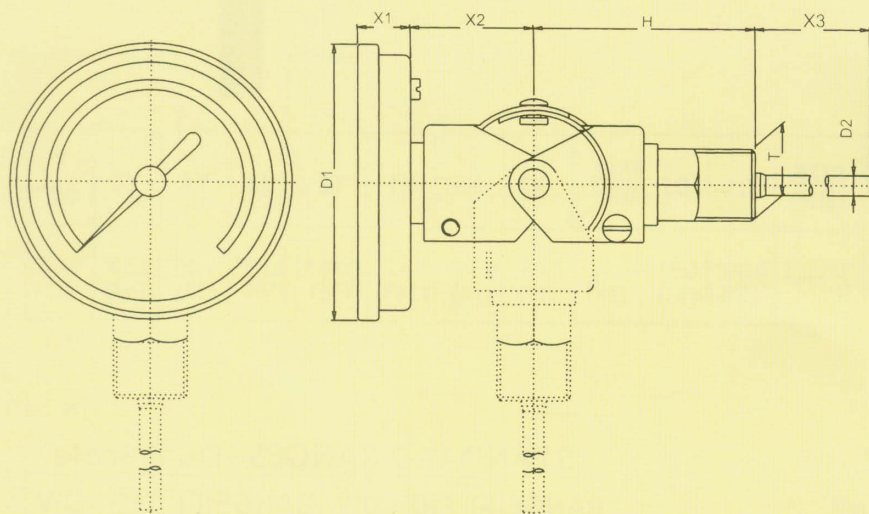

SIZE (MM)	D1	D2	X1	X2	H	T	
						3/8"	1/2"
4" (100)	4.21" (107)	0.23" (6)	0.67" (17)	1.34" (34)	2.67" (68)	-	0.82" (21)
3" (75)	3.1" (81)	0.23" (6)	0.59" (15)	1.33" (34)	2.67" (38)	-	0.82" (21)

STANDARD RANGES--Dual Scale

RANGE(F)	FIG	DIV	RANGE(F)	FIG	DIV
-60 to 120°F	20	2	-50 to 50°C	10	1
20 to 120°F	10	2	-10 to 50°C	10	1
40 to 200°F	20	2	0 to 100°C	10	1
40 to 240°F	20	2	0 to 120°C	20	2
50 to 300°F	50	2	0 to 200°C	30	2